







Z22 15°

Data Sheet. Z22 15°



15° LENS




digipto®
 TECHNOLOGIES PVT. LTD.



LED Light for you
 powered by OSRAM
 CERTIFIED PARTNER

PRODUCT FEATURES

* High Brightness Single Color LED Strip	15.80 mm X 16mm
* 2835 SMT Package	24 V DC Input Voltage
* High Luminous Intensity	Thermal Conductive adhesive tape on
* Slim Design	Back Side for better heat transmission
* High Reliability	15° beam angle
* Solid State, High Shock, Vibration resistant	3 Year Warranty
* Maintenance Free, Easy Installation, Long life	Good Thermal Conductivity
* very Low Power Consumption and Low Heat	
* Easy to Pack, ship and Install	

APPLICATIONS

General LED Lighting
Backlighting


Linear LED Lighting
Wall wash

Furniture Lighting
and more



TECHNICAL DETAILS

Profile	Size [WxHxL]	LED Package	PCB	LM/LED	Input Power	Watt / m	CCT	IP Grade
Z 22 -HP 15° LENS	15.80mm x 16.00x 1000 mm	2835/ 3014	FR4	120 LED/m	CV=24V DC	4.8W/m~ 28.8 W/m	2700K~ 6500K	IP 20 & IP67

LIGHT DISTRIBUTION 15°

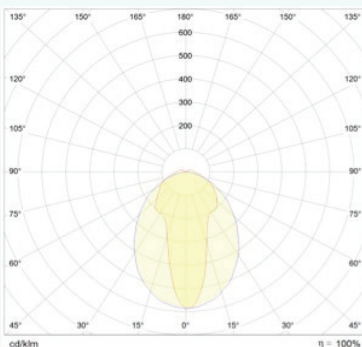

LED STRIP SPECIFICATION

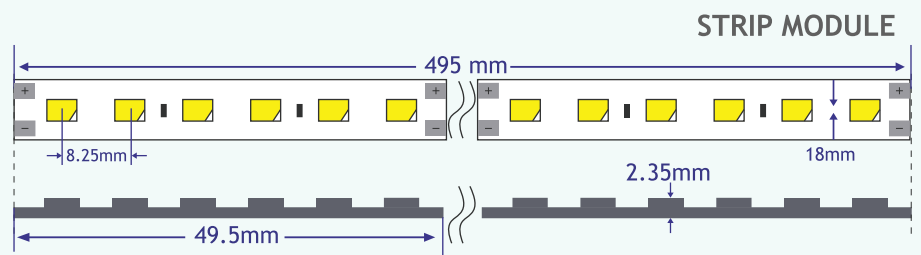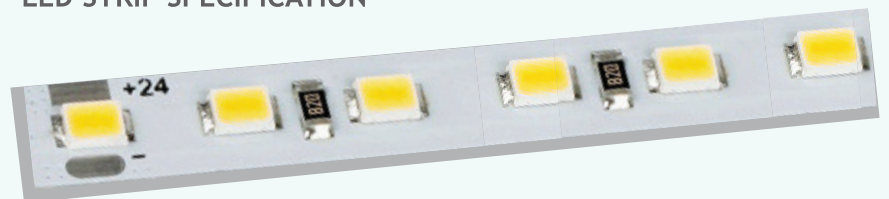

LENS SPECIFICATIONS

- ▶ Linear lens for PROFILE Z22W-2.
- ▶ For use exclusively with LED module.
- ▶ No tools required for installing
- ▶ Beam angle 15° (frosted only),
- ▶ Uni from Distribution of light
- ▶ Material : PMMA
- ▶ UV - resistant



Frost Lens

TECHNICAL DATA

Lenth	Coefficient of Linear Expansion	Operating Temperature	Storage Temperatures	1 Tolerance Length
2,0001 mm	85 * 10-6 / K	2835 / 3014	-30 ...+80°C	- 0 mm / + 20 mm

STANDARDS


The lens passed the heat filament test with 650°C as required in EN 60598-1

ACCESSORIES FOR Z22 15°PROFILE

End Cap



Mounting Clips

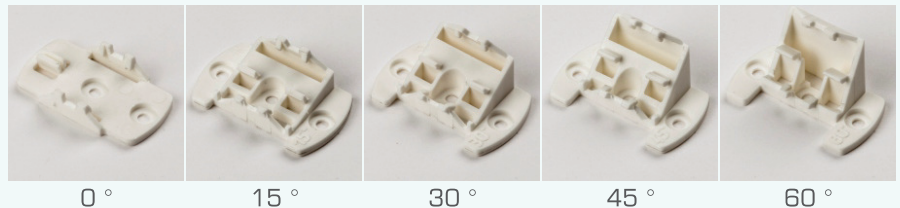

* 3 Year Warranty - IP 20, 1 Year Warranty - IP 67 (* Conditions Apply) Standard Configuration **

DISCLAIMER :- Subject to change without notice. Errors and omission excepted. Always make sure to use updated version. All product names, trademarks and registered trademarks are property of their respective owners.

TUNE -FLEXI 240

HIGH DENSITY TUNABLE FLEXIBLE LED STRIP

24 VOLT DC


9.6 W/M



2700K CCT TO 6500K CCT

19.2 W/M


Compatible with dimmable / Dali etc. standard tunable controllers and Wi-Fi controllers with remote

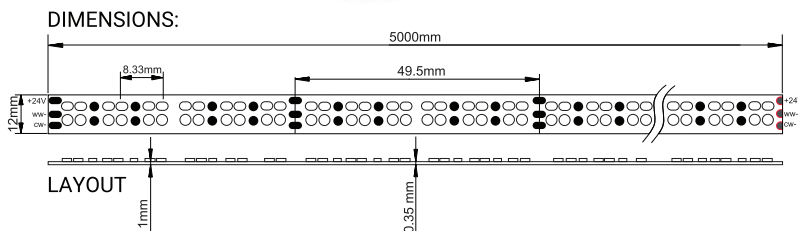

These tunable white BRIDGELUX LED strips are designed for long term professional human-centric lighting applications and are perfectly suited for linear lighting, cove lighting, curved applications. Each LED strip contains 120 warm and 120 cold white LEDs per meter and is available in 9.6 W and 19.2 W wattages

DGFS-2835-TUNE240-24V STRIP SPECIFICATIONS

* LED Package	2825 High Efficiency LED Package
* LED Lumen Efficacy	160 Lm Per Watt
* Input Voltage	24v Dc
* Wattage/meter	9.6 Watt / Mtr & 19.2watt/mtr
* Number Of LED	240 Led/mtr (2700k-120 & 6500k-120)
* Pcb Type	Flexible Type
* Pcb Size	5000mm X 12mm X 0.35mm
* LED Pitch	8.33mm
* Cuttable Size	49.5mm
* Viewing Angle	120 Degree
* Tape	Thermal Conductive Tape Pre-installed
* Cri	80 + Standard / 90 + On Demand
* Packing	5000 Mm Standard Reel Packing



S2A-A4 DOOR TRIGGER SENSOR
S3A-A4 HAND SHAKING SENSOR

TECHNICAL DATA

ITEM NO.:	S2A-A4	S3A-A4
* Voltage	DC12V~DC24V	
* Max Wattage	60W	
* Switch Mode	IR sensor	
* Function	Door trigger	Hand shaking
* Detecting Range	5-8cm	
* Dimension	Ø 11x14mm(Recessed),13*10*8mm(Surface clips)	
* Material & Finish	Plastic, Black	
* Protection Rating	IP20	

TECHNICAL DATA

ITEM NO.:	S2A-A4
* Voltage	DC12V~DC24V
* Max Wattage	60W
* Switch Mode	IR sensor
* Function	Double Door trigger
* Detecting Range	5-8cm
* Dimension	Ø 11x14mm(Recessed),13*10*8mm(Surface clips)
* Material & Finish	Plastic, Black
* Protection Rating	IP20




DOUBLE DOOR TRIGGER SENSOR




COMBINATION CHART

Recommended Groove Size: ① Switch hole size: 8mm(Dia), 14mm(Depth)

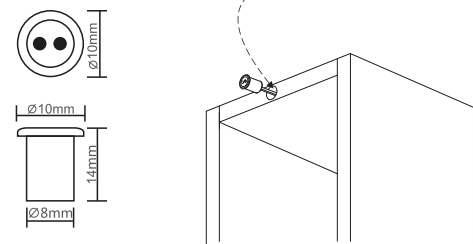

COMBINATION CHART

Recommended Groove Size: ① Switch hole size: 11mm(Dia), 16mm(Depth)

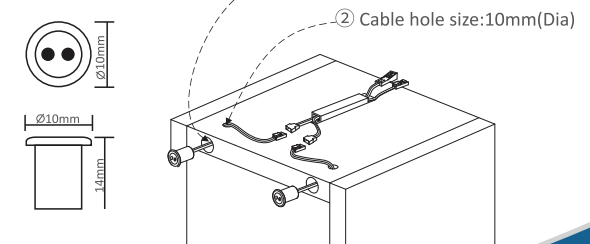



BOLD

WARDROBE LIGHT




THE UNSEEN SOURCE OF LIGHT
FOR YOUR WARDROBES





BOLD PROFILE

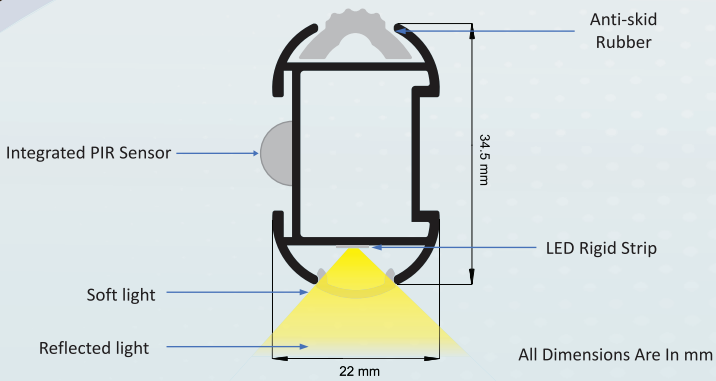

3 YEAR WARRANTY

BOLD TECHNICAL PARAMETERS

PRODUCT ORDER CODE	BOLD WARDROBE LIGHT
PROFILE MATERIAL	ALUMINUM 6063 T6 + PC DIFFUSER
POWER [WATT]	14.4W TO 19.2W / METER
CCT	3000K / 4000K / 5000K / 6500K
LED	120 LED / M BRIDGELUX USA 3 SDCM
CRI	80+ / 90+
SUPPLY	24 VDC
MAX LENGTH	3050 MM
DIFFUSER	OPAL
IP PROTECTION	IP20
SENSOR	INBUILT (OPTIONAL)

APPLICATIONS: WARDROBE LIGHT



MINICOVE

THE PLEASANT ARCHITECTURAL LIGHTING EVER

Powered by




WHAT IS MINICOVE:

MINICOVE is modern way of indirect illumination for indoor and outdoor areas in home and commercial areas. Designed specifically for indirect lighting, we make Sure, that the profile is good enough to take power up to 25 watts per meter and matches with your ceiling cove. What's more! MINICOVE also comes with wide range of Color temperatures and CRI's and is powered by AMERICAN BRIDGELUX LED. Amazingly simple installation makes it easy for any local fabrication to execute in no time.




- **STANDARD SPECIFICATIONS:**
- CRI = 80+ / 90 +
- LED 3 SDCM 2835 CHIP BRIDGELUX
- CCT: 2200K/2700K/3000K/3500K/4000K/5000K/6500K
- STRONG ALUMINIUM PROFILE HEAT SINK WITH METAL END CAPS
- FINISH OF PROFILE: WHITE/GRAY/BLACK
- LED: 120 LED PER MEER REEL WITH CONNECTORS AND DRIVER
- DOTLESS HOMOGENEOUS LIGHTING EFFECT
- CONTINUOUS MILKY DIFFUSER UP TO 10 METER LONG
- IP 20/IP67
- CUSTOMIZE POWER FROM 10 TO 25 WATTS PER METER

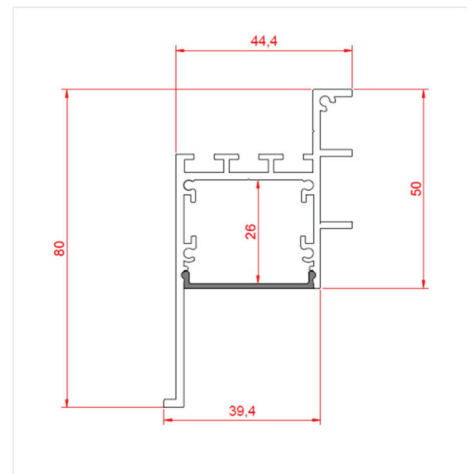


MINICOVE DIMENTIONS IN MM

INSTALLATION

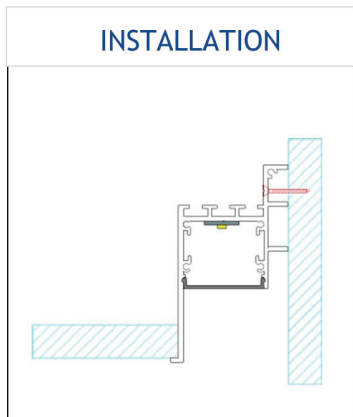

❖ APPLICATIONS:

- RESIDENCE
- OFFICE
- HOTEL
- CORRIDOR



RAJ ELECTRICALS

583, Narayan Peth, Near Kanyashala, Pune-411030.

E-Mail:-lighting@rajelectricals.co.in ,

Web Site:- www.rajelectricals.co.in

Mobile- 9822332340 / 9881245432


INVEE ... truly invisible ...

ZERO GLARE ZERO GLARE




The Invisible source of Light for your shelves and wardrobes

INSTALLATION EXAMPLE OF INVEE



Recessed type installation in 18 mm wooden plate

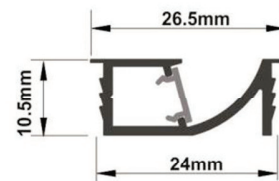


All dimensions are in mm

INVEE TECHNICAL PARAMETERS

PRODUCT ORDER CODE	INVEE LINEAR LIGHT
PROFILE MATERIAL	ALUMINIUM 6063 T6 + PC DIFFUSER
POWER [WATT]	7.2W TO 11.52W / METER
CCT	3000K / 4000K/ 5000K / 6500K
LED	144 LED / M BRIDGELUX USA 3 SDCM
CRI	80+ / 90+
MAX LENGTH	3050 MM
DIFFUSER	OPAL / FROSTED
APPLICATION METHOD	RECESSED

APPLICATIONS: WARDROBES, KITCHEN SHELVES, RETAIL FURNITURES

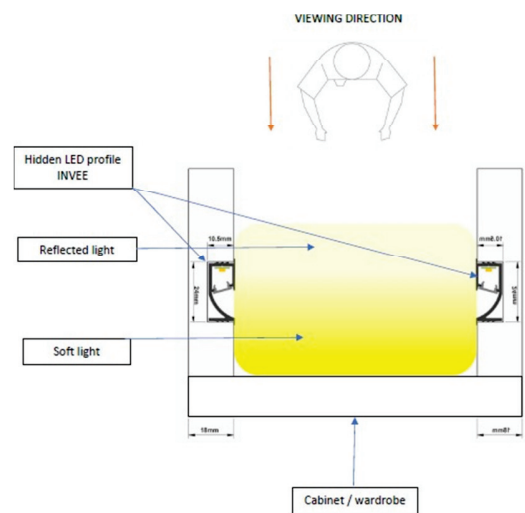

RAJ ELECTRICALS

Regis Off - 583, Narayan Peth, Near Kanyashala, Pune-411030.
Branch Off - 353/2, Shaniwar Peth, Ramanbaug Co-operative Hsg Society,
Near Ramanbaug School, Pune-411030.

☎ (020) 24455293, 24461156, 24481583, 24486306.

📍 Mr.Laxmikant Laddha -09822332340, Giriraj Laddha-09881245431, Rahul Laddha-09881245432. / Email-sales@rajelectricals.co.in

DigiLED 





2019

LINEAR LIGHTING FASHION



RAJ ELECTRICALS

PRODUCT CATALOG 2018-2019




Contents

- SURFACE LINEAR LIGHTING** 3
- OPTIMA 3
- OMEGA..... 4
- BATTY 5
- ELITO 6
- MERCURY 7
- NEON LITE [dot less] 8
- VEGA 9
- LIMO..... 10
- N-LINE [dot less]..... 11
- DECOLINE [dot less] 12
- GLOWSTICK [dot less] 13
- LEXO-LITE [dot less]..... 14
- TURBO-LITE [dot less] 15
- RECESSES LINEAR LIGHTING** 16
- FURLITE 16
- NOOKY..... 17
- TUB-LINE [dot less]..... 18
- TUX-LINE [dot less]..... 19
- PRIMO-LITE 20
- SNOW-LITE 21
- MAX-LITE..... 22

SUSPENDED LINEAR LIGHTING	23
MOON-LINE.....	23
SHARP-LINE [dot less]	24
ULTRA-LINE [dot less].....	25
EX-LINE [dot less]	26
TRACK-LINE [3 IN 1 LIGHT]	27
AQUALINA [TRIPROOF-OUTDOOR] [dot less]	28
CORNER LINEAR LIGHTING	29
SPECTRA	29
VERSAC.....	30
ARISTRO	31
ARCLIT [dot less]	32
DISPLAY LINEAR LIGHTING	33
CABI-LITE	33
CABICA	34
CAROLUX.....	35
ORIO	36
G-LUX	37
WARDROBE LINEAR LIGHTING	38
GRACE-LITE.....	38
STAIRCASE LINEAR LIGHTING	39
STEPON [dot less].....	39

SURFACE LINEAR LIGHTING

OPTIMA

Profile	Picture	Cross section/dimensions	Product picture	Standard specifications
ART				CV 11.52 W/METER

OPTIMA

SURFACE LINEAR LIGHT

PROFILE	SIZE [W X H] MM	LED PACKAGE	CRI	LM/LED	INPUT POWER	MAXIMUM WATT/M	APX. WEIGHT KG /M	COATING
ART	11 X 5	2835	70-85	24-26	CV = 12 V DC	11.52	00 KG	IP30/IP65




OPTIONS

DIFFUSER		CCT [K]		WATTS/M	LED/METER
SLF	N/A	K1	2700	4.8 to 11.52	30
PFM	N/A	K2	3000		48
PFF	N/A	K3	4000		
PFC	N/A	K4	5700		
SLR	N/A	K5	6500		
		K6	8000		



STANDARD SIZES:	300 MM 500 MM	1000 MM 2000 MM	7.2/11.52	CUSTOM SIZE CHARGE	20% EXTRA	Applications: Under cabinet, kitchen, furniture, small coves etc.
-----------------	------------------	--------------------	-----------	-----------------------	-----------	--

OMEGA

Profile	Picture	Cross section/dimensions	Product picture	Standard specifications
SLIDER				<p>CV 11.52 W/METER</p>

OMEGA

SURFACE LINEAR LIGHT

PROFILE	SIZE [W X H]	LED PACKAGE	CRI	LM/LED	INPUT POWER	MAXIMUM WATT/M	APX. WEIGHT KG /M	COATING
SLIDER	9.90 X 5.30	2835	70-85	24-26	CV = 12 V DC	11.52	00 KG	IP30

OPTIONS

DIFFUSER		CCT [K]		WATTS/M	LED/METER
SLF	FROSTED	K1	2700	4.8 to 11.52	30
PFM	N/A	K2	3000		48
PFF	N/A	K3	4000		
PFC	N/A	K4	5700		
SLR	N/A	K5	6500		
		K6	-		



STANDARD SIZES:

500 MM

1000 MM
2000 MM




7.2/11.52

CUSTOM SIZE
CHARGE


20% EXTRA

Applications: Under cabinet, kitchen, furniture, small coves etc.




BATTY

Profile	Picture	Cross section/dimensions	Product picture	Standard specifications
BATON				CV 11.52 W/METER

BATTY							SURFACE LINEAR LIGHT	
PROFILE	SIZE [W X H]	LED PACKAGE	CRI	LM/LED	INPUT POWER	MAXIMUM WATT/M	APX. WEIGHT KG /M	COATING
BATON	7.60 X 9	2835/3014/2016/	70-85/94	9-26	CV = 12 V DC CV = 24 V DC	11.52	00 KG	IP30
OPTIONS								
DIFFUSER		CCT [K]		WATTS/M	LED/METER			
SLF	N/A	K1	2700	4.8 to 11.52	48/2835			
PFM	PRESS FIT OPAL	K2	3000					
PFF	N/A	K3	4000		84/3528			
PFC	N/A	K4	5000					
SLR	N/A	K5	6500		144/2016			
STANDARD SIZES:		500 MM	1000 MM 2000 MM	6.72/ 7.2/11.52	CUSTOM SIZE CHARGE	20% EXTRA	Applications: under cabinet, kitchen, furniture, decorative etc.	



ELITO

Profile	Picture	Cross section/dimensions	Product picture	Standard specifications
ELITE				<p>CV 7.2 W/METER</p>

ELITO

SURFACE LINEAR LIGHT

PROFILE	SIZE [W X H]	LED PACKAGE	CRI	LM/LED	INPUT POWER	MAXIMUM WATT/M	APX. WEIGHT KG /M	COATING
ELITE	8 X 5.70	2835/3014/3528/5050	70-85	9-26	CV = 12 V DC	7.2	00 KG	IP30/IP65




OPTIONS

DIFFUSER		CCT [K]		WATTS/M	LED/METER
SLF	N/A	K1	2700	4.8 to 7.2	48/2835
PFM	N/A	K2	3000		60/3014
PFF	N/A	K3	4000		84/3528
PFC	N/A	K4	5700		
SLR	N/A	K5	6500		
		K6	R/G/B/A		



STANDARD SIZES:	500 MM	1000 MM	4.8/7.2/6.72	CUSTOM SIZE CHARGE	20% EXTRA	Applications: under cabinet, kitchen, small coves, edge lighting etc.
-----------------	--------	---------	--------------	--------------------	-----------	--

MERCURY

Profile	Picture	Cross section/dimensions	Product picture	Standard specifications
MASTER				<p>CV 19.2 W/METER</p>

MERCURY

SURFACE LINEAR LIGHT

PROFILE	SIZE [W X H]	LED PACKAGE	CRI	LM/LED	INPUT POWER	MAXIMUM WATT/M	APX. WEIGHT KG /M	COATING
MASTER	17.10 X 7.90	2835/3014/2016/ 5630/5730	70-85	9-31	CV = 12 V DC CV = 24 V DC	19.2	00 KG	IP30/IP65




OPTIONS

DIFFUSER		CCT [K]		WATTS/M 4.8 to 19.2	LED/METER	
SLF	N/A	K1	2700			30/2835
PFM	PRESS FIT OPAL	K2	3000			48/2835
PFF	PRESS FIT FROSTED	K3	4000			60/2835/ 3014/2016/ 5630/5730
PFC	PRESS FIT CLEAR	K4	5000			72/5730
		K5	6500			84/2016
		K6	R/G/B/A/RGB			120/206 240/3528



STANDARD SIZES:	500 MM	1000 MM 2000 MM	4.8/7.2/11.52/14.4/19.2	CUSTOM SIZE CHARGE	20% EXTRA	Applications: coves, architectural , furniture, various indoor and outdoor lightings etc.
-----------------	--------	--------------------	-------------------------	-----------------------	-----------	--

NEON LITE

Profile	Picture	Cross section/dimensions	Product picture	Standard specifications
MASTER WITH DOTLESS DIFFISER				CV 19.2W/METER


NEON LITE

SURFACE LINEAR LIGHT

PROFILE	SIZE [W X H]	LED PACKAGE	CRI	LM/LED	INPUT POWER	MAXIMUM WATT/M	APX. WEIGHT KG /M	COATING
MASTER D	17.10 X 7.90	2835/3014/2016/ 5630/5730	70-85	9-31	CV = 12 V DC CV = 24 V DC	19.2	00 KG	IP30/IP65




OPTIONS

DIFFUSER		CCT [K]		WATTS/M	LED/METER
SLF	N/A	K1	2700	4.8 to 19.2	30/2835
		K2	3000		48/2835
		K3	4000		60/2835/ 3014/2016/ 5630/5730
		K4	5000		72/5730
		K5	6500		84/2016
SLR	SLIDE OPAL [NO DOT] EXTRA COST	K6	R/G/B/A/RGB		120/206
				240/3528	

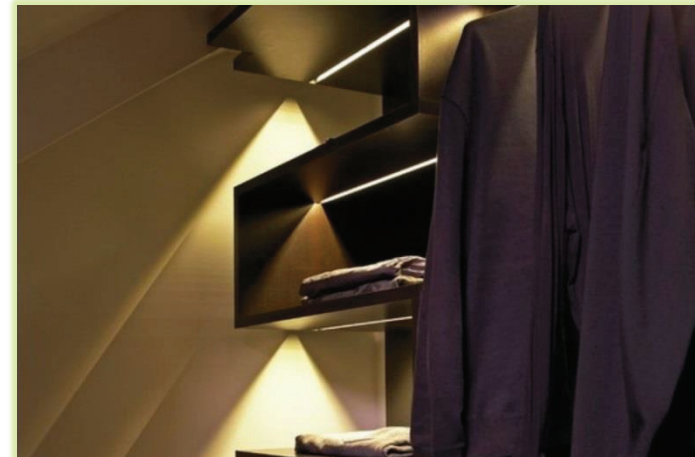

STANDARD SIZES:	500 MM	1000 MM 2000 MM	4.8/7.2/11.52/14.4/19.2	CUSTOM SIZE CHARGE	20% EXTRA	Applications: architectural , decorative, various indoor and outdoor lightings etc.,
-----------------	--------	--------------------	-------------------------	--------------------	-----------	---

VEGA

Profile	Picture	Cross section/dimensions	Product picture	Standard specifications
NEPTUNE WITH FROSTED DIFFUSER				CV 14.4 W/METER

VEGA

SURFACE LINEAR LIGHT

PROFILE	SIZE [W X H]	LED PACKAGE	CRI	LM/LED	INPUT POWER	MAXIMUM WATT/M	APX. WEIGHT KG /M	COATING
NEPTUNE	14.70 X 8.50	2835/3014/2016/	70-85	9-31	CV = 12 V DC CV = 24 V DC	14.4	00 KG	IP30/IP65




OPTIONS


DIFFUSER		CCT [K]		WATTS/M	LED/METER
SLF	FROSTED	K1	2700		
PFM	N/A	K2	3000	48/2835	
PFF	N/A	K3	4000	60/2835/2916	
PFC	N/A	K4	5000	-	
SLR	N/A	K5	6500	-	
		K6	R/G/B/A/RGB	-	






STANDARD SIZES:	500 MM	1000 MM 2000 MM	4.8/7.2/11.52/14.4	CUSTOM SIZE CHARGE	20% EXTRA	Applications: Coves, under cabinet, furniture, general purpose low cost lighting etc.
-----------------	--------	--------------------	--------------------	-----------------------	-----------	--

LIMO

Profile	Picture	Cross section/dimensions	Product picture	Standard specifications
NANO				CV 4.8 W/METER

LIMO							SURFACE LINEAR LIGHT	
PROFILE	SIZE [W X H]	LED PACKAGE	CRI	LM/LED	INPUT POWER	MAXIMUM WATT/M	APX. WEIGHT KG /M	COATING
NANO	7 X 5	2835/3014/3528	70-85	9-26	CV = 12 V DC	6.72	00 KG	IP30
OPTIONS								
DIFFUSER		CCT [K]		WATTS/M	LED/METER			
SLF	N/A	K1	2700	4.8 to 6.72				
PFM	N/A	K2	3000					
PFF	N/A	K3	4000					
PFC	N/A	K4	-					
SLR	N/A	K5	6500					
		K6	8000					
STANDARD SIZES:		500 MM	1000 MM 2000 MM	4.8/6.72	CUSTOM SIZE CHARGE	20% EXTRA	Applications: under cabinet, kitchen, furniture, bathroom, bedroom, guest rooms etc.	

N-LINE

Profile	Picture	Cross section/dimensions	Product picture	Standard specifications
TOP 1828				<p>CV 24 W/METER</p>

N-LINE

SURFACE LINEAR LIGHT

PROFILE	SIZE [W X H]	LED PACKAGE	CRI	LM/LED	INPUT POWER	MAXIMUM WATT/M	APX. WEIGHT KG /M	COATING
TOP 1828	17.10 X 27.80	2835/3014/2016/ 5630/5730/5050	70-85	9-31	CV = 12 V DC CV = 24 V DC	22	00 KG	IP30/IP65




OPTIONS

DIFFUSER		CCT [K]		WATTS/M	LED/METER
SLF	N/A	K1	2700	4.8 to 24	
PFM	PRESS FIT OPAL	K2	3000		
PFF	PRESS FIT FROSTED	K3	4000		60/2835/3014/ 2016/5050
PFC	PRESS FIT CLEAR	K4	5000		72/5730
SLR	SLIDE OPAL [NO DOT] EXTRA COST	K5	6500		84/2016
		K6	R/G/B/A/RGB		120/2016 240/3528



STANDARD SIZES:	500 MM 1000 MM	1200 MM 2000 MM	14.4/19.2/22	CUSTOM SIZE CHARGE	20% EXTRA	Applications: Architectural lighting, decorative, suspended lighting etc.
-----------------	-------------------	--------------------	--------------	-----------------------	-----------	--

DECOLINE

Profile	Picture	Cross section/dimensions	Product picture	Standard specifications
DECOR				<p>CV 19.2 W/METER</p>

DECOLINE

SURFACE LINEAR LIGHT

PROFILE	SIZE [W X H]	LED PACKAGE	CRI	LM/LED	INPUT POWER	MAXIMUM WATT/M	APX. WEIGHT KG /M	COATING
DECOR	17.10 X 14.50	2835/2016/3014	70-85	24-31	CV = 12 V DC CV = 24 V DC	19.2	00 KG	IP30/IP65




OPTIONS

DIFFUSER		CCT [K]		WATTS/M	LED/METER
SLF	N/A	K1	2700	4.8 to 19.2	60/2016/2835
PFM	PRESS FIT OPAL	K2	3000		84/2016/3528
PFF	PRESS FIT FROSTED	K3	4000		120/2016/2835
PFC	PRESS FIT CLEAR	K4	5000		
SLR	SLIDE OPAL [NO DOT] EXTRA COST	K5	6500		
		K6	8000		



STANDARD SIZES:	500 MM	1000 MM 2000 MM	11.52/14.4/19.2	CUSTOM SIZE CHARGE	20% EXTRA	Applications: under cabinet, kitchen, furniture, cove, decorative dotless lighting etc.
-----------------	--------	--------------------	-----------------	--------------------	-----------	--

GLOWSTICK

Profile	Picture	Cross section/dimensions	Product picture	Standard specifications
PLUTO				CV 14.4W/METER

GLOWSTICK

SURFACE LINEAR LIGHT

PROFILE	SIZE [W X H]	LED PACKAGE	CRI	LM/LED	INPUT POWER	MAXIMUM WATT/M	APX. WEIGHT KG /M	COATING
PLUTO	13 X 10	2835/3014/2016/	70-85	9-26	CV = 12 V DC CV = 24 V DC	14.4	00 KG	IP30/IP65



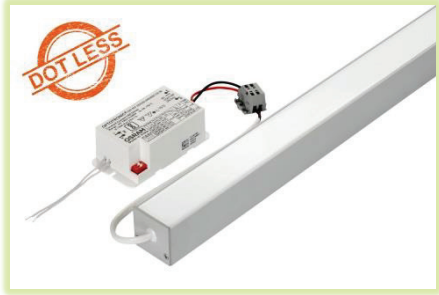
OPTIONS

DIFFUSER		CCT [K]		WATTS/M	LED/METER
SLF	N/A	K1	2700	4.8 to 14.4	48/2835
PFM	PRESS FIT OPAL	K2	3000		60/3014
PFF	N/A	K3	4000		84/3528
PFC	N/A	K4	5000		144/2016
SLR	N/A	K5	6500		144/2016
		K6	R/G/B/A/RGB		144/2016



STANDARD SIZES:	500 MM	1000 MM 2000 MM	7.2/9.6/11.52/14.4	CUSTOM SIZE CHARGE	20% EXTRA	Applications: under cabinet, kitchen, furniture, decorative, Architectural lighting etc.
-----------------	--------	--------------------	--------------------	-----------------------	-----------	---

LEXO-LITE

Profile	Picture	Cross section/dimensions	Product picture	Standard specifications
LEX				<p>CC 22.00 W/ 1.2 METER</p>

LEXO-LITE

RECESSED LINEAR LIGHT

PROFILE	SIZE [W X H]	LED PACKAGE	CRI	LM/LED	INPUT POWER	MAXIMUM WATT/M	APX. WEIGHT KG /M	COATING
LEX	35.40 X 35	2835/3014/2016/5630	70-85	24-31	CV = 12 V DC CV = 24 V DC CC ON DEMAND	28.8	00 KG	IP30/IP65

OPTIONS

DIFFUSER		CCT [K]		WATTS/M	LED/METER
SLF	N/A	K1	2700	14.4-28.8	
PFM	PRESS FIT OPAL	K2	3000		
PFF	N/A	K3	4000		60/2835/3014/ 2016/5630
PFC	N/A	K4	5000		72/5730
SLR	N/A	K5	6500		84/2016
		K6	R/G/B/A/RGB		120/2835/2016



STANDARD SIZES:

600 MM

1200 MM
2400 MM



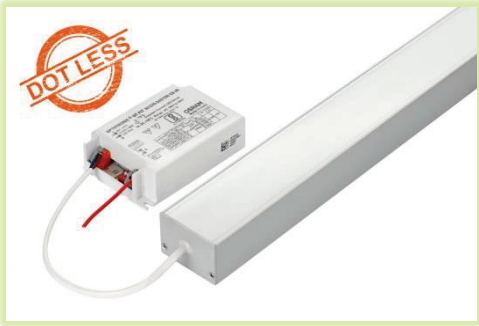
14.4/19.2/28.8

CUSTOM SIZE
CHARGE

20% EXTRA

Applications: Surface lighting, under cabinet, kitchen, furniture, ceiling decoration etc.

TURBO-LITE

Profile	Picture	Cross section/dimensions	Product picture	Standard specifications
CRUIZ				<p>CC 35.00 W/1.2 METER</p>

TURBO-LITE						SURFACE LINEAR LIGHT		
PROFILE	SIZE [W X H]	LED PACKAGE	CRI	LM/LED	INPUT POWER	MAXIMUM WATT/M	APX. WEIGHT KG /M	COATING

CRUIZ	50 X 35	2835/3014/2016	70-85	24-31	CC CV = 24 V DC	40	00 KG	IP30/IP65
-------	---------	----------------	-------	-------	--------------------	----	-------	-----------

OPTIONS								
DIFFUSER		CCT [K]		WATTS/1.2M	LED/1.2METER			




SLF	N/A	K1	2700	35 W	182/3014 CC			
PFM	PRESS FIT OPAL	K2	3000		182/2835 CC			
PFF	N/A	K3	4000		180/2835 CC			
PFC	N/A	K4	5000		180/2016 CC			
SLR	N/A	K5	6500		96/2835 CV ?			
		K6	-					



STANDARD SIZES:	600 MM	1200 MM 2400 MM	ORDER SIZE MULTIPLE OF : 300 MM	CUSTOM SIZE CHARGE	20% EXTRA	Applications: commercial linear lighting for surface applications etc.
-----------------	--------	--------------------	------------------------------------	-----------------------	-----------	---

RECESSES LINEAR LIGHTING

FURLITE

Profile	Picture	Cross section/dimensions	Product picture	Standard specifications
GROOVY				<p>CV 14.4 W/METER</p>

FURLITE

RECESSED LINEAR LIGHT

PROFILE	SIZE [W X H]	LED PACKAGE	CRI	LM/LED	INPUT POWER	MAXIMUM WATT/M	APX. WEIGHT KG /M	COATING
GROOVY	21 X 8	2835/3528/ 3014/2016/ 5630/5730	70-85	9-31	CV = 12 V DC CV = 24 V DC	14.4	00 KG	IP30




OPTIONS

DIFFUSER		CCT [K]		WATTS/M	LED/METER
SLF	N/A	K1	2700		
PFM	PRESS FIT OPAL	K2	3000	48/2835	
PFF	PRESS FIT FROSTED	K3	4000	60/2016/3014/ 2835	
PFC	PRESS FIT CLEAR	K4	5000	72/3014	
SLR	SLIDE OPAL DOTLESS EXTRA COST	K5	6500	84/2016	
		K6	8000	120/2016/3528	




STANDARD SIZES:	500 MM	1000 MM 2000 MM	4.8/7.2/9.6/11.52/14.4	CUSTOM SIZE CHARGE	20% EXTRA	Applications: under cabinet, kitchen, furniture grooves, wardrobe, study tables etc.
-----------------	--------	--------------------	------------------------	--------------------	-----------	--




NOOKY

Profile	Picture	Cross section/dimensions	Product picture	Standard specifications
NOOK				CV 19.2 W/METER

NOOKY							RECESSED LINEAR LIGHT	
PROFILE	SIZE [W X H]	LED PACKAGE	CRI	LM/LED	INPUT POWER	MAXIMUM WATT/M	APX. WEIGHT KG /M	COATING
NOOK	21.10 X 8.70	2835/3528/ 3014/2016/ 5630/5730	70-85	24-31	CV = 12 V DC CV = 24 V DC	19.2	00 KG	IP30
OPTIONS								
DIFFUSER		CCT [K]		WATTS/M	LED/METER			
SLF	N/A	K1	2700	4.8 to 19.2	30/2835			
PFM	PRESS FIT OPAL	K2	3000		48/2835			
PFF	PRESS FIT FROSTED	K3	4000		60/2016/3014/ 2835			
PFC	PRESS FIT CLEAR	K4	5000		72/3014			
SLR	SLIDE OPAL DOTLESS EXTRA COST	K5	6500		84/2016			
		K6	8000		120/2016			
STANDARD SIZES:		500 MM	1000 MM 2000 MM	4.8/7.2/9.6/11.52/14.4/19.2	CUSTOM SIZE CHARGE	20% EXTRA	Applications: under cabinet, kitchen, furniture, wardrobes etc.	



TUB-LINE

Profile	Picture	Cross section/dimensions	Product picture	Standard specifications
TUB				<p>CV 19.2 W/METER</p>

TUB-LINE

RECESSED LINEAR LIGHT

PROFILE	SIZE [W X H]	LED PACKAGE	CRI	LM/LED	INPUT POWER	MAXIMUM WATT/M	APX. WEIGHT KG /M	COATING
TUB	23.20 X 18.65	2835/3528/ 3014/2016/5630	70-85	9-31	CV = 12 V DC CV = 24 V DC	19.2	00 KG	IP30/IP65




OPTIONS

DIFFUSER		CCT [K]		WATTS/M	LED/METER	
SLF	N/A	K1	2700			4.8 to 19.2
PFM	PRESS FIT OPAL	K2	3000			
PFF	PRESS FIT FROSTED	K3	4000			
PFC	PRESS FIT CLEAR	K4	5000			
SLR	SLIDE OPAL DOTLESS EXTRA COST	K5	6500	84/2016		
		K6	8000	120/2016/2835		



STANDARD SIZES:	500 MM	1000 MM 2000 MM	4.8/9.6/14.4/19.2	CUSTOM SIZE CHARGE	20% EXTRA	Applications: recessed linear lighting, under cabinet, kitchen, furniture etc.
-----------------	--------	--------------------	-------------------	-----------------------	-----------	---

TUX-LINE

Profile	Picture	Cross section/dimensions	Product picture	Standard specifications
TUBEX				CV 19.2 W/METER

TUX-LINE

RECESSED LINEAR LIGHT

PROFILE	SIZE [W X H]	LED PACKAGE	CRI	LM/LED	INPUT POWER	MAXIMUM WATT/M	APX. WEIGHT KG /M	COATING
TUBEX	23.20 X 26.70	2835/3528/ 3014/2016/	70-85	9-31	CV = 12 V DC CV = 24 V DC	22	00 KG	IP30/IP65




OPTIONS


DIFFUSER		CCT [K]		WATTS/M	LED/METER
SLF	N/A	K1	2700	4.8 to 22	
PFM	PRESS FIT OPAL	K2	3000		
PFF	PRESS FIT FROSTED	K3	4000		60/2016/3014/ 2835
PFC	PRESS FIT CLEAR	K4	5000		
SLR	SLIDE OPAL DOTLESS EXTRA COST	K5	6500		84/2016
		K6	8000		120/2016






STANDARD SIZES:	500 MM	1000 MM 2000 MM	4.8/9.6/14.4/19.2	CUSTOM SIZE CHARGE	20% EXTRA	Applications: Recessed linear lighting for ceiling etc.
-----------------	--------	--------------------	-------------------	-----------------------	-----------	--

PRIMO-LITE

Profile	Picture	Cross section/dimensions	Product picture	Standard specifications
VESSEL				<p>CC 22.00 W/ 1.2 METER</p>

PRIMO-LITE							RECESSED LINEAR LIGHT	
PROFILE	SIZE [W X H]	LED PACKAGE	CRI	LM/LED	INPUT POWER	MAXIMUM WATT/M	APX. WEIGHT KG /M	COATING
VESSEL	45.75 X 35	2835/3014/2016/5630	70-85	24-31	CV = 12 V DC CV = 24 V DC CC ON DEMAND	28.8	00 KG	IP30/IP65
OPTIONS								
DIFFUSER		CCT [K]		WATTS/M	LED/METER			
SLF	N/A	K1	2700	14.4-28.8				
PFM	PRESS FIT OPAL	K2	3000					
PFF	N/A	K3	4000					
PFC	N/A	K4	5000					
SLR	N/A	K5	6500					
		K6	R/G/B/A/RGB					
STANDARD SIZES:		600 MM	1200 MM 2400 MM	14.4/19.2/28.8	CUSTOM SIZE CHARGE	20% EXTRA	Applications: recessed lighting, under cabinet, kitchen, furniture, ceiling decoration etc.	

SNOW-LITE

Profile	Picture	Cross section/dimensions	Product picture	Standard specifications
HELIOS				CC 35.00 W/1.2 METER

SNOW-LITE

RECESSED LINEAR LIGHT

PROFILE	SIZE [W X H]	LED PACKAGE	CRI	LM/LED	INPUT POWER	MAXIMUM WATT/M	APX. WEIGHT KG /M	COATING
HELIOS	65 X 32	2835/3014/2016	70-85	24-31	CC CV = 24 V DC	40	00 KG	IP30/IP65




OPTIONS


DIFFUSER		CCT [K]		WATTS/1.2M	LED/1.2METER
SLF	N/A	K1	2700	35 W	182/3014 CC
PFM	PRESS FIT OPAL	K2	3000		182/2835 CC
PFF	N/A	K3	4000		180/2835 CC
PFC	N/A	K4	5000		180/2016 CC
SLR	N/A	K5	6500		96/2835 CV ?
		K6	-		



STANDARD SIZES:	600 MM	1200 MM 2400 MM	ORDER SIZE MULTIPLE OF : 300 MM	CUSTOM SIZE CHARGE	20% EXTRA	Applications: commercial linear lighting for recessed applications etc.
-----------------	--------	--------------------	------------------------------------	-----------------------	-----------	---




MAX-LITE

Profile	Picture	Cross section/dimensions	Product picture	Standard specifications
APOLLO				<p>CC 35.00 W/1.2 METER</p>

MAX-LITE							RECESSED LINEAR LIGHT		
PROFILE	SIZE [W X H]	LED PACKAGE	CRI	LM/LED	INPUT POWER	MAXIMUM WATT/M	APX. WEIGHT KG /M	COATING	
APOLLO	90 X 32	2835/3014/2016	70-85	24-31	CC CV = 24 V DC	80	00 KG	IP30/IP65	
OPTIONS									
DIFFUSER		CCT [K]		WATTS/M	LED/METER				
SLF	N/A	K1	2700	70 W	182/3014 CC				
PFM	PRESS FIT OPAL	K2	3000		182/2835 CC				
PFF	N/A	K3	4000		180/2835 CC				
PFC	N/A	K4	5000		180/2016 CC				
SLR	N/A	K5	6500		192/2835 CV				
		K6	-						
STANDARD SIZES:		600 MM	1200 MM 2400 MM	ORDER SIZE MULTIPLE OF : 300 MM	CUSTOM SIZE CHARGE	20% EXTRA	 <p>Applications: commercial linear lighting for professional applications etc.</p>		

SUSPENDED LINEAR LIGHTING

MOON-LINE

MOON-LINE				
Profile	Picture	Cross section/dimensions	Product picture	Standard specifications
MOON				CV 19.2 W/METER

MOON-LITE

SUSPENDED LINEAR LIGHT

PROFILE	SIZE [W X H]	LED PACKAGE	CRI	LM/LED	INPUT POWER	MAXIMUM WATT/M	APX. WEIGHT KG /M	COATING
MOON	20.60 X 14.30	2835/3528/ 3014/2016/ 5630/5730	70-85	9-31	CV = 12 V DC CV = 24 V DC	19.2	00 KG	IP30/IP65




OPTIONS

DIFFUSER		CCT [K]		WATTS/M	LED/METER
SLF	N/A	K1	2700	4.8 to 19.2	30/2835
PFM	PRESS FIT OPAL	K2	3000		48/2835
PFF	N/A	K3	4000		60/2835/2016/ 3014
PFC	N/A	K4	5000		72/3014
SLR	N/A	K5	6500		84/2016/3528
		K6	8000		120/2016/2835



STANDARD SIZES:	500 MM	1000 MM 2000 MM	4.8/7.2/11.52/14.4/19.2	CUSTOM SIZE CHARGE	20% EXTRA	Applications: suspended, wall mounted, OFFICE, RETAIL, STORE, RESIDENTIAL ETC.
-----------------	--------	--------------------	-------------------------	--------------------	-----------	---

SHARP-LINE

Profile	Picture	Cross section/dimensions	Product picture	Standard specifications
TOP 3567				<p>CC/CV 25.00 W/1.2 METER</p>

SHARP-LINE

SUSPENDED LINEAR LIGHT

PROFILE	SIZE [W X H]	LED PACKAGE	CRI	LM/LED	INPUT POWER	MAXIMUM WATT/M	APX. WEIGHT KG /M	COATING
TOP 3567	35.30 X 67	2835	70-85	26	CV-12/24 CC= 480 mA	28.8	00 KG	IP30




OPTIONS

DIFFUSER		CCT [K]		WATTS/M	LED/METER
SLF	N/A	K1	2700	14.4-28.8	60
PFM	PRESS FIT OPAL	K2	3000		84
PFF	N/A	K3	4000		120
PFC	N/A	K4	5000		96
SLR	N/A	K5	6500		
		K6	8000		



STANDARD SIZES:	600 MM	1200 MM 2400 MM	19.2/22/28.8	CUSTOM SIZE CHARGE	20% EXTRA	Applications: Suspended, surface, Retail, office, residential etc.
-----------------	--------	--------------------	--------------	-----------------------	-----------	--

ULTRA-LINE

Profile	Picture	Cross section/dimensions	Product picture	Standard specifications
TOP 5070 WITH BWF DIFFUSER				<p>CC 35.00 W/1.2 METER</p>

ULTRA-LINE

SUSPENDED LINEAR LIGHT

PROFILE	SIZE [W X H]	LED PACKAGE	CRI	LM/LED	INPUT POWER	MAXIMUM WATT/M	APX. WEIGHT KG /M	COATING
TOP 5070	54 X 70	3014/2835 [3SDCM]	70-85	24-31	350 mA/ 500 mA	35	00 KG	IP30




OPTIONS

DIFFUSER		CCT [K]		WATTS/M	LED/METER
SLF	N/A	K1	2700	30-35 W	192
PFM	PRESS FIT SATIN BWF	K2	3000		192
PFF	N/A	K3	4000		
PFC	N/A	K4	5000		
SLR	N/A	K5	6500		
		K6			



STANDARD SIZES:	300 MM 600 MM	1200 MM 2400 MM	ORDER SIZE MULTIPLE OF : 600 / 1200 / 2400	CUSTOM SIZE CHARGE	20% EXTRA	Applications: Suspended, surface commercial linear lighting for office, residence etc.
-----------------	------------------	--------------------	---	-----------------------	-----------	---

EX-LINE

Profile	Picture	Cross section/dimensions	Product picture	Standard specifications
TOP 5064				CC 35.00 W/1.2 METER

EX-LINE

SUSPENDED LINEAR LIGHT

PROFILE	SIZE [W X H]	LED PACKAGE	CRI	LM/LED	INPUT POWER	MAXIMUM WATT/M	APX. WEIGHT KG /M	COATING
TOP-5064	50 X 64	2016/2835	70-85	24-31	CC 1000 MA	30-35	00 KG	IP30

OPTIONS

DIFFUSER		CCT [K]		WATTS/M	LED/1.2 METER
SLF	N/A	K1	2700	30-35	180
PFM	PRESS FIT OPAL	K2	3000		
PFF	N/A	K3	4000		
PFC	N/A	K4	5000		
SLR	N/A	K5	6500		
		K6	-		



STANDARD SIZES:

300 MM	1200 MM
600 MM	2400 MM




ORDER SIZE MULTIPLE OF :
300 MM

CUSTOM SIZE
CHARGE

20% EXTRA

Applications: economical Suspended, surface commercial linear lighting for office, residence etc.

TRACK-LINE [3 IN 1 LIGHT]

Profile	Picture	Cross section/dimensions	Product picture	Standard specifications
CRISTA				<p>CC/CV 25.00 W/METER</p>

TRACK-LINE

SUSPENDED LINEAR LIGHT

PROFILE	SIZE [W X H]	LED PACKAGE	CRI	LM/LED	INPUT POWER	MAXIMUM WATT/M	APX. WEIGHT KG /M	COATING
CRISTA	28.60 X 53	2016/2835	80-90	24-31	CC= 350 mA CV = 24 V DC	30	00 KG	IP30

OPTIONS

DIFFUSER		CCT [K]		WATTS/M	LED/METER
SLF	N/A	K1	2700		
PFM	N/A	K2	3000		
PFF	PRESS FIT OPAL	K3	4000	60	
PFC	N/A	K4	5000	84	
SLR	N/A	K5	6500	120	
		K6	8000		



STANDARD SIZES:

500 MM
600 MM

1000 MM
1200 mm




14.4/19.2/28.8

CUSTOM SIZE
CHARGE

20% EXTRA

Applications: Retail, supermarkets, passage lighting, corridors, etc.

AQUALINA [TRIPROOF-OUTDOOR]

Profile	Picture	Cross section/dimensions	Product picture	Standard specifications
AQUAPRO				CC 60.00 W/1.2METER

AQUALINA [IP67]

SUSPENDED OUTDOOR LINEAR LIGHT

PROFILE	SIZE [W X H]	LED PACKAGE	CRI	LM/LED	INPUT POWER	MAXIMUM WATT/M	APX. WEIGHT KG /M	COATING
AQUAPRO	84.80 X 51.90	2835	80-85	24-26	CC= 1400 mA CV = 24 V DC	80	00 KG	IP65

OPTIONS




DIFFUSER		CCT [K]		WATTS/1.2M	LED/METER
SLF	N/A	K1	2700	60W	182
PFM	N/A	K2	3000		
PFF	PRESS FIT OPAL	K3	4000		
PFC	N/A	K4	5000		
SLR	N/A	K5	6500		
		K6	8000		



STANDARD SIZES:	600 MM	1200 mm	30/60	CUSTOM SIZE	N/A	Applications: Parking, basement, canopy, cold storage, ware house Sports complex etc.
-----------------	--------	---------	-------	-------------	-----	--

CORNER LINEAR LIGHTING

SPECTRA

Profile	Picture	Cross section/dimensions	Product picture	Standard specifications
SLIM 45				CV 6.72 W/METER

SPECTRA

CORNER LINEAR LIGHT

PROFILE	SIZE [W X H]	LED PACKAGE	CRI	LM/LED	INPUT POWER	MAXIMUM WATT/M	APX. WEIGHT KG /M	COATING
SLIM 45	8.20 X 7.50	2014/2835	70-85	9-12	CV = 12 V DC	6.72	00 KG	IP30




OPTIONS

DIFFUSER		CCT [K]		WATTS/M 4.8 to 6.72	LED/METER
SLF	N/A	K1	2700		
PFM	N/A	K2	3000		48
PFF	N/A	K3	4000		60
PFC	N/A	K4	5000		
SLR	N/A	K5	6500		
		K6	8000		



STANDARD SIZES:	500 MM	1000 MM 2000 MM	ORDER SIZE MULTIPLE OF : xx MM FOR 12 V xx MM FOR 24 V	CUSTOM SIZE CHARGE	20% EXTRA	Applications: under cabinet, kitchen, furniture etc.
-----------------	--------	--------------------	--	-----------------------	-----------	--




VERSAC

Profile	Picture	Cross section/dimensions	Product picture	Standard specifications
EDGE				<p>CV 14.4 W/METER</p>

VERSAC							SURFACE LINEAR LIGHT	
PROFILE	SIZE [W X H]	LED PACKAGE	CRI	LM/LED	INPUT POWER	MAXIMUM WATT/M	APX. WEIGHT KG /M	COATING
EDGE	16.10 X 16.10	2835/3528/ 3014/2016/ 5630/5730	70-85	9-31	CV = 12 V DC CV = 24 V DC	19.2	00 KG	IP30/IP65
OPTIONS								
DIFFUSER		CCT [K]		WATTS/M	LED/METER			
SLF	N/A	K1	2700	4.8 to 19.2	30/2835			
PFM	PRESS FIT OPAL	K2	3000		48/2835			
PFF	PRESS FIT FROSTED	K3	4000		60/2835/2016/ 3014			
PFC	PRESS FIT CLEAR	K4	5000		72/3014			
SLR	-	K5	6500		84/2016/3528			
		K6	TUNEABLE CCT / RGBA/W		120/2016/2835 240/3528			
STANDARD SIZES:		500 MM	1000 MM 2000 MM	4.8/7.2/11.52/14.4/19.2	CUSTOM SIZE CHARGE	20% EXTRA	Applications: cove lighting, under cabinet, kitchen, furniture etc.	



ARISTRO

Profile	Picture	Cross section/dimensions	Product picture	Standard specifications
ANGULAR 45				<p>CV 19.2 W/METER</p>

ARISTRO

CORNER LINEAR LIGHT

PROFILE	SIZE [W X H]	LED PACKAGE	CRI	LM/LED	INPUT POWER	MAXIMUM WATT/M	APX. WEIGHT KG /M	COATING
ANGULAR 45	26.13 X 18.50	2835/3014/2016/ 5630/5730	70-85	9-31	CV = 12 V DC CV = 24 V DC	19.2	00 KG	IP30/IP65




OPTIONS

DIFFUSER		CCT [K]		WATTS/M	LED/METER
SLF	N/A	K1	2700	4.8 to 19.2	30
PFM	PRESS FIT OPAL	K2	3000		48
PFF	PRESS FIT FROSTED	K3	4000		60
PFC	PRESS FIT CLEAR	K4	5000		72
SLR	SLIDE OPAL [NO DOT] EXTRA COST	K5	6500		84
		K6	R/G/B/A RGB/RGBW/ TUNEABLE		120 240




STANDARD SIZES:	500 MM	1000 MM 2000 MM	4.8/7.2/11.52/14.4/19.2	CUSTOM SIZE CHARGE	20% EXTRA	Applications: cove, under cabinet, kitchen, furniture and general purpose corners, etc.
-----------------	--------	--------------------	-------------------------	--------------------	-----------	--

ARCLIT




Profile	Picture	Cross section/dimensions	Product picture	Standard specifications
ARC				<p>CV 19.2 W/METER</p>

ARCLIT							CORNER LINEAR LIGHT	
PROFILE	SIZE [W X H]	LED PACKAGE	CRI	LM/LED	INPUT POWER	MAXIMUM WATT/M	APX. WEIGHT KG /M	COATING
ARC	29 X 16	2835/3014/2016/ 3528	70-85	9-31	CV = 12 V DC CV = 24 V DC	19.2	00 KG	IP30/IP65
OPTIONS								
DIFFUSER		CCT [K]		WATTS/M	LED/METER			
SLF	N/A	K1	2700	4.8 to 19.2	60			
PFM	PRESS FIT OPAL	K2	3000		84			
PFF	PRESS FIT FROSTED	K3	4000		120			
PFC	PRESS FIT CLEAR	K4	5000		240			
SLR	SLIDE OPAL [NO DOT] EXTRA COST	K5	6500		240			
		K6	R/G/B/A RGB/RGBW/ TUNEABLE		240			
STANDARD SIZES:		500 MM	1000 MM 2000 MM	4.8/7.2/11.52/14.4/19.2	CUSTOM SIZE CHARGE	20% EXTRA	Applications: under cabinet, kitchen, furniture etc.	



DISPLAY LINEAR LIGHTING

CABI-LITE

Profile	Picture	Cross section/dimensions	Product picture	Standard specifications
CABI-LITE				CV 19.2 W/METER

CABI-LITE

DISPLAY LINEAR LIGHT

PROFILE	SIZE [W X H]	LED PACKAGE	CRI	LM/LED	INPUT POWER	MAXIMUM WATT/M	APX. WEIGHT KG /M	COATING
CABI-LITE	15.74 X 15.81	2016/3014	70-85	24-31	CV = 12 V DC CV = 24 V DC	19.2	00 KG	IP30/IP65




OPTIONS

DIFFUSER		CCT [K]		WATTS/M	LED/METER
SLF	N/A	K1	2700	4.8 to 19.2	
PFM	PRESS FIT OPAL	K2	3000		48
PFF	N/A	K3	4000		60
PFC	N/A	K4	5000		
SLR	N/A	K5	6500		
		K6	8000		



STANDARD SIZES:	500 MM	1000 MM 2000 MM	11.52/14.4/19.2	CUSTOM SIZE CHARGE	20% EXTRA	Applications: Specialised DISPLAY COUNTER LIGHT
-----------------	--------	--------------------	-----------------	-----------------------	-----------	---

CABICA

Profile	Picture	Cross section/dimensions	Product picture	Standard specifications
CABEX				<p>CV 14.4 W/METER</p>

CABICA

DISPLAY LINEAR LIGHT

PROFILE	SIZE [W X H]	LED PACKAGE	CRI	LM/LED	INPUT POWER	MAXIMUM WATT/M	APX. WEIGHT KG /M	COATING
CABEX	17.80 X 15.80	2016	80-85	26	CV = 12 V DC	14.4	00 KG	IP30/IP65




OPTIONS

DIFFUSER		CCT [K]		WATTS/M	LED/METER	
SLF	N/A	K1	2700			4.8 to 14.4
PFM	PRESS FIT OPAL	K2	3000			
PFF	N/A	K3	4000			
PFC	N/A	K4	5000			
SLR	N/A	K5	6500			
		K6	8000			



STANDARD SIZES:	500 MM	1000 MM 2000 MM	7.2/11.52/14.4	CUSTOM SIZE CHARGE	20% EXTRA	Applications: Specialised DISPLAY COUNTER LIGHT WITH DIFFERENT LENSES
-----------------	--------	--------------------	----------------	-----------------------	-----------	--

CAROLUX

Profile	Picture	Cross section/dimensions	Product picture	Standard specifications
CARONA				CV 9.6 W/METER

CAROLUX

CORNER LINEAR LIGHT

PROFILE	SIZE [W X H]	LED PACKAGE	CRI	LM/LED	INPUT POWER	MAXIMUM WATT/M	APX. WEIGHT KG /M	COATING
CARONA	15.81 X 12.03	2835/3014/2016/	70-85	24-31	CV = 12 V DC CV = 24 V DC	9.6	00 KG	IP30/IP65




OPTIONS

DIFFUSER		CCT [K]		WATTS/M	LED/METER
SLF	FROSTED	K1	2700	4.8 to 9.6	
PFM	N/A	K2	3000		48
PFF	N/A	K3	4000		60
PFC	N/A	K4	5000		84
SLR	N/A	K5	6500		
		K6	8000		



STANDARD SIZES:	500 MM	1000 MM 2000 MM	7.2/9.6	CUSTOM SIZE CHARGE	20% EXTRA	Applications: under cabinet, kitchen, furniture etc.
-----------------	--------	--------------------	---------	-----------------------	-----------	---

ORIO

Profile	Picture	Cross section/dimensions	Product picture	Standard specifications
ORIEL				CV 14.4 W/METER

ORIO

DISPLAY LINEAR LIGHT

PROFILE	SIZE [W X H]	LED PACKAGE	CRI	LM/LED	INPUT POWER	MAXIMUM WATT/M	APX. WEIGHT KG /M	COATING
ORIEL	22.60 X 13.10	2016 OSRAM LED	70-85	26	CV = 12 V DC CV = 24 V DC	19.2	00 KG	IP30




OPTIONS

LENS		CCT [K]		WATTS/M	LED/METER
Lens	25 degree	K1	2700	4.8 to 19.2	
PFM	N/A	K2	3000		
PFF	N/A	K3	4000		60/2016/2835
PFC	N/A	K4	5000		84/2016
SLR	N/A	K5	6500		
		K6			



STANDARD SIZES:	500 MM	1000 MM 2000 MM	7.2/11.52/14.4/19.2	CUSTOM SIZE CHARGE	20% EXTRA	Applications: NARROW BEAM under cabinet, display etc.
-----------------	--------	--------------------	---------------------	-----------------------	-----------	---

G-LUX

Profile	Picture	Cross section/dimensions	Product picture	Standard specifications
GLASSET				CV 14.4 W/METER

G-LUX

GLASS LINEAR LIGHT

PROFILE	SIZE [W X H]	LED PACKAGE	CRI	LM/LED	INPUT POWER	MAXIMUM WATT/M	APX. WEIGHT KG /M	COATING
GLASSET	17.70 X 24.30	2016/2835	70-85	26	CV = 12 V DC	20	00 KG	IP30

OPTIONS




DIFFUSER		CCT [K]		WATTS/M	LED/METER
SLF	N/A	K1	2700	4.8 to 14.4	30
PFM	N/A	K2	3000		48
PFF	N/A	K3	4000		
PFC	N/A	K4	5000		
SLR	N/A	K5	6500		
		K6	8000		



STANDARD SIZES:	500 MM	1000 MM 2000 MM	11.52/14.4	CUSTOM SIZE CHARGE	20% EXTRA	Applications: Glass edge shelves lighting
-----------------	--------	--------------------	------------	--------------------	-----------	---

WARDROBE LINEAR LIGHTING

GRACE-LITE

Profile	Picture	Cross section/dimensions	Product picture	Standard specifications
GRACE				CV 11.52 W/METER

GRACE-LITE

WARDROBE LIGHT

PROFILE	SIZE [W X H]	LED PACKAGE	CRI	LM/LED	INPUT POWER	MAXIMUM WATT/M	APX. WEIGHT KG /M	COATING
GRACE	15 X 29	2016 [OSRAM]	85	26	CV = 12 V DC	14.4	00 KG	IP30

OPTIONS

DIFFUSER		CCT [K]		WATTS/M	LED/METER
SLF	FROSTED	K1	2700	4.8 to 14.4	48/2016
PFM	N/A	K2	3000		60/2016
PFF	N/A	K3	4000		
PFC	N/A	K4	5000		
SLR	N/A	K5	6500		
		K6	-		



STANDARD SIZES:

CUSTOM SIZES
ACCEPTED

11.52/14.4



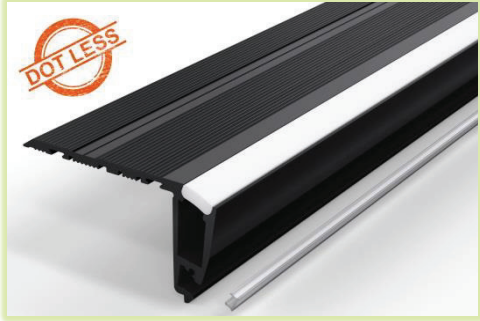
CUSTOM SIZE
CHARGE

20% EXTRA

Applications: Specialised wardrobe lighting applications

STAIRCASE LINEAR LIGHTING

STEPON

Profile	Picture	Cross section/dimensions	Product picture	Standard specifications
FOOTER				<p>CV 11.52 W/METER</p>


STEPON

STAIRCASE LIGHT

PROFILE	SIZE [W X H]	LED PACKAGE	CRI	LM/LED	INPUT POWER	MAXIMUM WATT/M	APX. WEIGHT KG /M	COATING
FOOTER	81.40 X 42.50	3528/2835	70-85	9-26	CV = 12 V DC	30	00 KG	IP30/IP65

OPTIONS

DIFFUSERS		CCT [K]		WATTS/M	LED/METER
TOP	WHILTE ELASTOMER	K1	2700		
BOTTOM	PC PRESS FIT OPAL	K2	3000	48/2835	
		K3	4000	72/3528	
		K4	5000	84/3528	
		K5	6500		
		K6	RED BLUE GREEN AMBER		

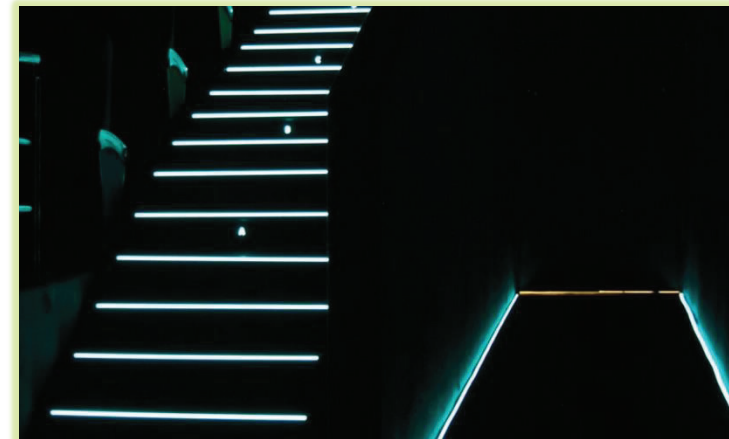

STANDARD SIZES:

500 MM

1000 MM
2000 MM

4.8UP / 4.8 DOWN optional

CUSTOM SIZE
CHARGE

20% EXTRA

Applications: staircases, multiplex, auditoriums, premium residences

THANK YOU!

For more details and support please contact:



583,narayan Peth, Jaldhara Society,pune-411030.


Phone : 020-24455293/24461156/24492424/24486306

Laxmikant -9822332340 / Rahul -9881245432 / Gajanan -7350011609

Email : sales@rajelectricals.co.in / lighting@rajelectricals.co.in

Company GST No: 27AAXFR4538H1ZJ

TRIMLESS LED PROFILES



digiopto

TECHNOLOGIES PVT. LTD.



PROFESSIONAL RECESSED PLASTER IN ALUMINIUM PROFILE LIGHTING FOR OFFICE AND RESIDENCES BY DIGILED

Introduction:

Dry wall profile led lighting is Ideal for ambient and primary lighting. Create amazing jaw dropping lighting in your space with this plaster in to Gypsum board profile. One or two lines of our strips in profile creates up to 1000-2000 lumens per meter depending on requirement with the milky diffuser and eliminates any spotting or shadowing for a seamless light output.

Sizes: Available in 1m and 2m lengths

Various color temperatures and other combinations below:

- White/ Warm white = 2200k, 2700k, 3000k, 4000k, 5000k, 6500k, 8000k,
- RGB, RGBW, RGBWW
- Color Tunable, warm tunable, wide range 2200k to 8000k tunable.

Applications:

Designed to be plastered into ceiling of walls, the profile will leave no visible trim. Ideal for mounting in Dry wall and Plaster board.

Incredible finish for high end installations is possible.

Skirting board led lights: - Use our DigiLED strip lights to create beautiful courtesy lighting

Drywall led lighting: - Use our DigiLED Strips in our range of led drywall channel to create awesome flush mount linear wall feature lighting

- Drywall Corner beads
- Wall reveals
- Recessed lighting
- Plaster-in LED system

The DRYWALL ALUMINIUM PROFILES are suitable for a seamless installation as wall or ceiling lighting in drywall installations.

Horizontal or vertical installations

Seamless integration possible

Four different shapes of high quality plastic covers are available:

Flat, oval, round and square, rectangle etc.

Each of the four shapes are available in crystal clear, frost (semitransparent) and milky frost (opal). The flat cover (FLAT) is also supplied in black (translucent effect).

Profile advantage:

The LED aluminum channels protect the LED Strip lighting and also act as a heat sink, extending the lifespan of the flexible LED's. Common terms used in the industry for these profiles include 'mud in profiles' and 'gypsum led profiles'.

Why DigiLED profiles?

DigiLED aluminium profiles are the perfect addition to the DigiLED Rigid STRIPS. The Rigid STRIPS can be glued into the profile. The aluminum profiles are in anodized aluminium available. The profile can simply be sawn to any required length or ordered in the required custom length. Different versions of Aluminium profiles and different shapes of plastic covers are available. In addition we offer a wide range of accessories.

Supply:

We stock these profiles at our warehouse in Vasai, Maharashtra and can ship to all parts of the India and abroad.

Technical Support:

DigiLED being into LED linear lighting industry for more than 10 year, can offer you excellent support on technical issues like Planning, wiring, basic installations, power management, technical drawings, fault finding. Our technical team is very well expertise into solving on site issues and will guide you with best support and directions towards the successful installations.




DRYWALL PROFILES



COBRA




ARIZON



ARCO



TEXAS

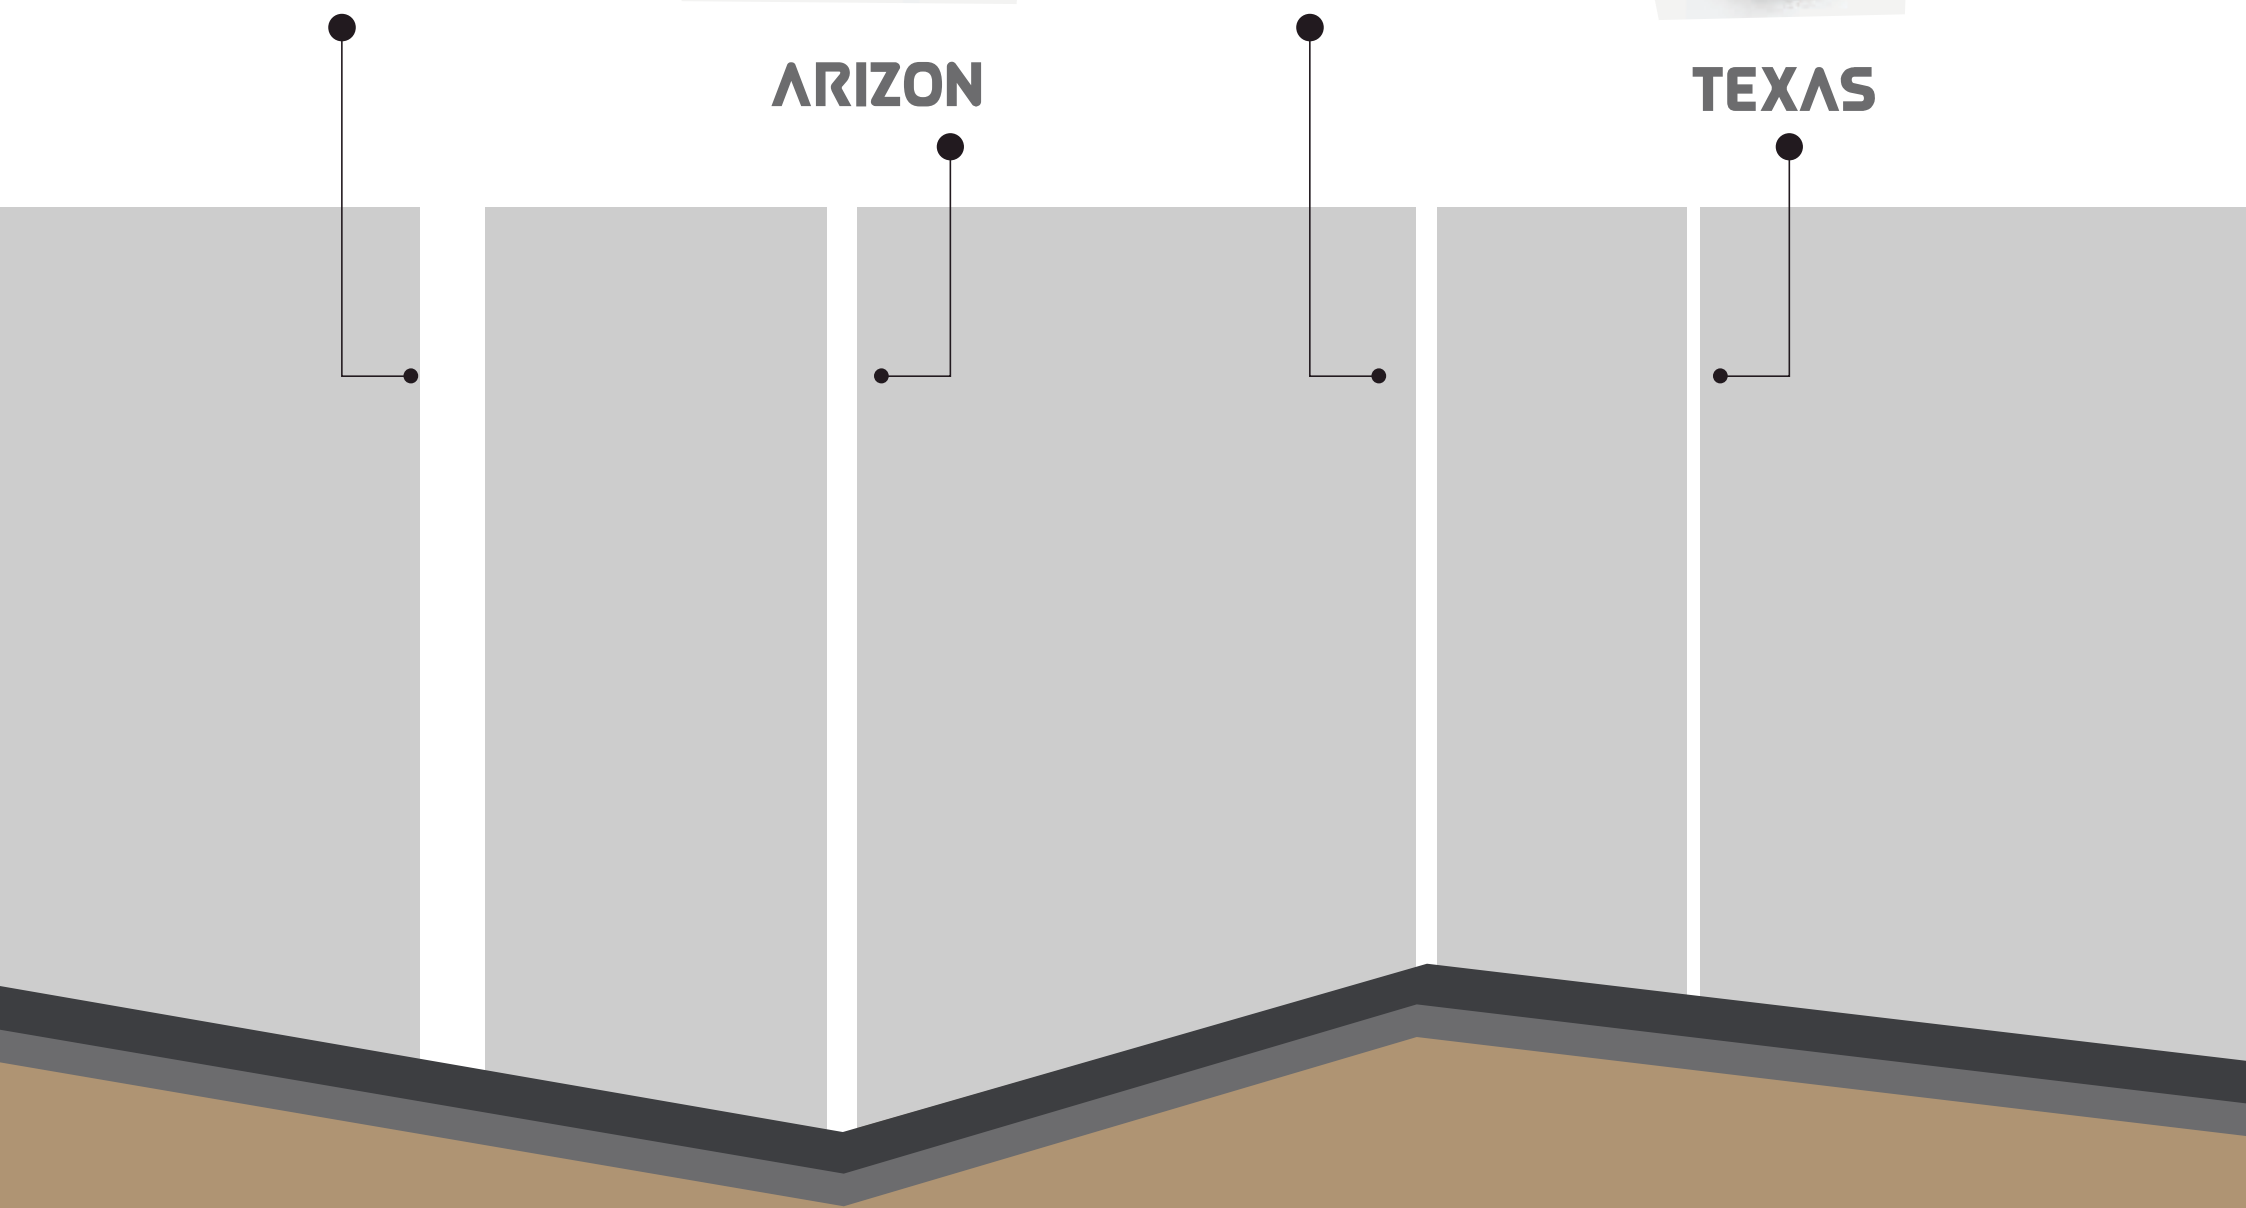

CONTENT

4 PYTHON

5 ARCO

6 ARIZON

7 BOA

9 TEXAS

10 VIPERS

11 COBRA

12 GREEN

14 CASPIAN


15 BATS

16 BIRD


17 DOME

18 DOPE



PYTHON

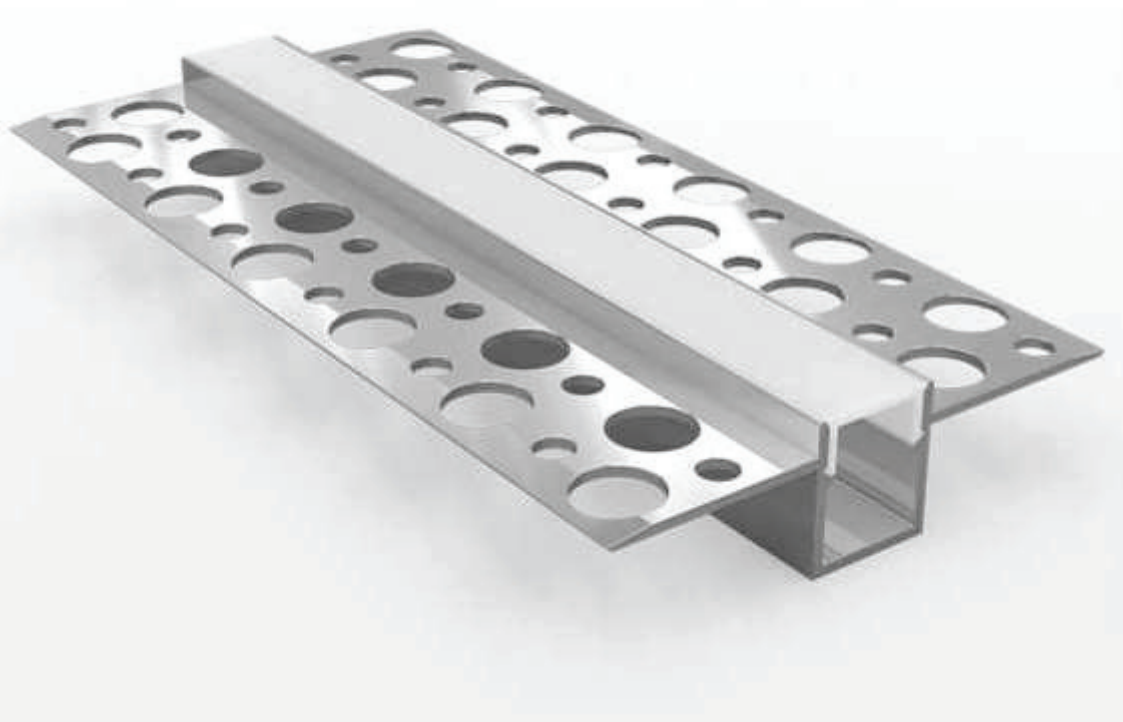


- TRIMLESS PASTER-IN FLAT LIGHT
- Flat LED aluminum profile channel for creating a recessed light effect in a plaster wall.
- 1 meter and 2 Meter length
- Suitable for standard strip up to 8/ 10 mm width
- 14mm overall depth, 10mm to flange
- 13 mm recess width
- 53 mm wide flange
- Please also see our range of Led strips and our made to measure service

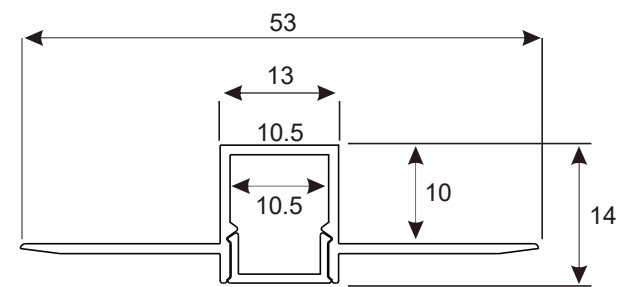

MODE NAME	: PYTHON
ALUMINIUM HEAT SINK	: ANODISED 6063-T5
COVE	: PC MILKY WHITE
FLAMABILITY	: V2 FIRE RATING FOR PC COVER
END CAP	: PP
HEAT TRANSMISSION PROPERTIES	: AL SPECIFIC HEAT IS 0.88X 10J/(kgx0C)
OPERATING TEMPERATURE	: -30° C ~ + 60° C (22° F~ 140° F)
PCB (MM)	: 8 / 10
SIZE	: 1 M / 2 M / CUSTOM
WATTS PER METER	: 9.6-14.4
CCT [K] AND COLORS	: 2300/2700/3000/3500/4000/5000/5700/6500/ 8000 TUNABLE/RGB/ RGBWW/R,G,B,A,P
CRI	: 80 ~85 90 + ON DEMAND
LED PER METER	: 2835 PACKAGE 120 LED / METER

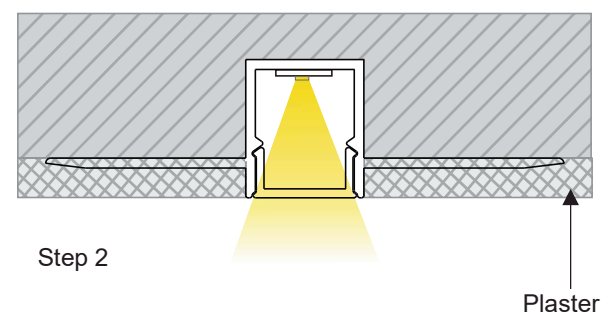
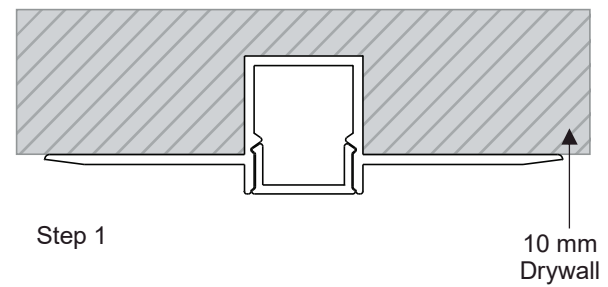


ARCO

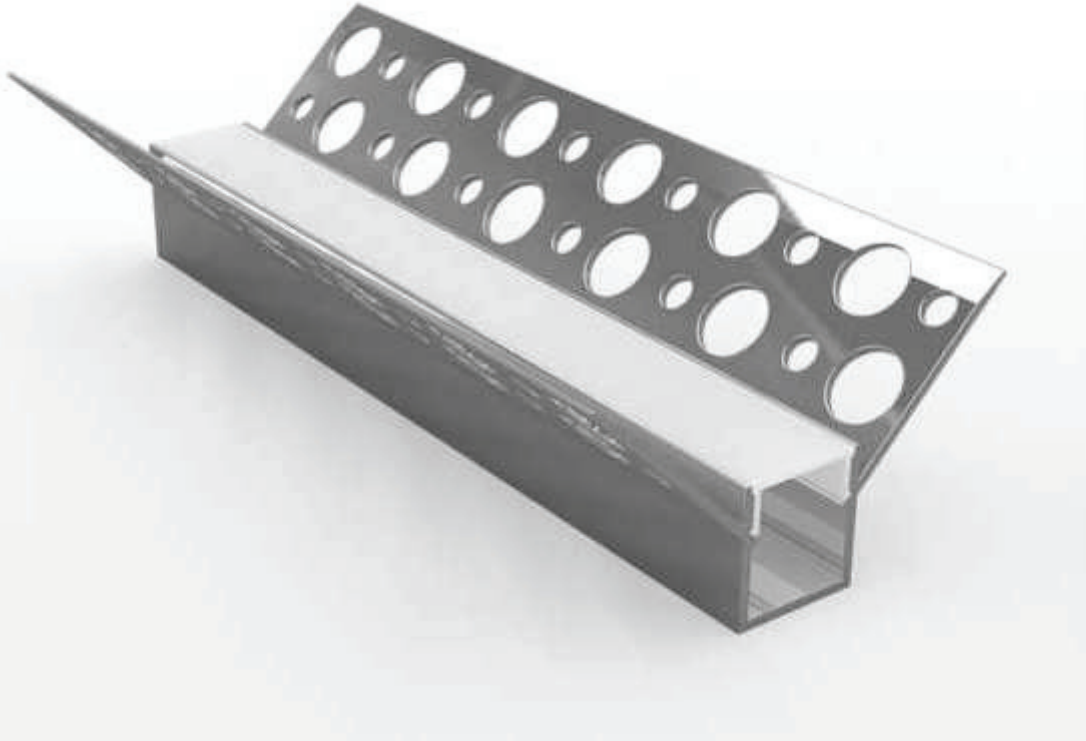


- TRIMLESS PASTER-IN INTERNAL CORNER LIGHT
- Flat LED aluminium profile channel for creating a recessed light effect in a plaster wall.
- 1 meter and 2 Meter length
- Suitable for standard strip up to 8/10 mm width
- 14 mm overall depth , 8.8mm to flange.
- 13 mm recess width
- 46 mm wide flange
- Please also see our range of Led strips and our made to measure service

MODE NAME	: PYTHON
ALUMINIUM HEAT SINK	: ANODISED 6063-T5
COVE	: PC MILKY WHITE
FLAMABILITY	: V2 FIRE RATING FOR PC COVER
END CAP	: PP
HEAT TRANSMISSION PROPERTIES	: AL SPECIFIC HEAT IS 0.88X 10J/(kgx0C)
OPERATING TEMPERATURE	: -30° C ~ + 60° C (22° F~ 140° F)
PCB (MM)	: 8 / 10
SIZE	: 1 M / 2 M / CUSTOM
WATTS PER METER	: 9.6-14.4
CCT [K] AND COLORS	: 2300/2700/3000/3500/4000/5000/5700/6500/8000 TUNABLE/RGB/ RGBWW/R,G,B,A,P
CRI	: 80 ~85 90 + ON DEMAND
LED PER METER	: 2835 PACKAGE 120 LED / METER

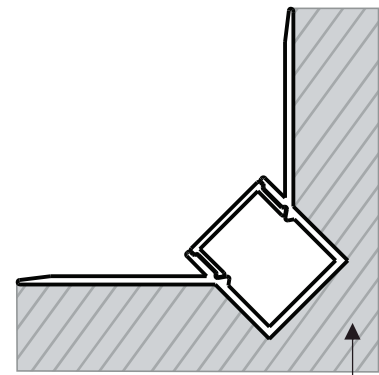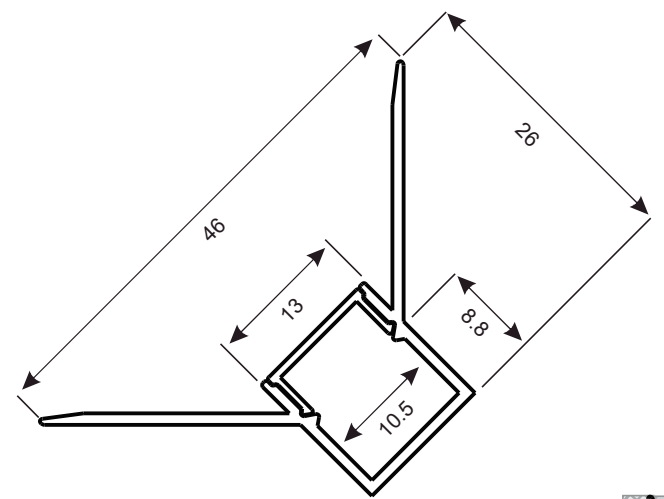

Step 1

10 mm Drywall

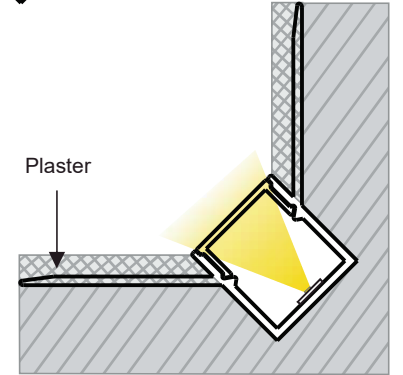

Step 2





ARIZON




- TRIMLESS PASTER-IN EXTERNAL CORNER LIGHT
- Flat LED aluminium profile channel for creating a recessed light effect in a plaster wall.
- 1 meter and 2 Meter length
- Suitable for standard strip up to 8/ 10 mm width
- 14 mm overall depth .6.8 mm to flange
- 13.1 mm recess width
- 50.6 mm wide flange
- Please also see our range of Led strips and our made to measure service

MODE NAME	: PYTHON
ALUMINIUM HEAT SINK	: ANODISED 6063-T5
COVE	: PC MILKY WHITE
FLAMABILITY	: V2 FIRE RATING FOR PC COVER
END CAP	: PP
HEAT TRANSMISSION PROPERTIES	: AL SPECIFIC HEAT IS 0.88X 10J/(kgx0C)
OPERATING TEMPERATURE	: -30° C ~ + 60° C (22° F~ 140° F)
PCB (MM)	: 8 / 10
SIZE	: 1 M / 2 M / CUSTOM
WATTS PER METER	: 9.6-14.4
CCT [K] AND COLORS	: 2300/2700/3000/3500/4000/5000/5700/6500/8000 TUNABLE/RGB/ RGBWW/R,G,B,A,P
CRI	: 80 -85 90 + ON DEMAND
LED PER METER	: 2835 PACKAGE 120 LED / METER


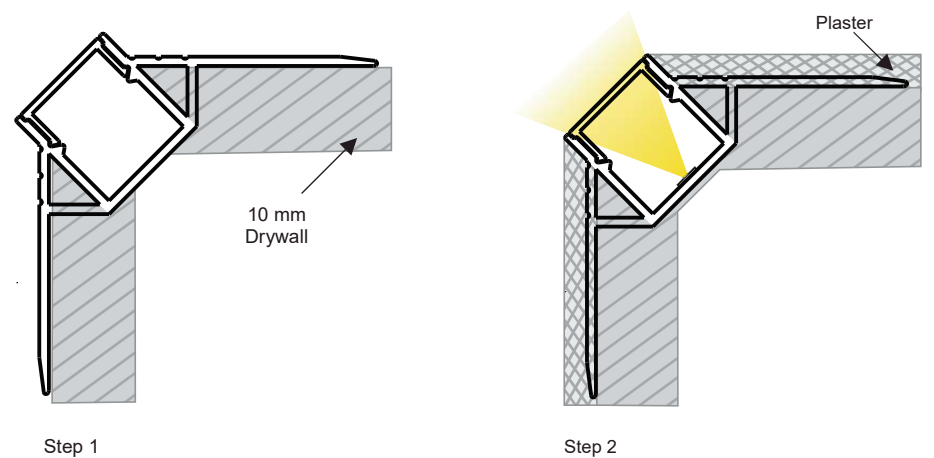
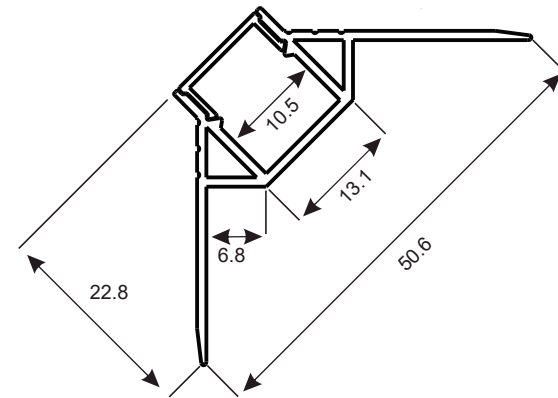


BOA

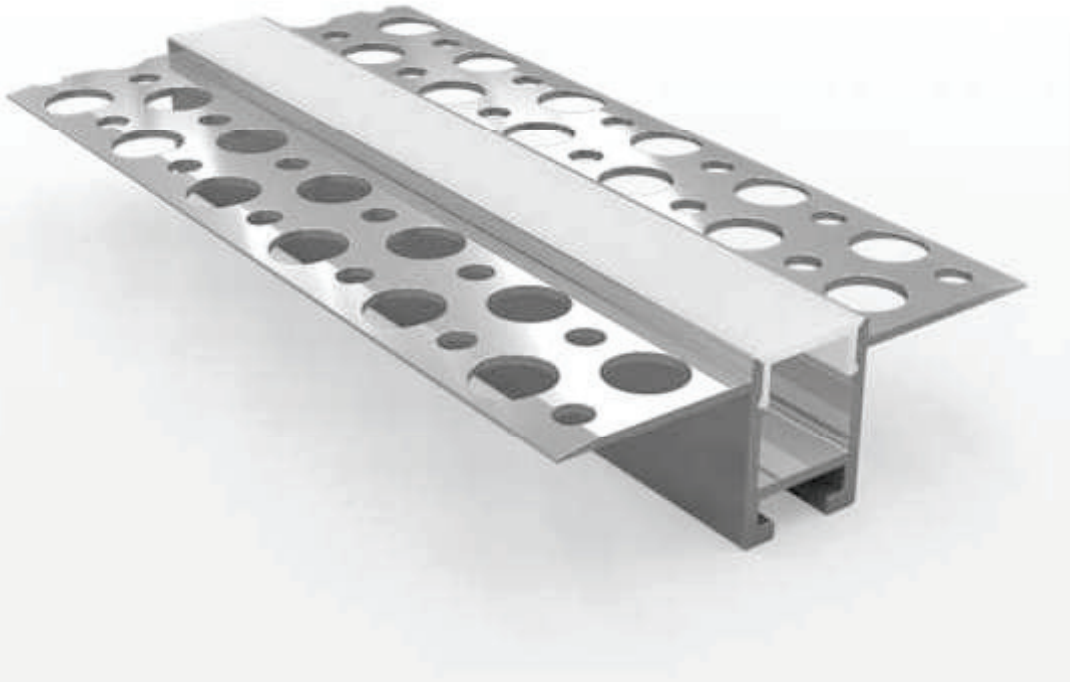


- TRIMLESS PASTER-IN FLAT LIGHT
- Flat LED aluminium profile channel for creating a recessed light effect in a plaster wall.
- 1 meter and 2 Meter length
- Suitable for standard strip up to 8/ 10 mm width
- 18.5 mm overall depth 15.5 mm to flange
- 13 mm recess width
- 53 mm wide flange
- Please also see our range of Led strips and our made to measure service

MODE NAME	: PYTHON
ALUMINIUM HEAT SINK	: ANODISED 6063-T5
COVE	: PC MILKY WHITE
FLAMABILITY	: V2 FIRE RATING FOR PC COVER
END CAP	: PP
HEAT TRANSMISSION PROPERTIES	: AL SPECIFIC HEAT IS 0.88X 10J/(kgx0C)
OPERATING TEMPARATURE	: -30° C ~ + 60° C (22° F~ 140° F)
PCB (MM)	: 8 / 10
SIZE	: 1 M / 2 M / CUSTOM
WATTS PER METER	: 9.6-14.4
CCT [K] AND COLORS	: 2300/2700/3000/3500/4000/5000/5700/6500/8000 TUNABLE/RGB/ RGBWW/R,G,B,A,P
CRI	: 80 ~85 90 + ON DEMAND
LED PER METER	: 2835 PACKAGE 120 LED / METER

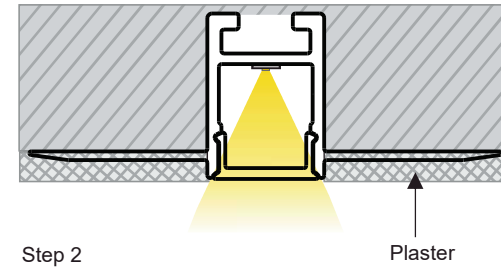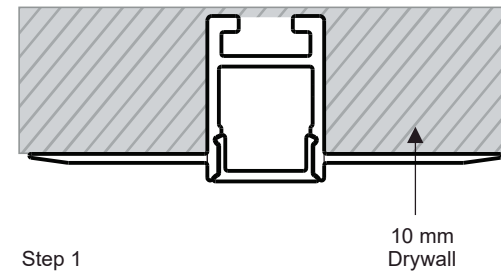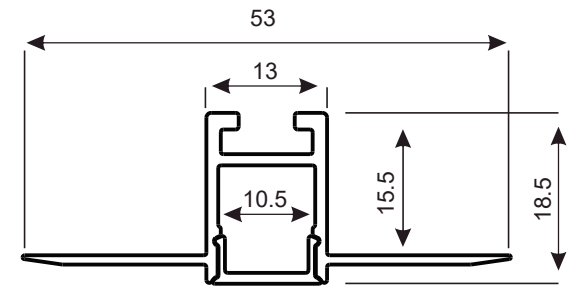







TEXAS

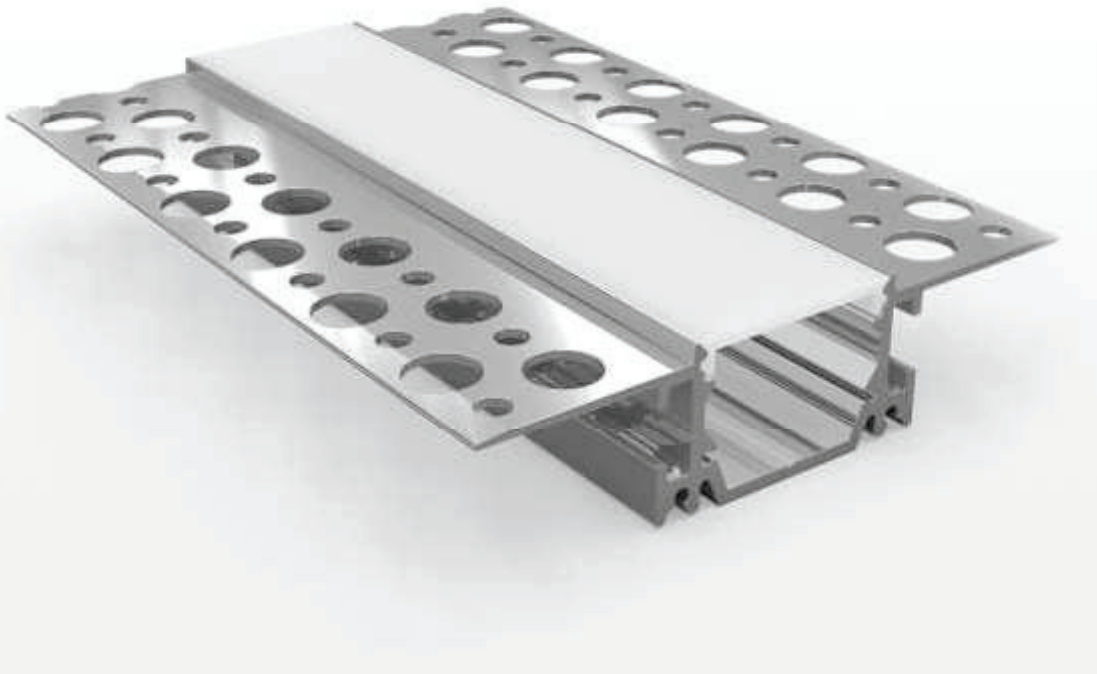


- TRIMLESS PASTER-IN FLAT LIGHT
- Flat LED aluminium profile channel for creating a recessed light effect in a plaster wall.
- 1 meter and 2 Meter length
- Suitable for standard strip up to 8/10/12 mm width
- 18.5 mm overall depth 15.5 mm to flange
- 33 mm recess width
- 73 mm wide flange
- Please also see our range of Led strips and our made to measure service




MODE NAME	: PYTHON
ALUMINIUM HEAT SINK	: ANODISED 6063-T5
COVE	: PC MILKY WHITE
FLAMABILITY	: V2 FIRE RATING FOR PC COVER
END CAP	: PP
HEAT TRANSMISSION PROPERTIES	: AL SPECIFIC HEAT IS 0.88X 10J/(kgx0C)
OPERATING TEMPERATURE	: -30° C ~ + 60° C (22° F~ 140° F)
PCB (MM)	: 8 / 10 / 12
SIZE	: 1 M / 2 M / CUSTOM
WATTS PER METER	: 9.6-19.2
CCT [K] AND COLORS	: 2300/2700/3000/3500/4000/5000/5700/6500/8000 TUNABLE/RGB/ RGBWW/R,G,B,A,P
CRI	: 80 -85 90 + ON DEMAND
LED PER METER	: 2835 PACKAGE 120 LED / METER

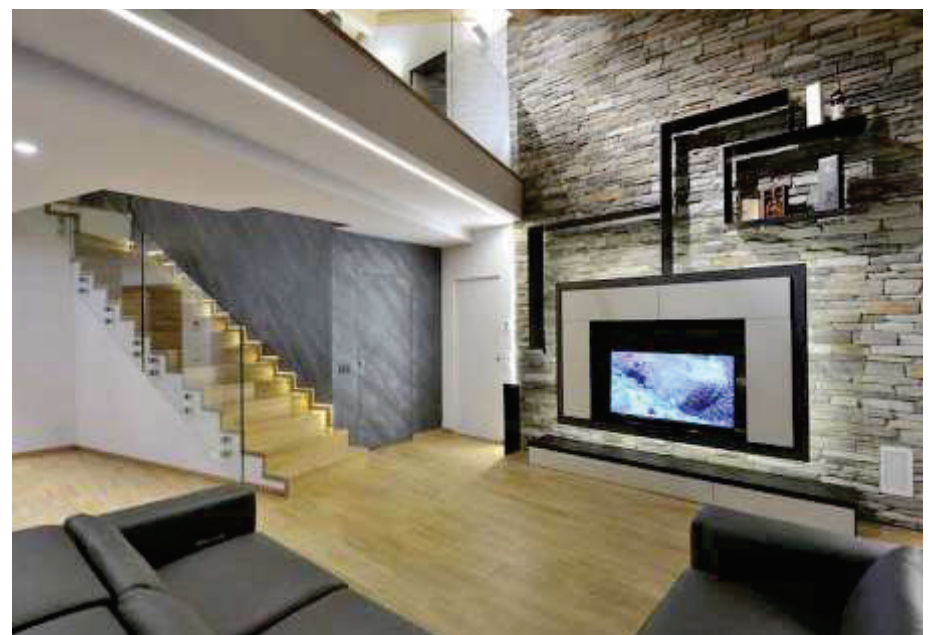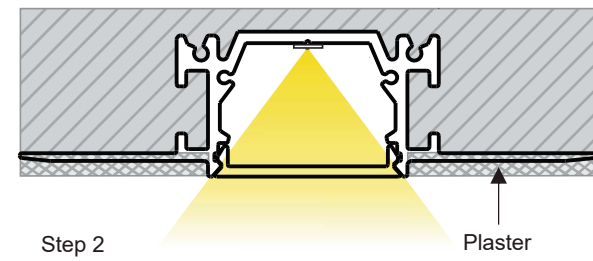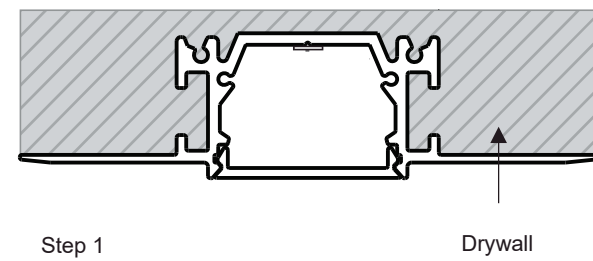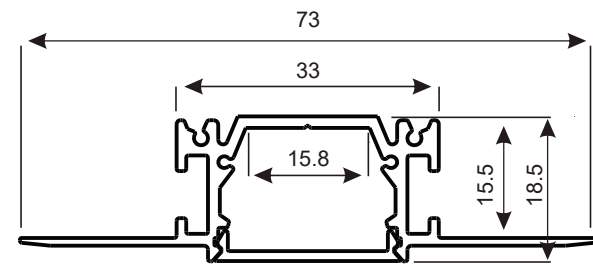

VIPERS

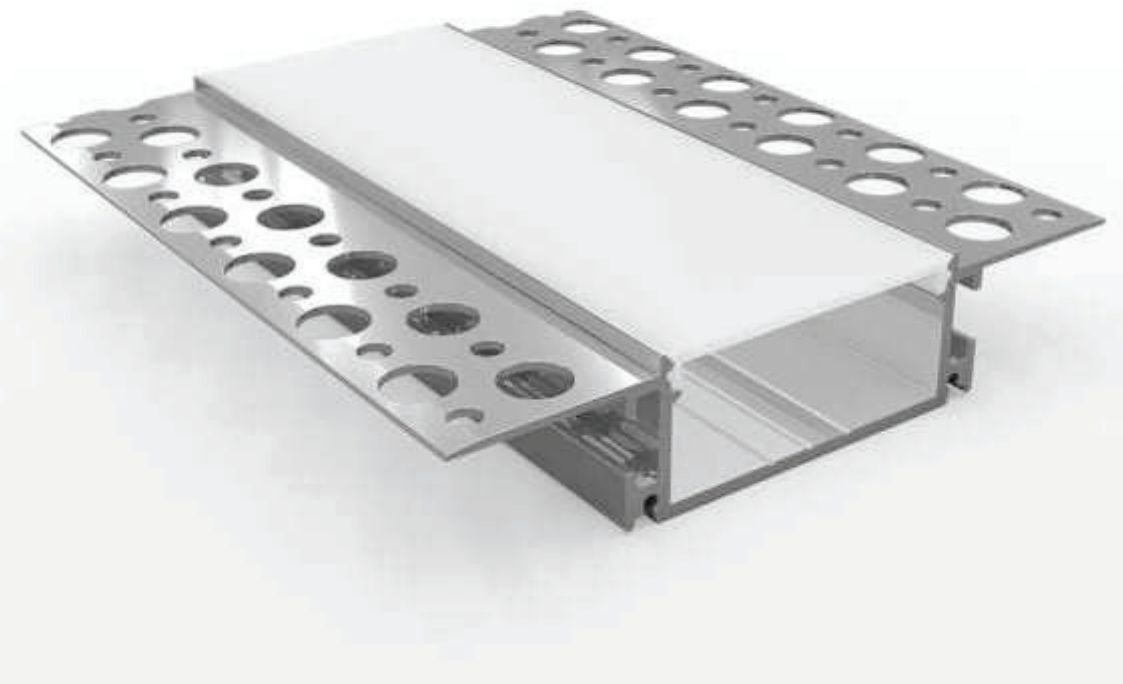


- TRIMLESS PASTER-IN FLAT LIGHT
- Flat LED aluminum profile channel for creating a recessed light effect in a plaster wall.
- 1 meter and 2 Meter length
- Suitable for standard strip up to 8/12/18/25 mm width
- 18.5mm overall depth 15.5mm to flange
- 48 mm recess width
- 88 mm wide flange
- Please also see our range of Led strips and our made to measure service.

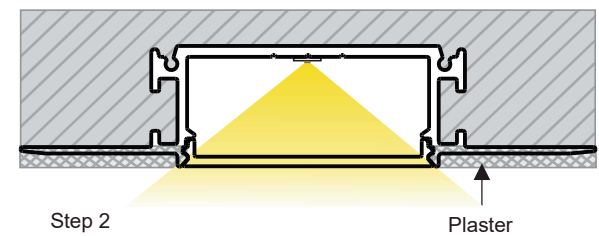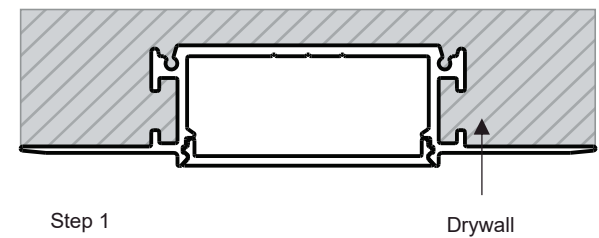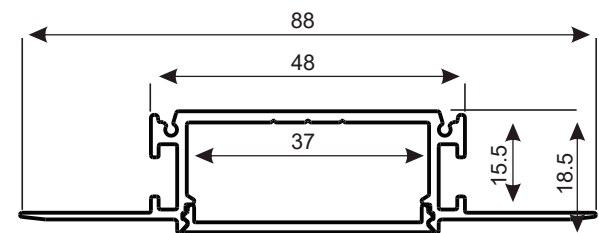

MODE NAME	: PYTHON
ALUMINIUM HEAT SINK	: ANODISED 6063-T5
COVE	: PC MILKY WHITE
FLAMABILITY	: V2 FIRE RATING FOR PC COVER
END CAP	: PP
HEAT TRANSMISSION PROPERTIES	: AL SPECIFIC HEAT IS 0.88X 10J/(kgx0C)
OPERATING TEMPARATURE	: -30° C ~ + 60° C (22° F~ 140° F)
PCB (MM)	: 8 / 10 / 12 / 18 / 25
SIZE	: 1 M / 2 M / CUSTOM
WATTS PER METER	: 9.6-22.0
CCT [K] AND COLORS	: 2300/2700/3000/3500/4000/5000/5700/6500/8000 TUNABLE/RGB/ RGBWW/R,G,B,A,P
CRI	: 80 ~85 90 + ON DEMAND
LED PER METER	: 2835 PACKAGE 120 LED / METER






COBRA

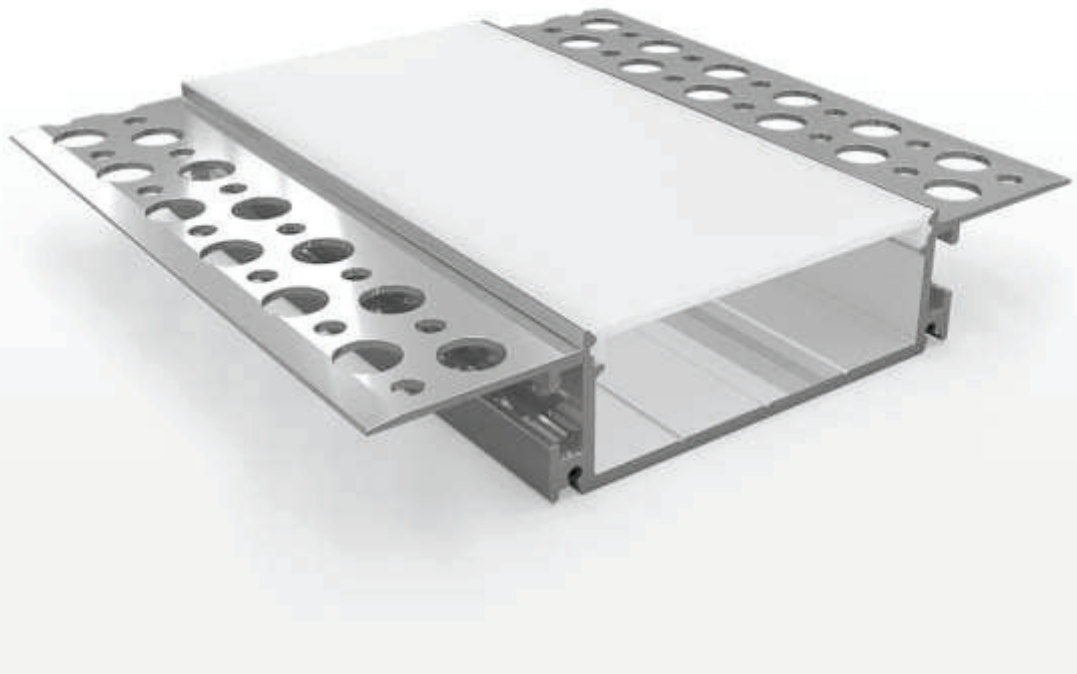


- TRIMLESS PASTER-IN FLAT LIGHT
- Flat LED aluminum profile channel for creating a recessed light effect in a plaster wall.
- 1 meter and 2 Meter length
- Suitable for standard strip up to 8/12/18/25 mm width
- 18.5 mm overall depth 15.5 mm to flange
- 64 mm recess width
- 104 mm wide flange
- Please also see our range of Led strips and our made to measure service.



MODE NAME	: PYTHON
ALUMINIUM HEAT SINK	: ANODISED 6063-T5
COVE	: PC MILKY WHITE
FLAMABILITY	: V2 FIRE RATING FOR PC COVER
END CAP	: PP
HEAT TRANSMISSION PROPERTIES	: AL SPECIFIC HEAT IS 0.88X 10J/(kgx0C)
OPERATING TEMPARATURE	: -30° C ~ + 60° C (22° F~ 140° F)
PCB (MM)	: 8 / 10 / 12 / 18 / 25
SIZE	: 1 M / 2 M / CUSTOM
WATTS PER METER	: 9.6-28.8
CCT [K] AND COLORS	: 2300/2700/3000/3500/4000/5000/5700/6500/8000 TUNABLE/RGB/ RGBWW/R,G,B,A,P
CRI	: 80 ~85 90 + ON DEMAND
LED PER METER	: 2835 PACKAGE 120 LED / METER

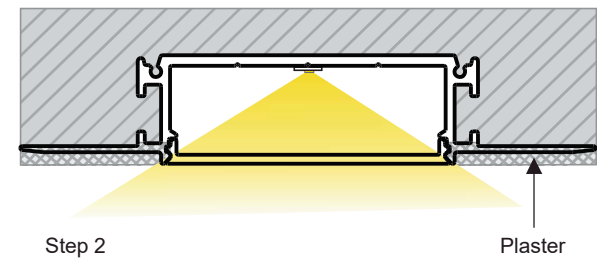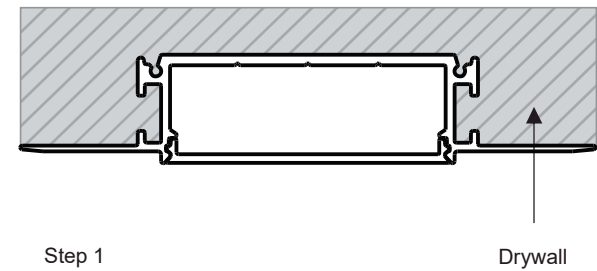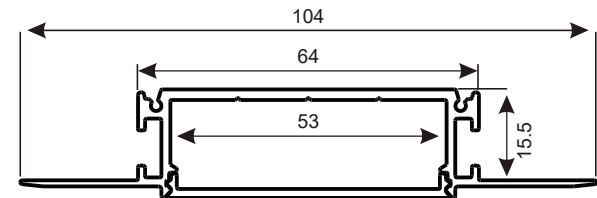


GREEN

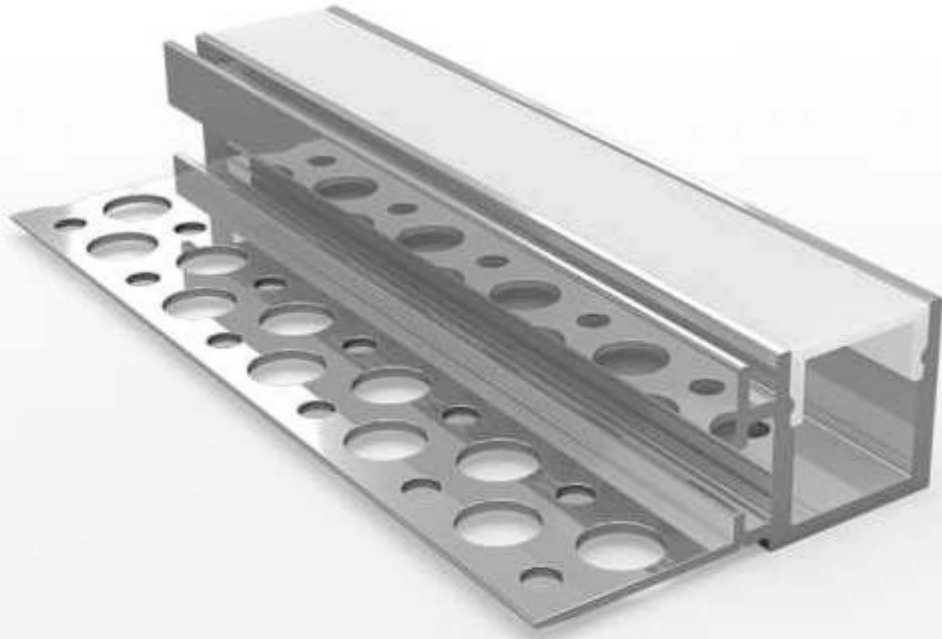

- TRIMLESS PASTER-IN FLAT LIGHT
- Flat LED aluminium profile channel for creating a recessed light effect in a plaster wall.
- 1 meter and 2 Meter length
- Suitable for standard strip up to 8/10/12 mm width
- 19 mm overall depth 16 mm to flange
- 22.5 mm recess width
- 42.5 mm wide flange
- Please also see our range of Led strips and our made to measure service.

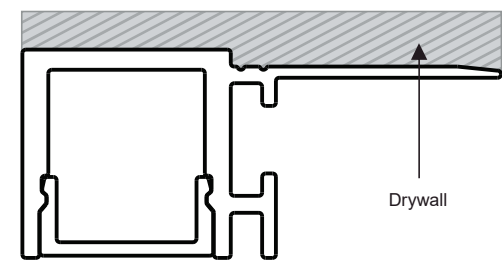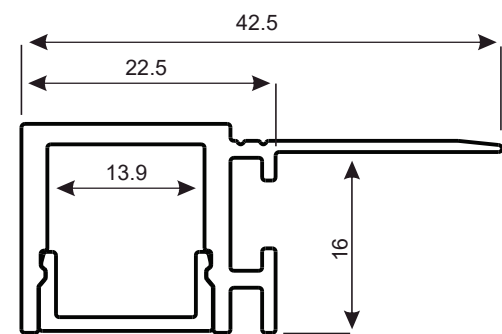

Step 1

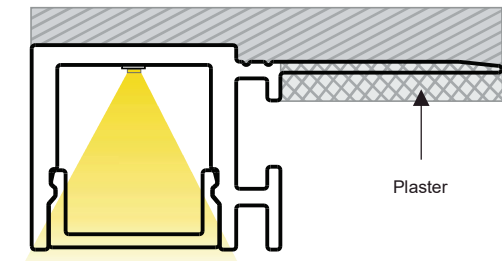


Step 2

MODE NAME	: PYTHON
ALUMINIUM HEAT SINK	: ANODISED 6063-T5
COVE	: PC MILKY WHITE
FLAMABILITY	: V2 FIRE RATING FOR PC COVER
END CAP	: PP
HEAT TRANSMISSION PROPERTIES	: AL SPECIFIC HEAT IS 0.88X 10J/(kgx0C)
OPERATING TEMPERATURE	: -30° C ~ + 60° C (22° F ~ 140° F)
PCB (MM)	: 8 / 10 / 12
SIZE	: 1 M / 2 M / CUSTOM
WATTS PER METER	: 9.6-14.4
CCT [K] AND COLORS	: 2300/2700/3000/3500/4000/5000/5700/6500/8000 TUNABLE/RGB/ RGBWW/R,G,B,A,P
CRI	: 80 ~85 90 + ON DEMAND
LED PER METER	: 2835 PACKAGE 120 LED / METER








CASPIAN

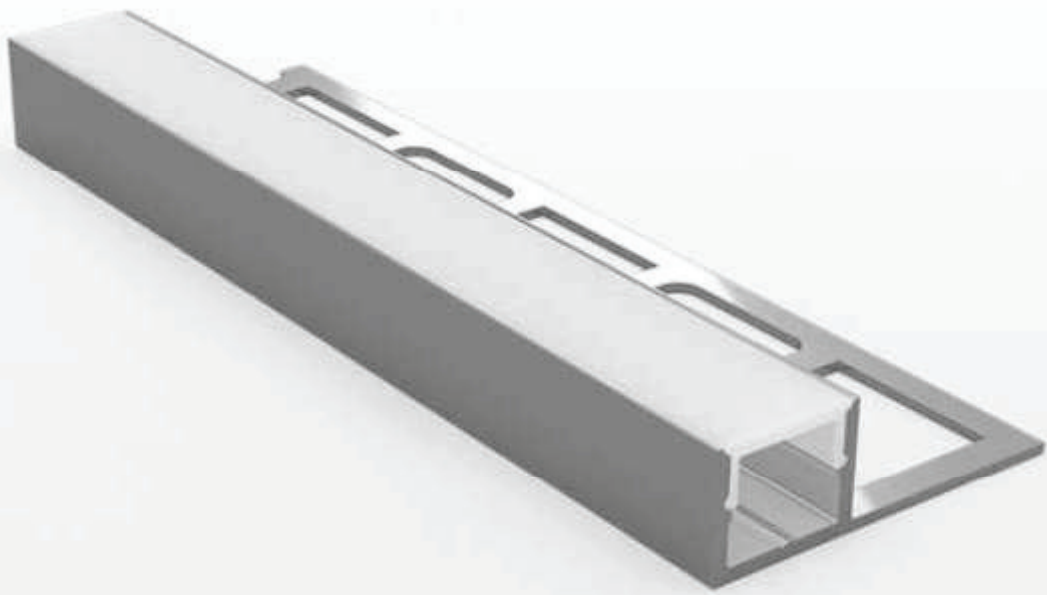

- TRIMLESS PASTER-IN TILE EDGE LIGHT
- Flat LED aluminium profile channel for creating a recessed light effect in a plaster wall.
- 1 meter and 2 Meter length
- Suitable for standard strip up to 8/10 mm width
- 11 mm overall depth 10mm to flange
- 13 mm recess width
- 33 mm wide flange
- Please also see our range of Led strips and our made to measure service.

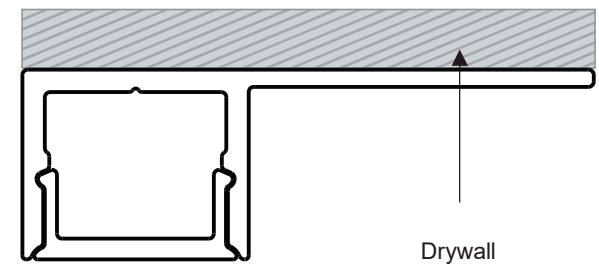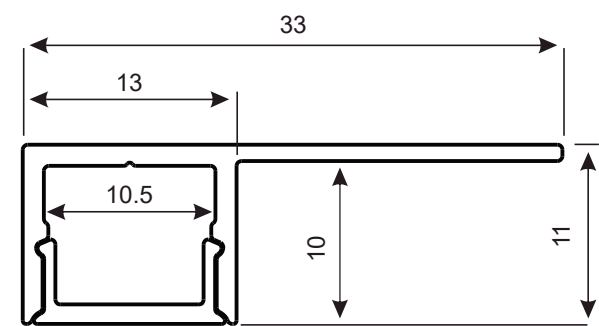


Step 1

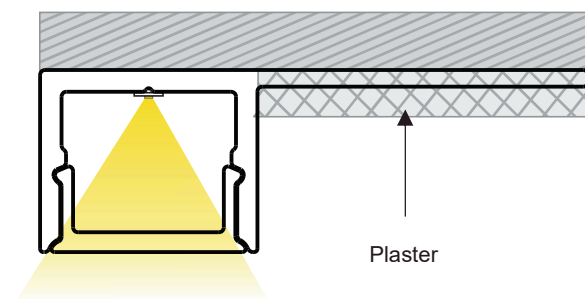


MODE NAME	: PYTHON
ALUMINIUM HEAT SINK	: ANODISED 6063-T5
COVE	: PC MILKY WHITE
FLAMABILITY	: V2 FIRE RATING FOR PC COVER
END CAP	: PP
HEAT TRANSMISSION PROPERTIES	: AL SPECIFIC HEAT IS 0.88X 10J/(kgx0C)
OPERATING TEMPERATURE	: -30° C ~ + 60° C (22° F~ 140° F)
PCB (MM)	: 8 / 10
SIZE	: 1 M / 2 M / CUSTOM
WATTS PER METER	: 9.6-14.4
CCT [K] AND COLORS	: 2300/2700/3000/3500/4000/5000/5700/6500/8000 TUNABLE/RGB/ RGBWW/R,G,B,A,P
CRI	: 80 ~85 90 + ON DEMAND
LED PER METER	: 2835 PACKAGE 120 LED / METER




BATS

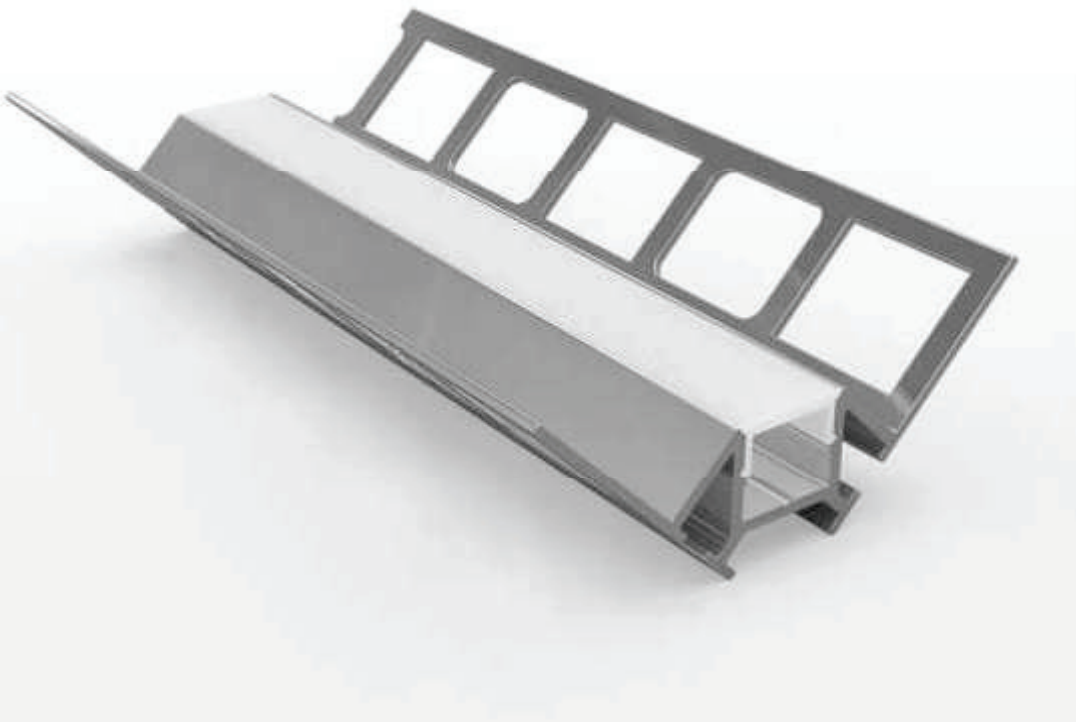


- TRIMLESS PASTER-IN TILED EXTERNAL CORNER LIGHT
- Flat LED aluminium profile channel for creating a recessed light effect in a plaster wall.
- 1 meter and 2 Meter length
- Suitable for standard strip up to 8/10 mm width
- 11mm overall depth 10mm to flange
- 11.5 mm recess width
- 56.3 mm wide flange
- Please also see our range of Led strips and our made to measure service.

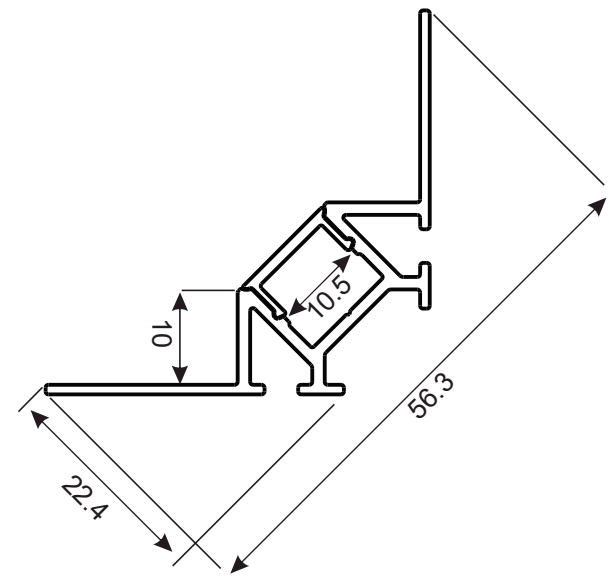

MODE NAME	: PYTHON
ALUMINIUM HEAT SINK	: ANODISED 6063-T5
COVE	: PC MILKY WHITE
FLAMABILITY	: V2 FIRE RATING FOR PC COVER
END CAP	: PP
HEAT TRANSMISSION PROPERTIES	: AL SPECIFIC HEAT IS 0.88X 10J/(kgx0C)
OPERATING TEMPERATURE	: -30° C ~ + 60° C (22° F~ 140° F)
PCB (MM)	: 8 / 10
SIZE	: 1 M / 2 M / CUSTOM
WATTS PER METER	: 9.6-14.4
CCT [K] AND COLORS	: 2300/2700/3000/3500/4000/5000/5700/6500/8000 TUNABLE/RGB/ RGBWW/R,G,B,A,P
CRI	: 80 -85 90 + ON DEMAND
LED PER METER	: 2835 PACKAGE 120 LED / METER

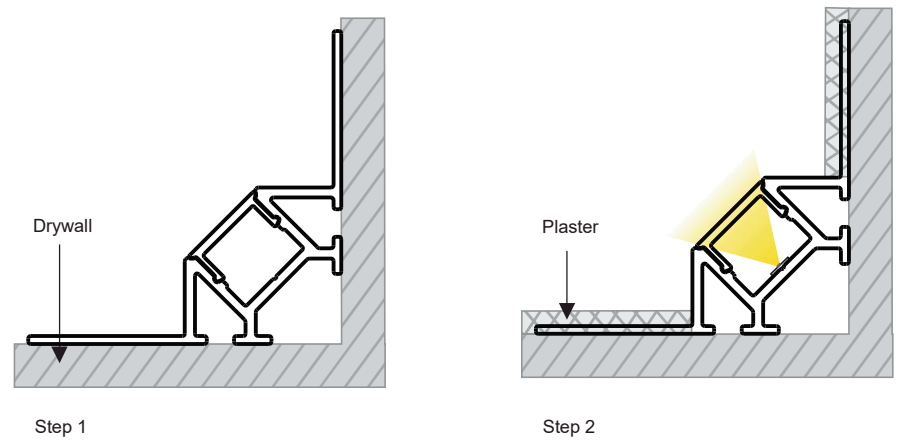


BIRD

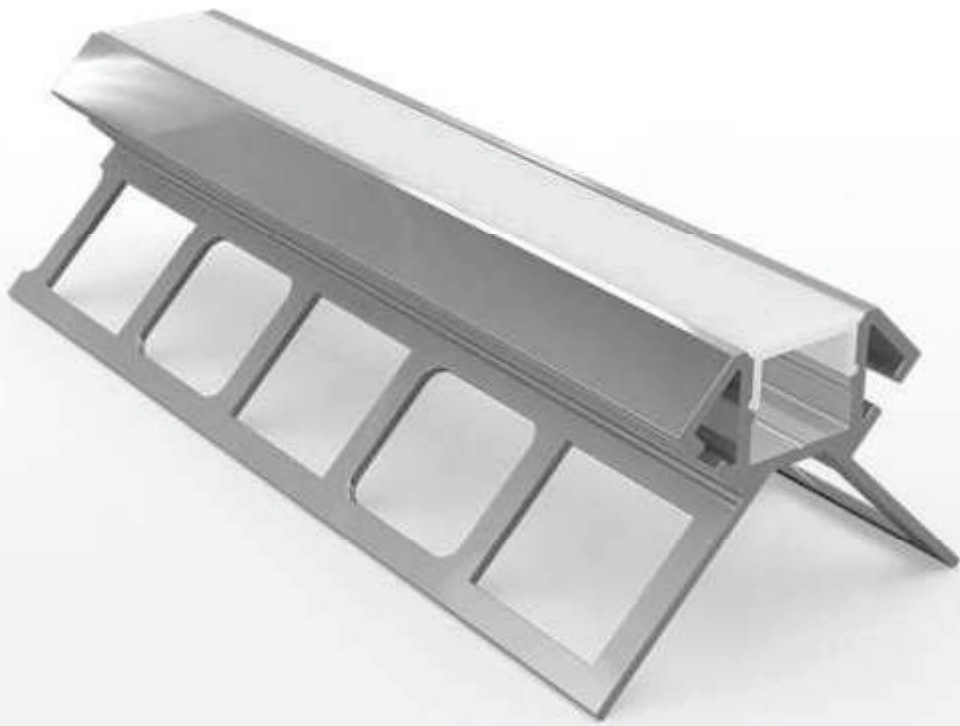


- TRIMLESS PASTER-IN TILED INTERNAL CORNER LIGHT
- Flat LED aluminum profile channel for creating a recessed light effect in a plaster wall.
- 1 meter and 2 Meter length
- Suitable for standard strip up to 8/ 10 mm width
- 11 mm overall depth 10mm to flange
- 11.5 mm recess width
- 39.4 mm wide flange
- Please also see our range of Led strips and our made to measure service.

MODE NAME	: PYTHON
ALUMINIUM HEAT SINK	: ANODISED 6063-T5
COVE	: PC MILKY WHITE
FLAMABILITY	: V2 FIRE RATING FOR PC COVER
END CAP	: PP
HEAT TRANSMISSION PROPERTIES	: AL SPECIFIC HEAT IS 0.88X 10J/(kgx0C)
OPERATING TEMPERATURE	: -30° C ~ + 60° C (22° F~ 140° F)
PCB (MM)	: 8 / 10
SIZE	: 1 M / 2 M / CUSTOM
WATTS PER METER	: 9.6-14.4
CCT [K] AND COLORS	: 2300/2700/3000/3500/4000/5000/5700/6500/8000 TUNABLE/RGB/ RGBWW/R,G,B,A,P
CRI	: 80 ~85 90 + ON DEMAND
LED PER METER	: 2835 PACKAGE 120 LED / METER



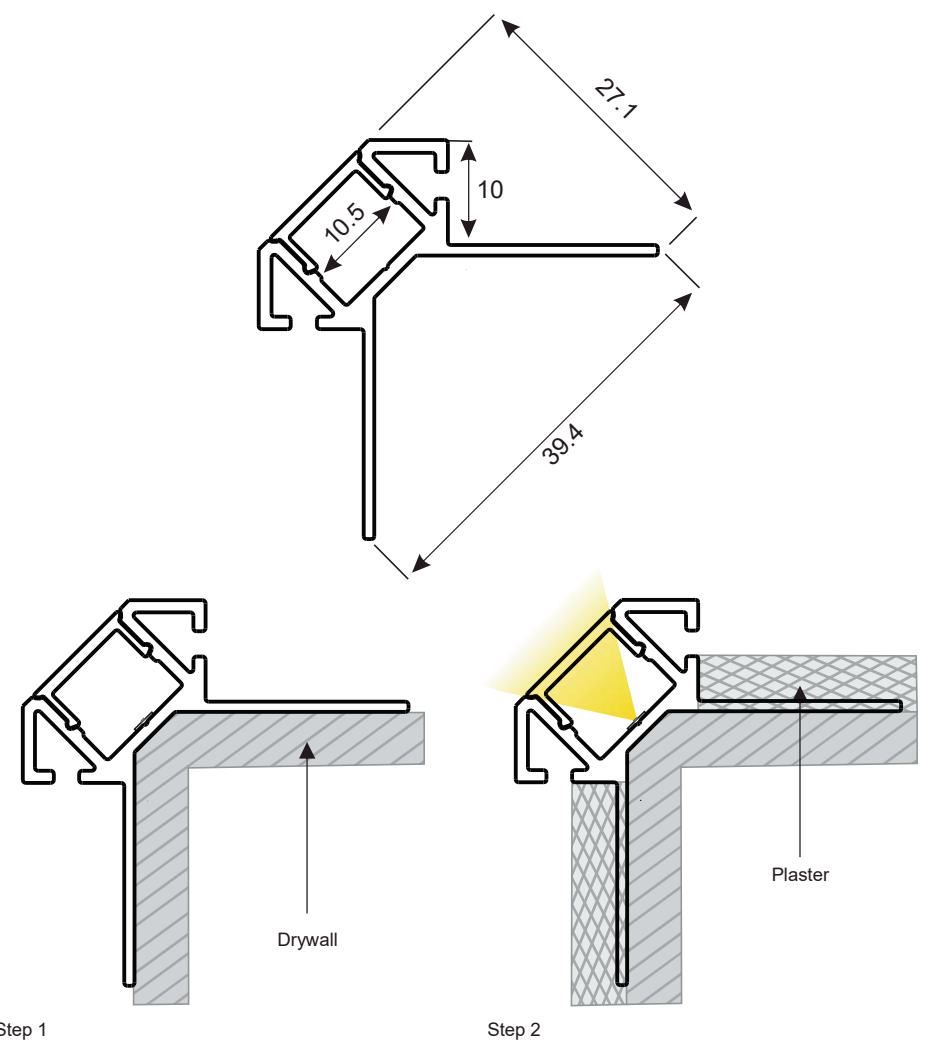


DOME

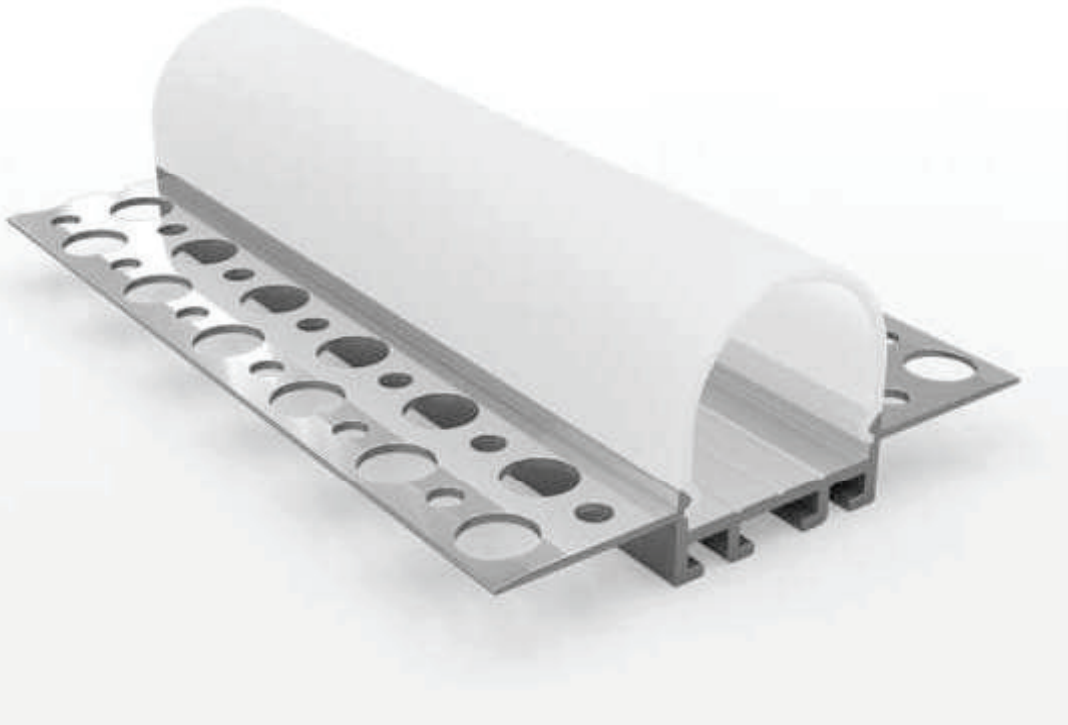


- TRIMLESS PASTER-IN FLAT LIGHT
- Flat LED aluminium profile channel for creating a recessed light effect in a plaster wall.
- 1 meter and 2 Meter length
- Suitable for standard strip up to 8/12/18 mm width
- 28 mm overall depth 7 mm to flange
- 25.4 mm recess width
- 65.4 mm wide flange
- Please also see our range of Led strips and our made to measure service

MODE NAME	: PYTHON
ALUMINIUM HEAT SINK	: ANODISED 6063-T5
COVE	: PC MILKY WHITE
FLAMABILITY	: V2 FIRE RATING FOR PC COVER
END CAP	: PP
HEAT TRANSMISSION PROPERTIES	: AL SPECIFIC HEAT IS 0.88X 10J/(kgx0C)
OPERATING TEMPERATURE	: -30° C ~ + 60° C (22° F~ 140° F)
PCB (MM)	: 8 / 10 / 12 / 18
SIZE	: 1 M / 2 M / CUSTOM
WATTS PER METER	: 9.6-19.2
CCT [K] AND COLORS	: 2300/2700/3000/3500/4000/5000/5700/6500/8000 TUNABLE/RGB/ RGBWW/R,G,B,A,P
CRI	: 80 -85 90 + ON DEMAND
LED PER METER	: 2835 PACKAGE 120 LED / METER

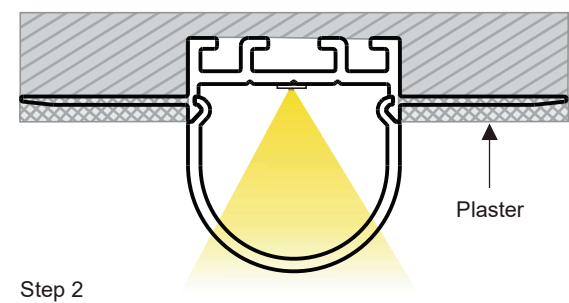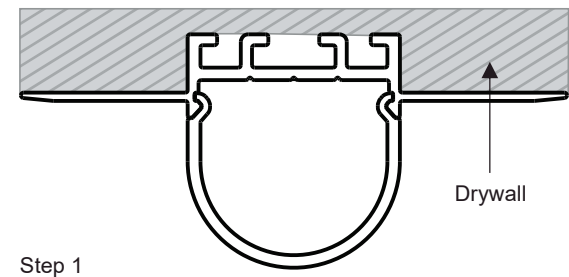
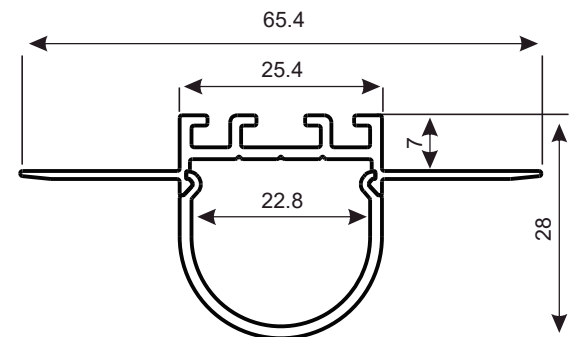


DOPE

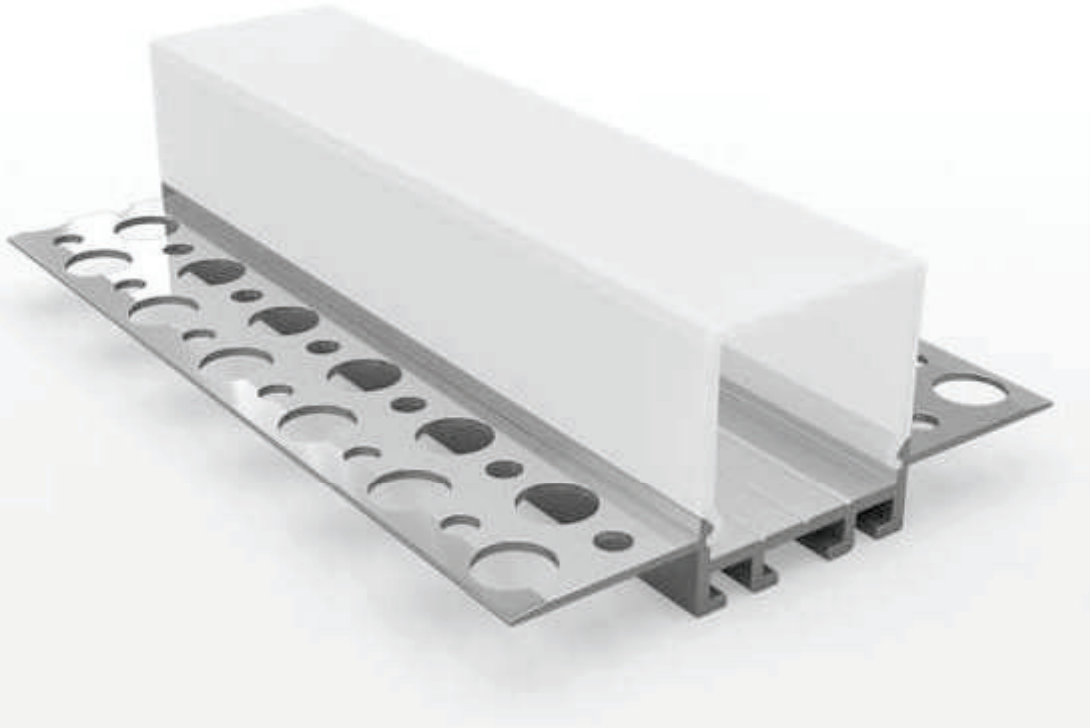


- TRIMLESS PASTER-IN FLAT LIGHT
- Flat LED aluminium profile channel for creating a recessed light effect in a plaster wall.
- 1 meter and 2 Meter length
- Suitable for standard strip up to 8/12/18 mm width
- 28 mm overall depth 7 mm to flange
- 25.4 mm recess width
- 65.4 mm wide flange
- Please also see our range of Led strips and our made to measure service.

MODE NAME	: PYTHON
ALUMINIUM HEAT SINK	: ANODISED 6063-T5
COVE	: PC MILKY WHITE
FLAMABILITY	: V2 FIRE RATING FOR PC COVER
END CAP	: PP
HEAT TRANSMISSION PROPERTIES	: AL SPECIFIC HEAT IS 0.88X 10J/(kgx0C)
OPERATING TEMPERATURE	: -30° C ~ + 60° C (22° F~ 140° F)
PCB (MM)	: 8 / 10 / 12 / 18
SIZE	: 1 M / 2 M / CUSTOM
WATTS PER METER	: 9.6-19.2
CCT [K] AND COLORS	: 2300/2700/3000/3500/4000/5000/5700/6500/8000 TUNABLE/RGB/ RGBWW/R,G,B,A,P
CRI	: 80 ~85 90 + ON DEMAND
LED PER METER	: 2835 PACKAGE 120 LED / METER

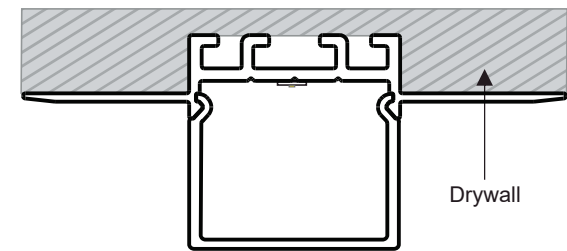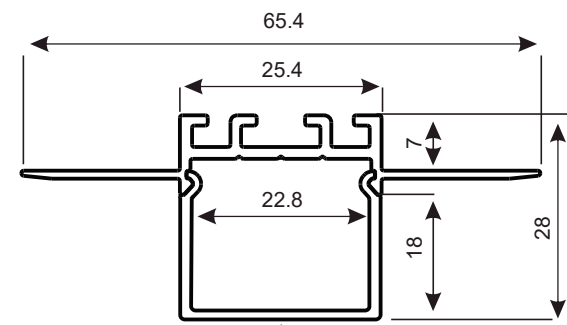



Step 1

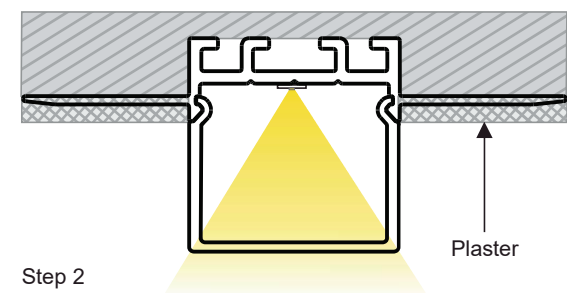


Step 2





24 V DC - IP65 LED NEON FLEX 0410

PART NUMBER	CCT	Input voltage	LED per meter	Watts per meter	Viewing angle	Pictures
DG-NF-04-120-24-22	2200 K	24 v DC	120	7.2 W	120°	 
DG-NF-04-120-24-27	2700 K	24 v DC	120	7.2 W	120°	
DG-NF-04-120-24-30	3000 K	24 v DC	120	7.2 W	120°	
DG-NF-04-120-24-35	3500 K	24 v DC	120	7.2 W	120°	
DG-NF-04-120-24-40	4000 K	24 v DC	120	7.2 W	120°	
DG-NF-04-120-24-50	5000 K	24 v DC	120	7.2 W	120°	
DG-NF-04-120-24-57	5700 K	24 v DC	120	7.2 W	120°	
DG-NF-04-120-24-65	6500 K	24 v DC	120	7.2 W	120°	
DG-NF-04-120-24-10	10000 K	24 v DC	120	7.2 W	120°	
DG-NF-04-120-24-A	AMBER	24 v DC	120	7.2 W	120°	
DG-NF-04-120-24-G	GREEN	24 v DC	120	7.2 W	120°	
DG-NF-04-120-24-R	RED	24 v DC	120	7.2 W	120°	
DG-NF-04-120-24-B	BLUE	24 v DC	120	7.2 W	120°	
DG-NF-04-120-24-P	PINK	24 v DC	120	7.2 W	120°	
DG-NF-04-120-24-I	ICE BLUE	24 v DC	120	7.2 W	120°	
DG-NF-04-120-24-O	ORANGE	24 v DC	120	7.2 W	120°	
DG-NF-04-120-24-F	FLAME	24 v DC	120	7.2 W	120°	
DG-NF-04-120-24-Y	YELLOW	24 v DC	120	7.2 W	120°	


LED DRIVER - MEAN WELL ELG/LPV

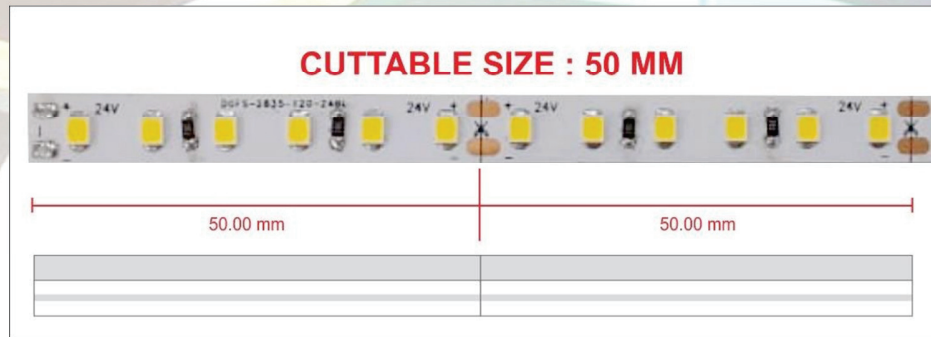


12 V DC - IP65 LED NEON FLEX 0410


PART NUMBER	CCT	Input voltage	LED per meter	Watts per meter	Viewing angle	Pictures
DG-NF-04-144-12-22	2200 K	12 v DC	144	7.2 W	120°	 
DG-NF-04-144-12-27	2700 K	12 v DC	144	7.2 W	120°	
DG-NF-04-144-12-30	3000 K	12 v DC	144	7.2 W	120°	
DG-NF-04-144-12-35	3500 K	12 v DC	144	7.2 W	120°	
DG-NF-04-144-12-40	4000 K	12 v DC	144	7.2 W	120°	
DG-NF-04-144-12-50	5000 K	12 v DC	144	7.2 W	120°	
DG-NF-04-144-12-57	5700 K	12 v DC	144	7.2 W	120°	
DG-NF-04-144-12-65	6500 K	12 v DC	144	7.2 W	120°	
DG-NF-04-144-12-10	10000 K	12 v DC	144	7.2 W	120°	
DG-NF-04-144-12-A	AMBER	12 v DC	144	7.2 W	120°	
DG-NF-04-144-12-G	GREEN	12 v DC	144	7.2 W	120°	
DG-NF-04-144-12-R	RED	12 v DC	144	7.2 W	120°	
DG-NF-04-144-12-B	BLUE	12 v DC	144	7.2 W	120°	
DG-NF-04-144-12-P	PINK	12 v DC	144	7.2 W	120°	
DG-NF-04-144-12-I	ICE BLUE	12 v DC	144	7.2 W	120°	
DG-NF-04-144-12-O	ORANGE	12 v DC	144	7.2 W	120°	
DG-NF-04-144-12-F	FLAME	12 v DC	144	7.2 W	120°	
DG-NF-04-144-12-Y	YELLOW	12 v DC	144	7.2 W	120°	

LED DRIVER - MEAN WELL ELG/LPV

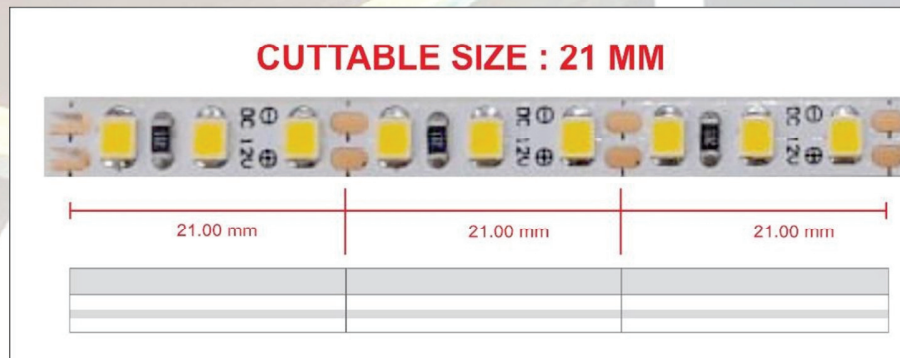


12 V DC - IP65 LED NEON FLEX 0410
[Special for signage applications]

PART NUMBER	CCT	Input voltage	LED per meter	Watts per meter	Viewing angle	Pictures
DG-NF-04-288-12-22	2200 K	12 v DC	288	7.2 W	120°	
DG-NF-04-288-12-27	2700 K	12 v DC	288	7.2 W	120°	
DG-NF-04-288-12-30	3000 K	12 v DC	288	7.2 W	120°	
DG-NF-04-288-12-35	3500 K	12 v DC	288	7.2 W	120°	
DG-NF-04-288-12-40	4000 K	12 v DC	288	7.2 W	120°	
DG-NF-04-288-12-50	5000 K	12 v DC	288	7.2 W	120°	
DG-NF-04-288-12-57	5700 K	12 v DC	288	7.2 W	120°	
DG-NF-04-288-12-65	6500 K	12 v DC	288	7.2 W	120°	
DG-NF-04-288-12-10	10000 K	12 v DC	288	7.2 W	120°	
DG-NF-04-288-12-A	AMBER	12 v DC	288	7.2 W	120°	
DG-NF-04-288-12-G	GREEN	12 v DC	288	7.2 W	120°	
DG-NF-04-288-12-R	RED	12 v DC	288	7.2 W	120°	
DG-NF-04-288-12-B	BLUE	12 v DC	288	7.2 W	120°	
DG-NF-04-288-12-P	PINK	12 v DC	288	7.2 W	120°	
DG-NF-04-288-12-I	ICE BLUE	12 v DC	288	7.2 W	120°	
DG-NF-04-288-12-O	ORANGE	12 v DC	288	7.2 W	120°	
DG-NF-04-288-12-F	FLAME	12 v DC	288	7.2 W	120°	
DG-NF-04-288-12-Y	YELLOW	12 v DC	288	7.2 W	120°	



CUTTABLE SIZE : 10 MM





10.00 mm	10.00 mm	10.00 mm	10.00 mm

LED DRIVER - MEAN WELL ELG/LPV




24 V DC - IP65 LED NEON FLEX 0612

General applications



PART NUMBER	CCT	Input voltage	LED per meter	Watts per meter	Viewing angle	Pictures
DG-NF-06-120-24-22	2200 K	24 v DC	120	7.2 W	120°	 
DG-NF-06-120-24-27	2700 K	24 v DC	120	7.2 W	120°	
DG-NF-06-120-24-30	3000 K	24 v DC	120	7.2 W	120°	
DG-NF-06-120-24-35	3500 K	24 v DC	120	7.2 W	120°	
DG-NF-06-120-24-40	4000 K	24 v DC	120	7.2 W	120°	
DG-NF-06-120-24-50	5000 K	24 v DC	120	7.2 W	120°	
DG-NF-06-120-24-57	5700 K	24 v DC	120	7.2 W	120°	
DG-NF-06-120-24-65	6500 K	24 v DC	120	7.2 W	120°	
DG-NF-06-120-24-10	10000 K	24 v DC	120	7.2 W	120°	
DG-NF-06-120-24-A	AMBER	24 v DC	120	7.2 W	120°	
DG-NF-06-120-24-B	GREEN	24 v DC	120	7.2 W	120°	
DG-NF-06-120-24-R	RED	24 v DC	120	7.2 W	120°	
DG-NF-06-120-24-B	BLUE	24 v DC	120	7.2 W	120°	
DG-NF-06-120-24-P	PINK	24 v DC	120	7.2 W	120°	
DG-NF-06-120-24-I	ICE BLUE	24 v DC	120	7.2 W	120°	
DG-NF-06-120-24-O	ORANGE	24 v DC	120	7.2 W	120°	
DG-NF-06-120-24-F	FLAME	24 v DC	120	7.2 W	120°	
DG-NF-06-120-24-Y	YELLOW	24 v DC	120	7.2 W	120°	

LED DRIVER - MEAN WELL ELG/LPV

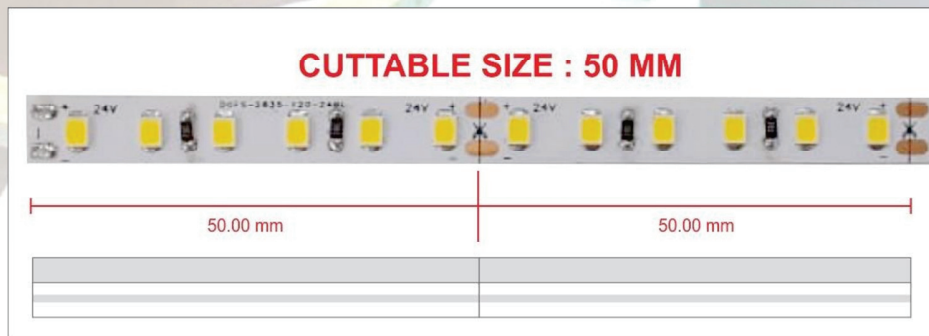

12 V DC - IP65 LED NEON FLEX 0612

Signage and Display applications

PART NUMBER	CCT	Input voltage	LED per meter	Watts per meter	Viewing angle	Pictures
DG-NF-06-144-12-22	2200 K	12 v DC	144	7.2 W	120°	
DG-NF-06-144-12-27	2700 K	12 v DC	144	7.2 W	120°	
DG-NF-06-144-12-30	3000 K	12 v DC	144	7.2 W	120°	
DG-NF-06-144-12-35	3500 K	12 v DC	144	7.2 W	120°	
DG-NF-06-144-12-40	4000 K	12 v DC	144	7.2 W	120°	
DG-NF-06-144-12-50	5000 K	12 v DC	144	7.2 W	120°	
DG-NF-06-144-12-57	5700 K	12 v DC	144	7.2 W	120°	
DG-NF-06-144-12-65	6500 K	12 v DC	144	7.2 W	120°	
DG-NF-06-144-12-10	10000 K	12 v DC	144	7.2 W	120°	
DG-NF-06-144-12-A	AMBER	12 v DC	144	7.2 W	120°	
DG-NF-06-144-12-G	GREEN	12 v DC	144	7.2 W	120°	
DG-NF-06-144-12-R	RED	12 v DC	144	7.2 W	120°	
DG-NF-06-144-12-B	BLUE	12 v DC	144	7.2 W	120°	
DG-NF-06-144-12-P	PINK	12 v DC	144	7.2 W	120°	
DG-NF-06-144-12-I	ICE BLUE	12 v DC	144	7.2 W	120°	
DG-NF-06-144-12-O	ORANGE	12 v DC	144	7.2 W	120°	
DG-NF-06-144-12-F	FLAME	12 v DC	144	7.2 W	120°	
DG-NF-06-144-12-Y	YELLOW	12 v DC	144	7.2 W	120°	



CUTTABLE SIZE : 21 MM




LED DRIVER - MEAN WELL ELG/LPV



24 V DC - IP65 LED NEON FLEX 0817



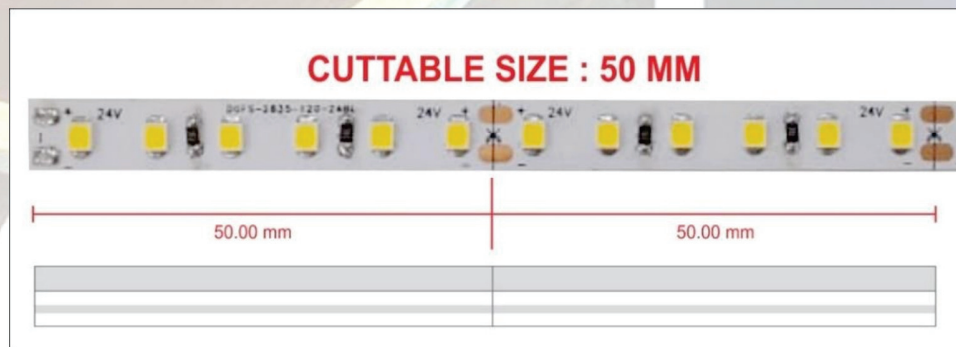




PART NUMBER	CCI	Input voltage	LED per meter	Watts per meter	Viewing angle	Pictures
DG-NF-08-120-24-22	2200 K	24 v DC	120	9.6 W	120°	 
DG-NF-08-120-24-27	2700 K	24 v DC	120	9.6 W	120°	
DG-NF-08-120-24-30	3000 K	24 v DC	120	9.6 W	120°	
DG-NF-08-120-24-35	3500 K	24 v DC	120	9.6 W	120°	
DG-NF-08-120-24-40	4000 K	24 v DC	120	9.6 W	120°	
DG-NF-08-120-24-50	5000 K	24 v DC	120	9.6 W	120°	
DG-NF-08-120-24-57	5700 K	24 v DC	120	9.6 W	120°	
DG-NF-08-120-24-65	6500 K	24 v DC	120	9.6 W	120°	
DG-NF-08-120-24-10	10000 K	24 v DC	120	9.6 W	120°	
DG-NF-08-120-24-A	Amber	24 v DC	120	9.6 W	120°	
DG-NF-08-120-24-G	Green	24 v DC	120	9.6 W	120°	
DG-NF-08-120-24-R	Red	24 v DC	120	9.6 W	120°	
DG-NF-08-120-24-B	Blue	24 v DC	120	9.6 W	120°	
DG-NF-08-120-24-P	pink	24 v DC	120	9.6 W	120°	
DG-NF-08-120-24-I	Ice Blue	24 v DC	120	9.6 W	120°	
DG-NF-08-120-24-O	Orange	24 v DC	120	9.6 W	120°	
DG-NF-08-120-24-F	Flame	24 v DC	120	9.6 W	120°	
DG-NF-08-120-24-Y	Yellow	24 v DC	120	9.6 W	120°	
















LED DRIVER - MEAN WELL ELG/LPV



SUPPORTING ACCESSORIES FOR NEON FLEX ASSEMBLING

Sr. NO.	Item code	Accessories	Cross Sec.	Pictures
1	DG-NF-01	End cap for 0410	-	
2	DG-NF-02	End cap for 0612	-	
3	DG-NF-03	End cap for 0817	-	
4	DG-NF-04	Linear Aluminum profile for 0410 NEO 4Y		
5	DG-NF-05	Linear Aluminum profile for 0410 NEO 4F		

6	DG-NF-06	Aluminum profile for 0410 NEO 4U			
7	DG-NF-07	SS clip for 0410			
8	DG-NF-08	Aluminum profile for 0612	-		
9	DG-NF-09	PVC profile for 0410			
10	DG-NF-10	SS clip for 0612			
11	DG-NF-11	Aluminum profile for 0817			

12	DG-NF-12	AL clip for 0817			
13	DG-NF-13	Silicone end cap sealing Glue			

Terms & Conditions:

- 1] For Indoor/outdoor use only. This Neon flex cannot use underwater applications.
- 2] Only use with approved HIGH QUALITY approved drivers/ SMPS.
- 3] Limited 2 Year warranty.
- 4] Must be cut on specified cut marks. Wrong cutting of strip will void warranty.
- 5] Handling must be done with care or LED may damage resulting open circuits which is not part of warranty.
- 6] Only available in 5 meter reel packing. Custom size available on request against special price.
- 7] Warranty is either repair or replace depending on the status of fault.



RAJ ELECTRICALS


583, NARAYAN PETH, NEAR KANYASHALA, PUNE-411030.

PH NO.020-24455293/24461156.

CELL NO.09822332340/9881245432

E-MAIL-lighting@rajelectricals.co.in/ sales@rajelectricals.co.in

TRIMLESS LED PROFILES



digiopto

TECHNOLOGIES PVT. LTD.



PROFESSIONAL RECESSED PLASTER IN ALUMINIUM PROFILE LIGHTING FOR OFFICE AND RESIDENCES BY DIGILED

Introduction:

Dry wall profile led lighting is Ideal for ambient and primary lighting. Create amazing jaw dropping lighting in your space with this plaster in to Gypsum board profile. One or two lines of our strips in profile creates up to 1000-2000 lumens per meter depending on requirement with the milky diffuser and eliminates any spotting or shadowing for a seamless light output.

Sizes: Available in 1m and 2m lengths

Various color temperatures and other combinations below:

- White/ Warm white = 2200k, 2700k, 3000k, 4000k, 5000k, 6500k, 8000k,
- RGB, RGBW, RGBWW
- Color Tunable, warm tunable, wide range 2200k to 8000k tunable.

Applications:

Designed to be plastered into ceiling of walls, the profile will leave no visible trim. Ideal for mounting in Dry wall and Plaster board.

Incredible finish for high end installations is possible.

Skirting board led lights: - Use our DigiLED strip lights to create beautiful courtesy lighting

Drywall led lighting: - Use our DigiLED Strips in our range of led drywall channel to create awesome flush mount linear wall feature lighting

- Drywall Corner beads
- Wall reveals
- Recessed lighting
- Plaster-in LED system

The DRYWALL ALUMINIUM PROFILES are suitable for a seamless installation as wall or ceiling lighting in drywall installations.

Horizontal or vertical installations

Seamless integration possible

Four different shapes of high quality plastic covers are available:

Flat, oval, round and square, rectangle etc.

Each of the four shapes are available in crystal clear, frost (semitransparent) and milky frost (opal). The flat cover (FLAT) is also supplied in black (translucent effect).

Profile advantage:

The LED aluminum channels protect the LED Strip lighting and also act as a heat sink, extending the lifespan of the flexible LED's. Common terms used in the industry for these profiles include 'mud in profiles' and 'gypsum led profiles'.

Why DigiLED profiles?

DigiLED aluminium profiles are the perfect addition to the DigiLED Rigid STRIPS. The Rigid STRIPS can be glued into the profile. The aluminum profiles are in anodized aluminium available. The profile can simply be sawn to any required length or ordered in the required custom length. Different versions of Aluminium profiles and different shapes of plastic covers are available. In addition we offer a wide range of accessories.

Supply:

We stock these profiles at our warehouse in Vasai, Maharashtra and can ship to all parts of the India and abroad.

Technical Support:

DigiLED being into LED linear lighting industry for more than 10 year, can offer you excellent support on technical issues like Planning, wiring, basic installations, power management, technical drawings, fault finding. Our technical team is very well expertise into solving on site issues and will guide you with best support and directions towards the successful installations.




DRYWALL PROFILES



COBRA



ARIZON



ARCO



TEXAS



CONTENT

4 PYTHON

5 ARCO

6 ARIZON

7 BOA

9 TEXAS

10 VIPERS

11 COBRA

12 GREEN

14 CASPIAN


15 BATS

16 BIRD


17 DOME

18 DOPE



PYTHON

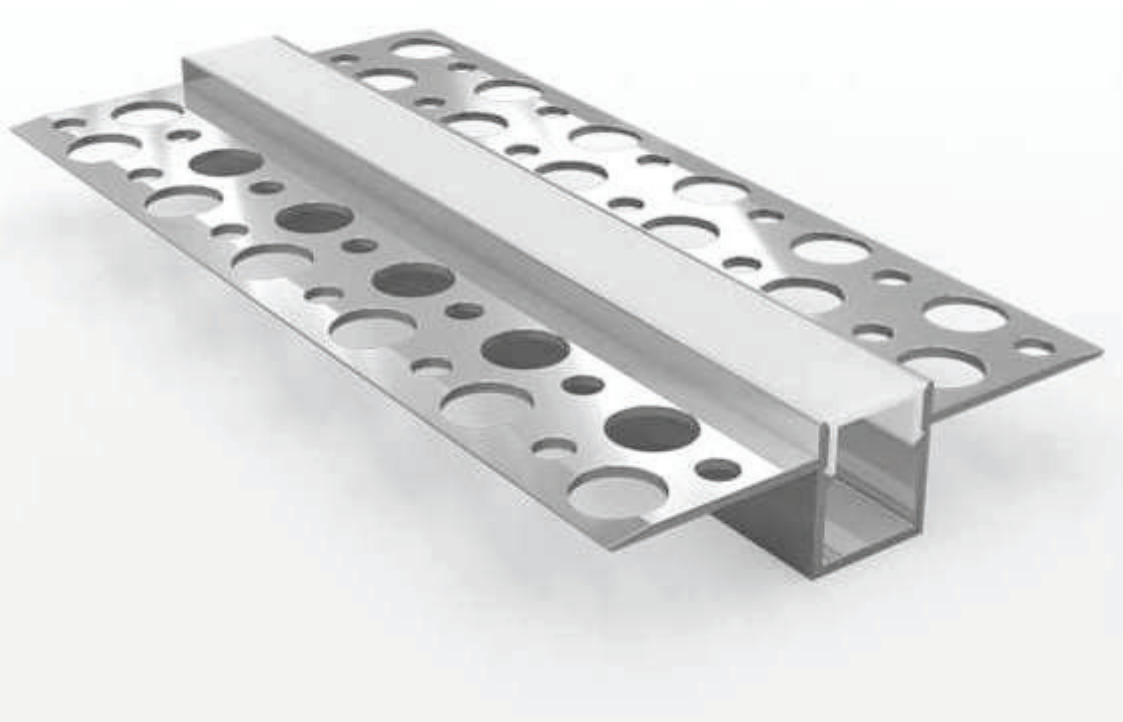


- TRIMLESS PASTER-IN FLAT LIGHT
- Flat LED aluminum profile channel for creating a recessed light effect in a plaster wall.
- 1 meter and 2 Meter length
- Suitable for standard strip up to 8/ 10 mm width
- 14mm overall depth, 10mm to flange
- 13 mm recess width
- 53 mm wide flange
- Please also see our range of Led strips and our made to measure service

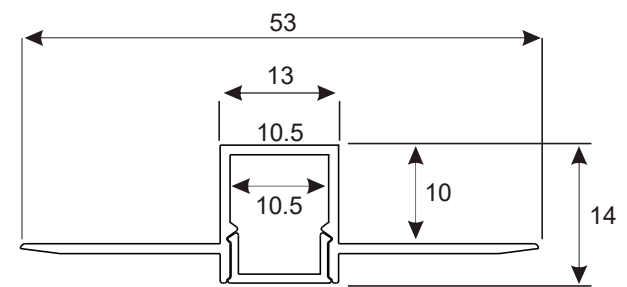

MODE NAME	: PYTHON
ALUMINIUM HEAT SINK	: ANODISED 6063-T5
COVE	: PC MILKY WHITE
FLAMABILITY	: V2 FIRE RATING FOR PC COVER
END CAP	: PP
HEAT TRANSMISSION PROPERTIES	: AL SPECIFIC HEAT IS 0.88X 10J/(kgx0C)
OPERATING TEMPERATURE	: -30° C ~ + 60° C (22° F~ 140° F)
PCB (MM)	: 8 / 10
SIZE	: 1 M / 2 M / CUSTOM
WATTS PER METER	: 9.6-14.4
CCT [K] AND COLORS	: 2300/2700/3000/3500/4000/5000/5700/6500/ 8000 TUNABLE/RGB/ RGBWW/R,G,B,A,P
CRI	: 80 ~85 90 + ON DEMAND
LED PER METER	: 2835 PACKAGE 120 LED / METER

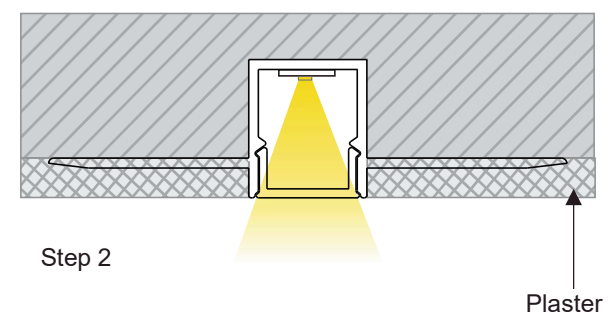
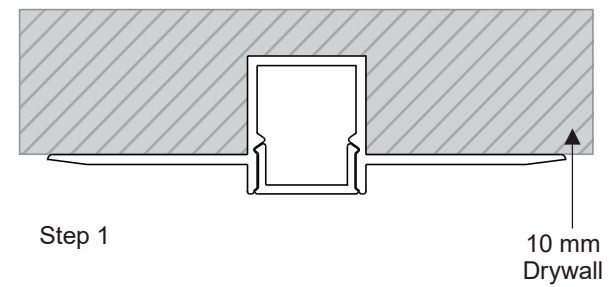


ARCO

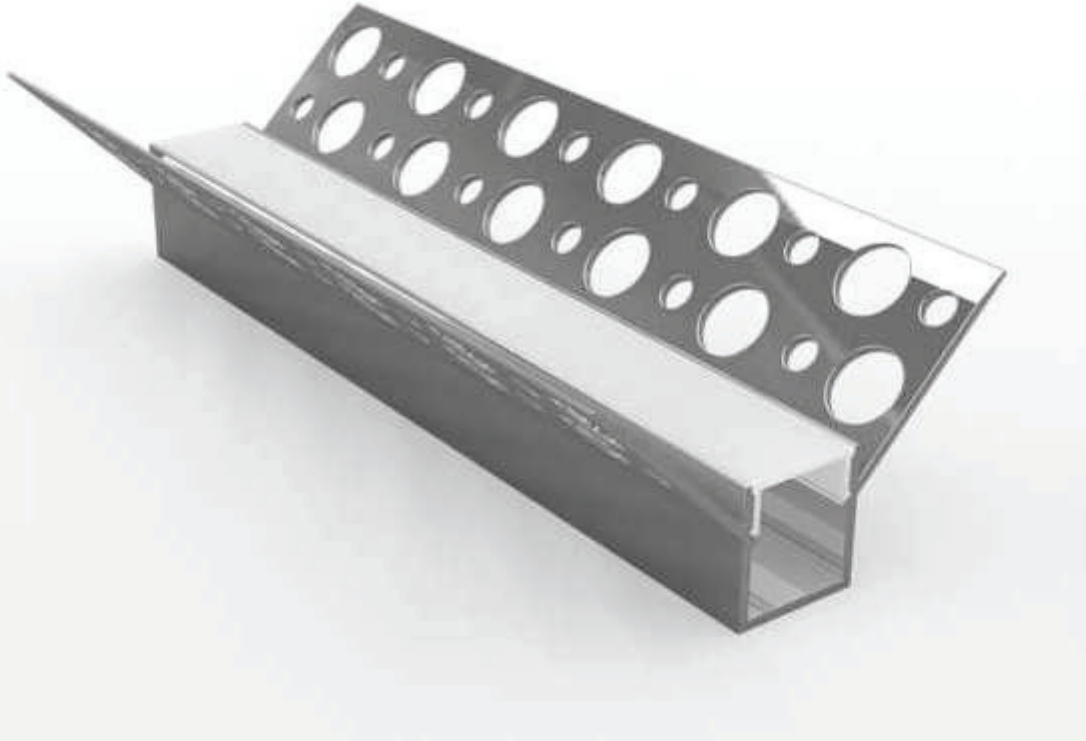


- TRIMLESS PASTER-IN INTERNAL CORNER LIGHT
- Flat LED aluminium profile channel for creating a recessed light effect in a plaster wall.
- 1 meter and 2 Meter length
- Suitable for standard strip up to 8/10 mm width
- 14 mm overall depth , 8.8mm to flange.
- 13 mm recess width
- 46 mm wide flange
- Please also see our range of Led strips and our made to measure service

MODE NAME	: PYTHON
ALUMINIUM HEAT SINK	: ANODISED 6063-T5
COVE	: PC MILKY WHITE
FLAMABILITY	: V2 FIRE RATING FOR PC COVER
END CAP	: PP
HEAT TRANSMISSION PROPERTIES	: AL SPECIFIC HEAT IS 0.88X 10J/(kgx0C)
OPERATING TEMPERATURE	: -30° C ~ + 60° C (22° F~ 140° F)
PCB (MM)	: 8 / 10
SIZE	: 1 M / 2 M / CUSTOM
WATTS PER METER	: 9.6-14.4
CCT [K] AND COLORS	: 2300/2700/3000/3500/4000/5000/5700/6500/8000 TUNABLE/RGB/ RGBWW/R,G,B,A,P
CRI	: 80 ~85 90 + ON DEMAND
LED PER METER	: 2835 PACKAGE 120 LED / METER

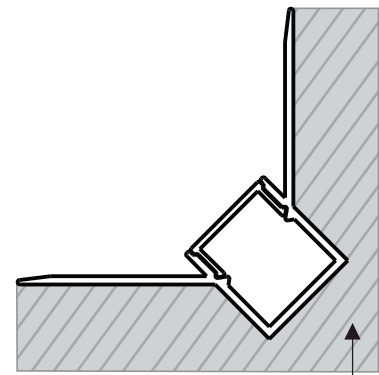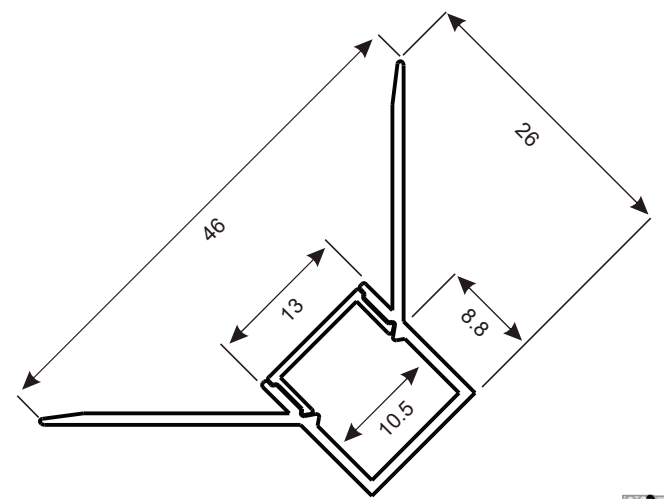

Step 1

10 mm Drywall

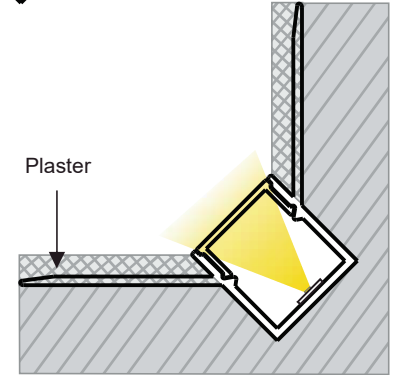

Step 2





ARIZON




- TRIMLESS PASTER-IN EXTERNAL CORNER LIGHT
- Flat LED aluminium profile channel for creating a recessed light effect in a plaster wall.
- 1 meter and 2 Meter length
- Suitable for standard strip up to 8/ 10 mm width
- 14 mm overall depth .6.8 mm to flange
- 13.1 mm recess width
- 50.6 mm wide flange
- Please also see our range of Led strips and our made to measure service

MODE NAME	: PYTHON
ALUMINIUM HEAT SINK	: ANODISED 6063-T5
COVE	: PC MILKY WHITE
FLAMABILITY	: V2 FIRE RATING FOR PC COVER
END CAP	: PP
HEAT TRANSMISSION PROPERTIES	: AL SPECIFIC HEAT IS 0.88X 10J/(kgx0C)
OPERATING TEMPERATURE	: -30° C ~ + 60° C (22° F~ 140° F)
PCB (MM)	: 8 / 10
SIZE	: 1 M / 2 M / CUSTOM
WATTS PER METER	: 9.6-14.4
CCT [K] AND COLORS	: 2300/2700/3000/3500/4000/5000/5700/6500/8000 TUNABLE/RGB/ RGBWW/R,G,B,A,P
CRI	: 80 -85 90 + ON DEMAND
LED PER METER	: 2835 PACKAGE 120 LED / METER


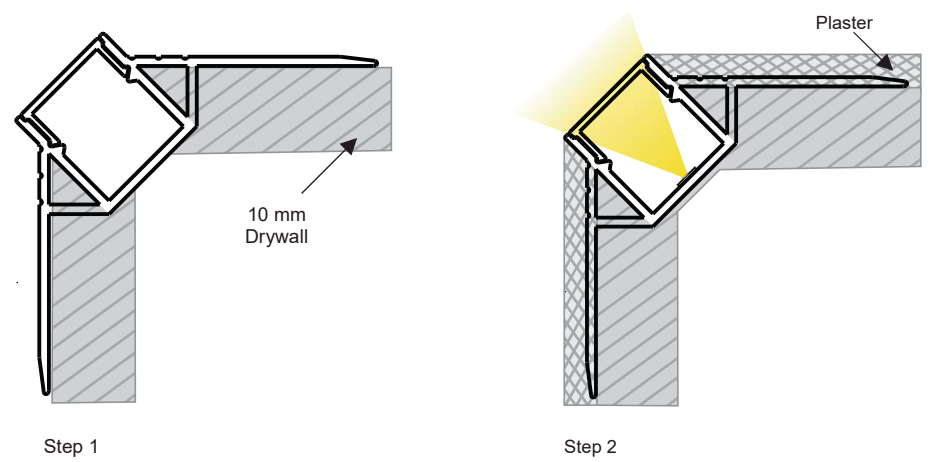
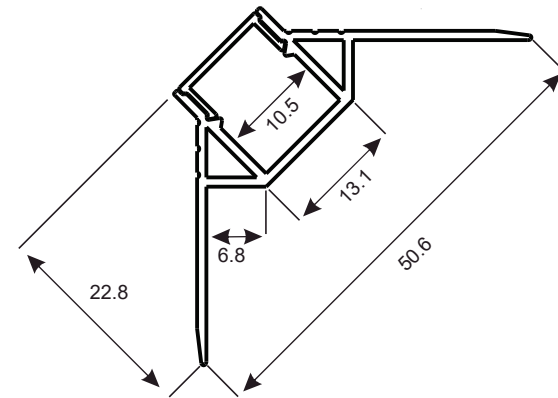


BOA

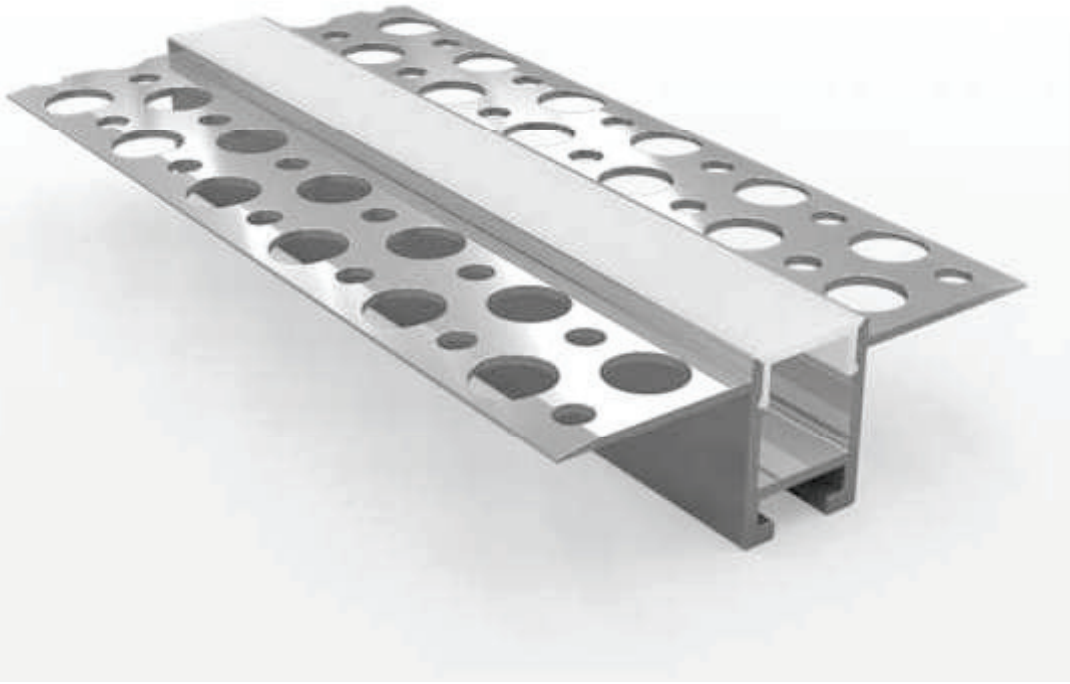


- TRIMLESS PASTER-IN FLAT LIGHT
- Flat LED aluminium profile channel for creating a recessed light effect in a plaster wall.
- 1 meter and 2 Meter length
- Suitable for standard strip up to 8/ 10 mm width
- 18.5 mm overall depth 15.5 mm to flange
- 13 mm recess width
- 53 mm wide flange
- Please also see our range of Led strips and our made to measure service

MODE NAME	: PYTHON
ALUMINIUM HEAT SINK	: ANODISED 6063-T5
COVE	: PC MILKY WHITE
FLAMABILITY	: V2 FIRE RATING FOR PC COVER
END CAP	: PP
HEAT TRANSMISSION PROPERTIES	: AL SPECIFIC HEAT IS 0.88X 10J/(kgx0C)
OPERATING TEMPARATURE	: -30° C ~ + 60° C (22° F~ 140° F)
PCB (MM)	: 8 / 10
SIZE	: 1 M / 2 M / CUSTOM
WATTS PER METER	: 9.6-14.4
CCT [K] AND COLORS	: 2300/2700/3000/3500/4000/5000/5700/6500/8000 TUNABLE/RGB/ RGBWW/R,G,B,A,P
CRI	: 80 ~85 90 + ON DEMAND
LED PER METER	: 2835 PACKAGE 120 LED / METER

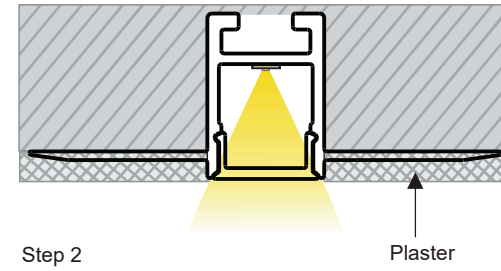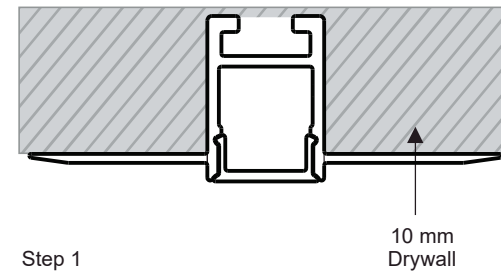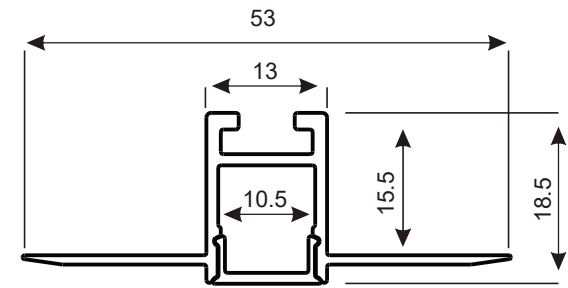







TEXAS

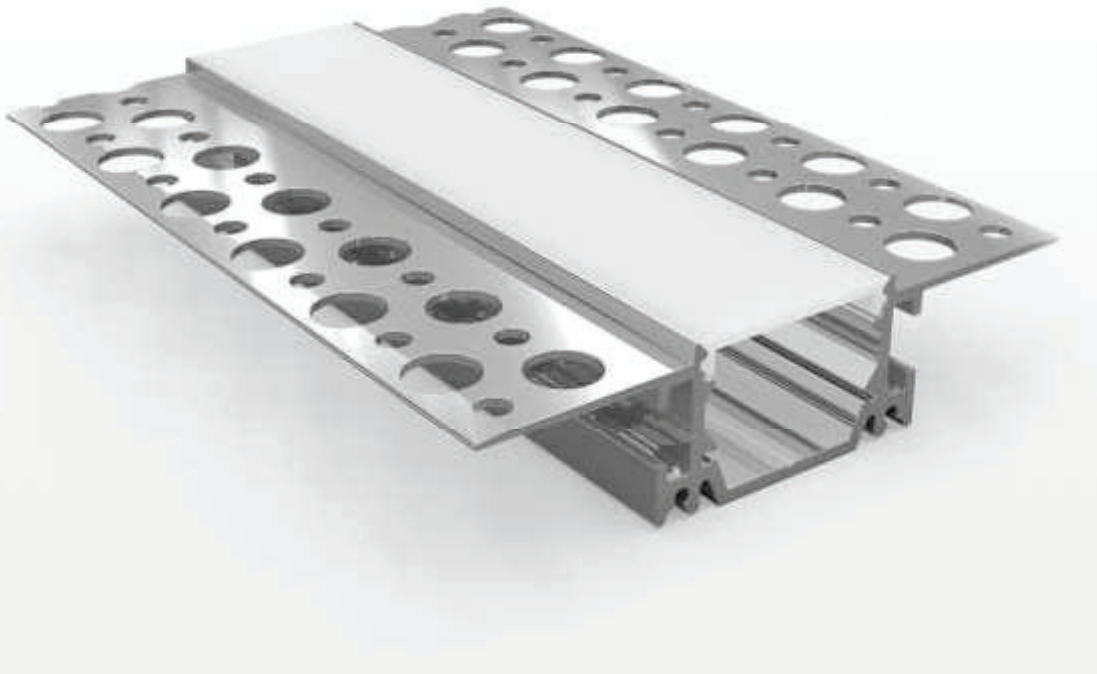


- TRIMLESS PASTER-IN FLAT LIGHT
- Flat LED aluminium profile channel for creating a recessed light effect in a plaster wall.
- 1 meter and 2 Meter length
- Suitable for standard strip up to 8/10/12 mm width
- 18.5 mm overall depth 15.5 mm to flange
- 33 mm recess width
- 73 mm wide flange
- Please also see our range of Led strips and our made to measure service




MODE NAME	: PYTHON
ALUMINIUM HEAT SINK	: ANODISED 6063-T5
COVE	: PC MILKY WHITE
FLAMABILITY	: V2 FIRE RATING FOR PC COVER
END CAP	: PP
HEAT TRANSMISSION PROPERTIES	: AL SPECIFIC HEAT IS 0.88X 10J/(kgx0C)
OPERATING TEMPERATURE	: -30° C ~ + 60° C (22° F~ 140° F)
PCB (MM)	: 8 / 10 / 12
SIZE	: 1 M / 2 M / CUSTOM
WATTS PER METER	: 9.6-19.2
CCT [K] AND COLORS	: 2300/2700/3000/3500/4000/5000/5700/6500/8000 TUNABLE/RGB/ RGBWW/R,G,B,A,P
CRI	: 80 -85 90 + ON DEMAND
LED PER METER	: 2835 PACKAGE 120 LED / METER

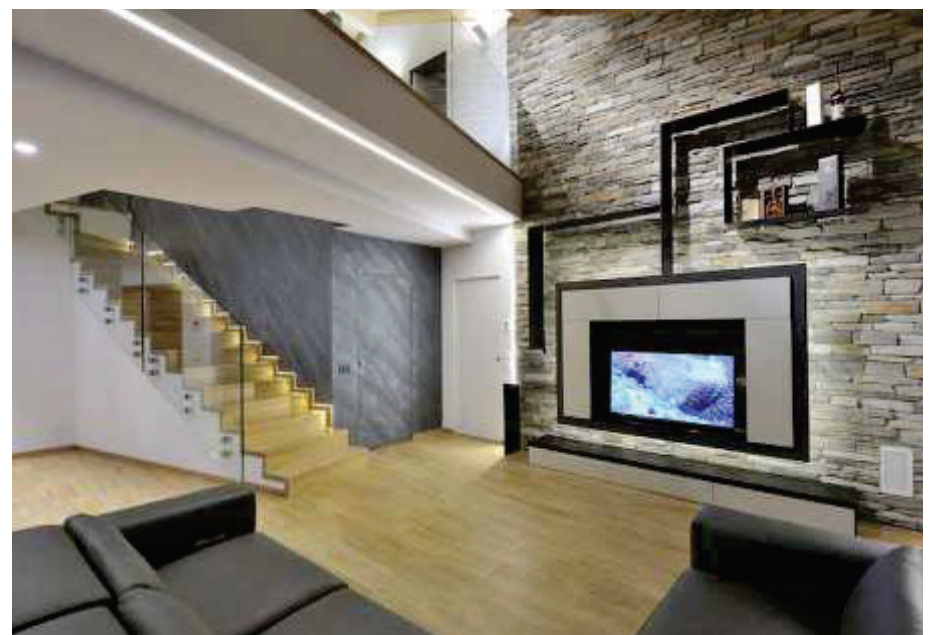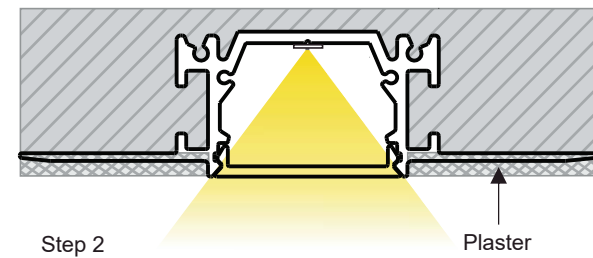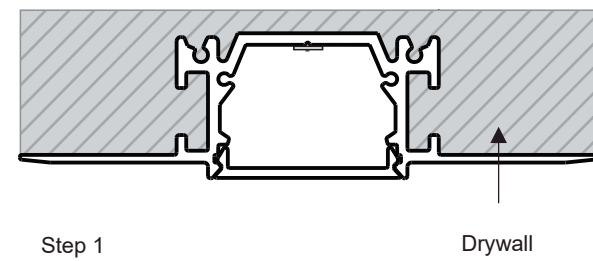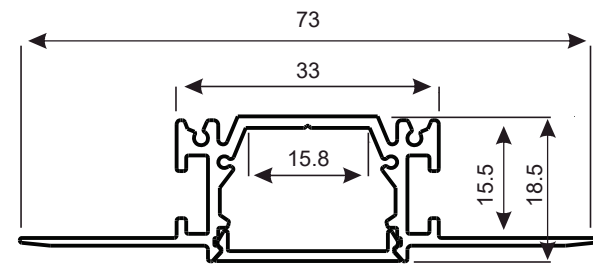


VIPERS

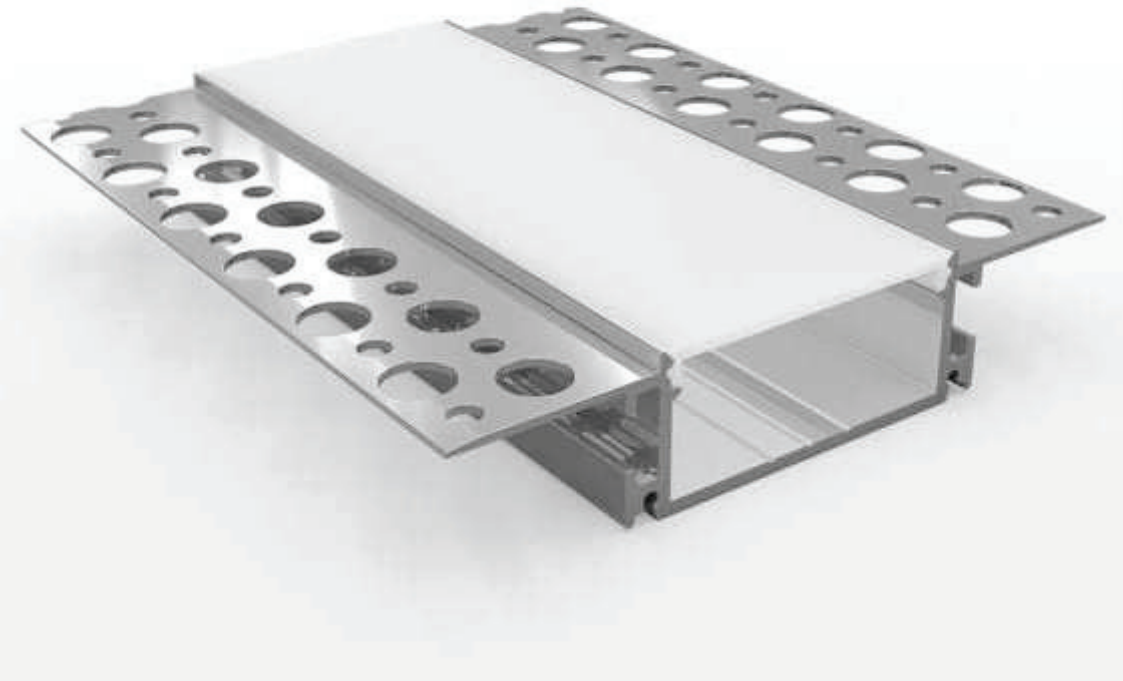


- TRIMLESS PASTER-IN FLAT LIGHT
- Flat LED aluminum profile channel for creating a recessed light effect in a plaster wall.
- 1 meter and 2 Meter length
- Suitable for standard strip up to 8/12/18/25 mm width
- 18.5mm overall depth 15.5mm to flange
- 48 mm recess width
- 88 mm wide flange
- Please also see our range of Led strips and our made to measure service.

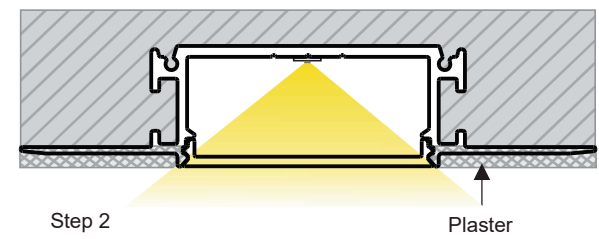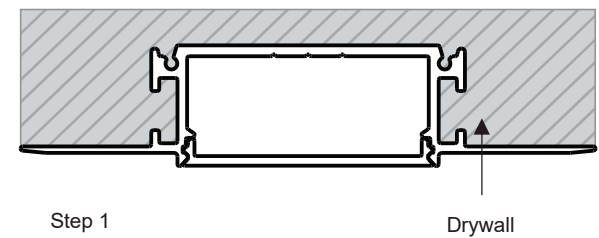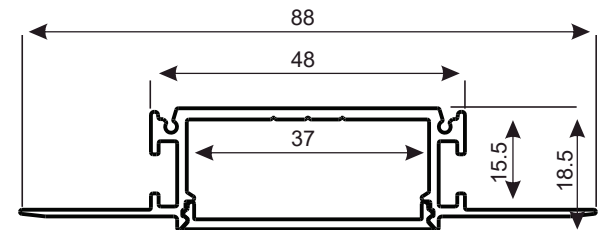

MODE NAME	: PYTHON
ALUMINIUM HEAT SINK	: ANODISED 6063-T5
COVE	: PC MILKY WHITE
FLAMABILITY	: V2 FIRE RATING FOR PC COVER
END CAP	: PP
HEAT TRANSMISSION PROPERTIES	: AL SPECIFIC HEAT IS 0.88X 10J/(kgx0C)
OPERATING TEMPARATURE	: -30° C ~ + 60° C (22° F~ 140° F)
PCB (MM)	: 8 / 10 / 12 / 18 / 25
SIZE	: 1 M / 2 M / CUSTOM
WATTS PER METER	: 9.6-22.0
CCT [K] AND COLORS	: 2300/2700/3000/3500/4000/5000/5700/6500/8000 TUNABLE/RGB/ RGBWW/R,G,B,A,P
CRI	: 80 ~85 90 + ON DEMAND
LED PER METER	: 2835 PACKAGE 120 LED / METER



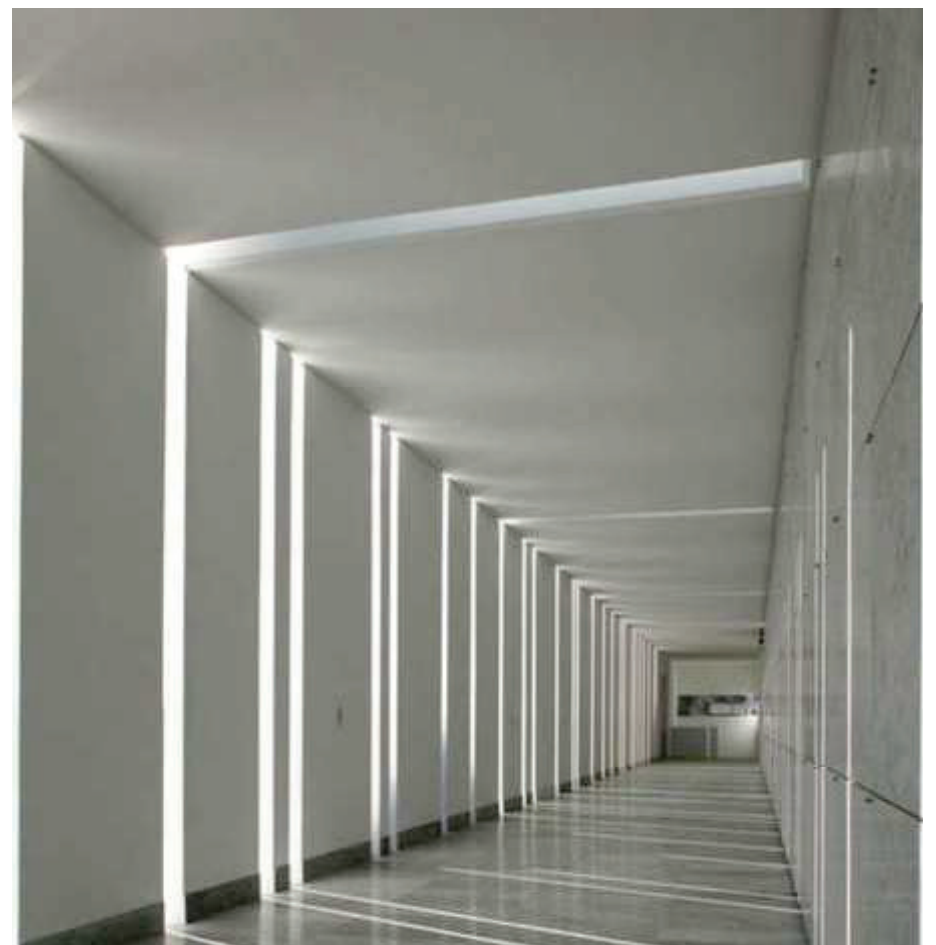


COBRA

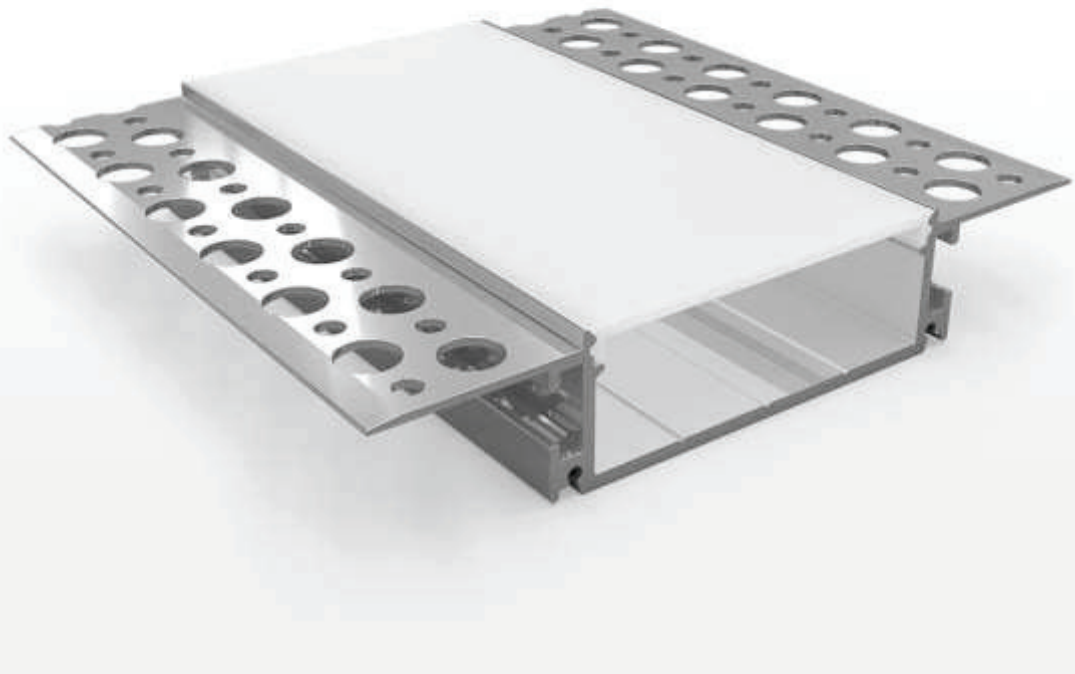


- TRIMLESS PASTER-IN FLAT LIGHT
- Flat LED aluminum profile channel for creating a recessed light effect in a plaster wall.
- 1 meter and 2 Meter length
- Suitable for standard strip up to 8/12/18/25 mm width
- 18.5 mm overall depth 15.5 mm to flange
- 64 mm recess width
- 104 mm wide flange
- Please also see our range of Led strips and our made to measure service.



MODE NAME	: PYTHON
ALUMINIUM HEAT SINK	: ANODISED 6063-T5
COVE	: PC MILKY WHITE
FLAMABILITY	: V2 FIRE RATING FOR PC COVER
END CAP	: PP
HEAT TRANSMISSION PROPERTIES	: AL SPECIFIC HEAT IS 0.88X 10J/(kgx0C)
OPERATING TEMPARATURE	: -30° C ~ + 60° C (22° F~ 140° F)
PCB (MM)	: 8 / 10 / 12 / 18 / 25
SIZE	: 1 M / 2 M / CUSTOM
WATTS PER METER	: 9.6-28.8
CCT [K] AND COLORS	: 2300/2700/3000/3500/4000/5000/5700/6500/8000 TUNABLE/RGB/ RGBWW/R,G,B,A,P
CRI	: 80 ~85 90 + ON DEMAND
LED PER METER	: 2835 PACKAGE 120 LED / METER

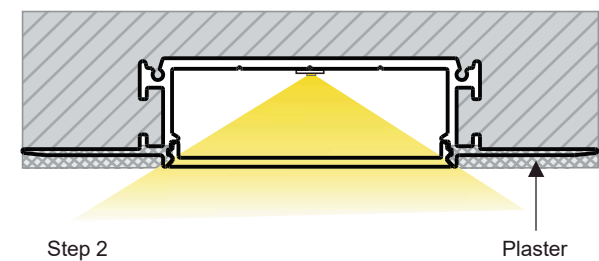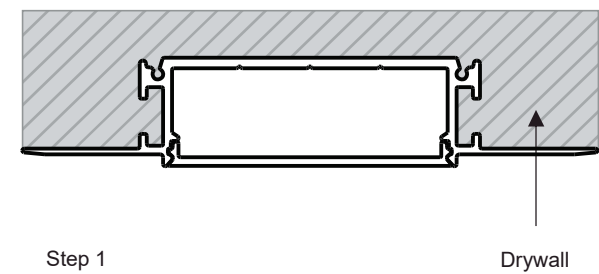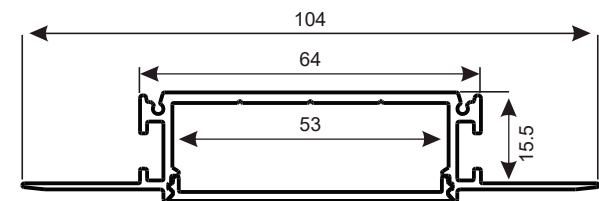


GREEN

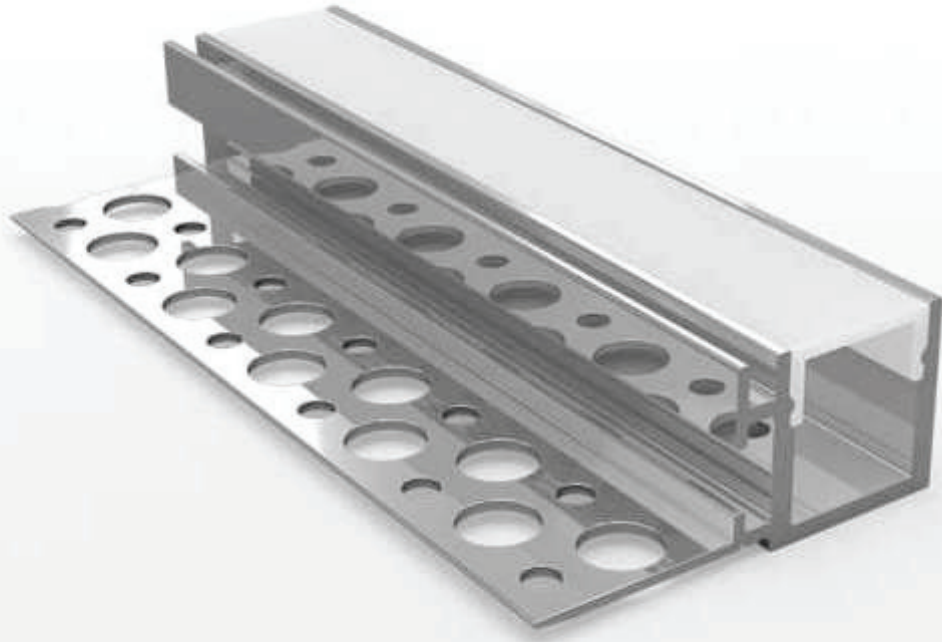

- TRIMLESS PASTER-IN FLAT LIGHT
- Flat LED aluminium profile channel for creating a recessed light effect in a plaster wall.
- 1 meter and 2 Meter length
- Suitable for standard strip up to 8/10/12 mm width
- 19 mm overall depth 16 mm to flange
- 22.5 mm recess width
- 42.5 mm wide flange
- Please also see our range of Led strips and our made to measure service.

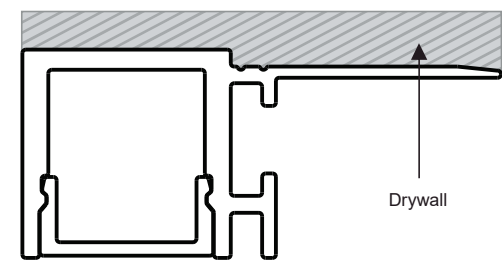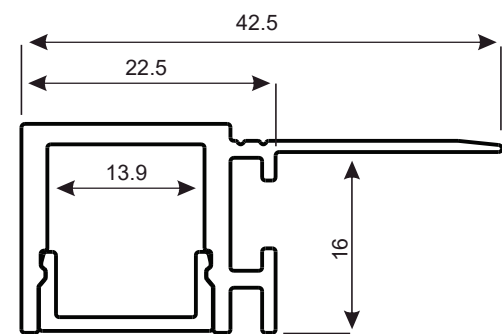

Step 1

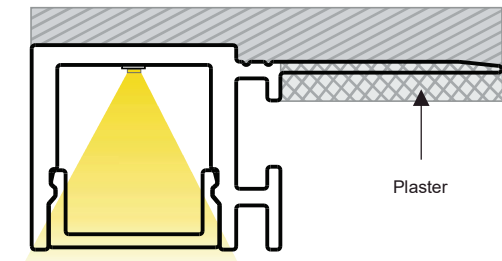


Step 2

MODE NAME	: PYTHON
ALUMINIUM HEAT SINK	: ANODISED 6063-T5
COVE	: PC MILKY WHITE
FLAMABILITY	: V2 FIRE RATING FOR PC COVER
END CAP	: PP
HEAT TRANSMISSION PROPERTIES	: AL SPECIFIC HEAT IS 0.88X 10J/(kgx0C)
OPERATING TEMPERATURE	: -30° C ~ + 60° C (22° F~ 140° F)
PCB (MM)	: 8 / 10 / 12
SIZE	: 1 M / 2 M / CUSTOM
WATTS PER METER	: 9.6-14.4
CCT [K] AND COLORS	: 2300/2700/3000/3500/4000/5000/5700/6500/8000 TUNABLE/RGB/ RGBWW/R,G,B,A,P
CRI	: 80 ~85 90 + ON DEMAND
LED PER METER	: 2835 PACKAGE 120 LED / METER








CASPIAN

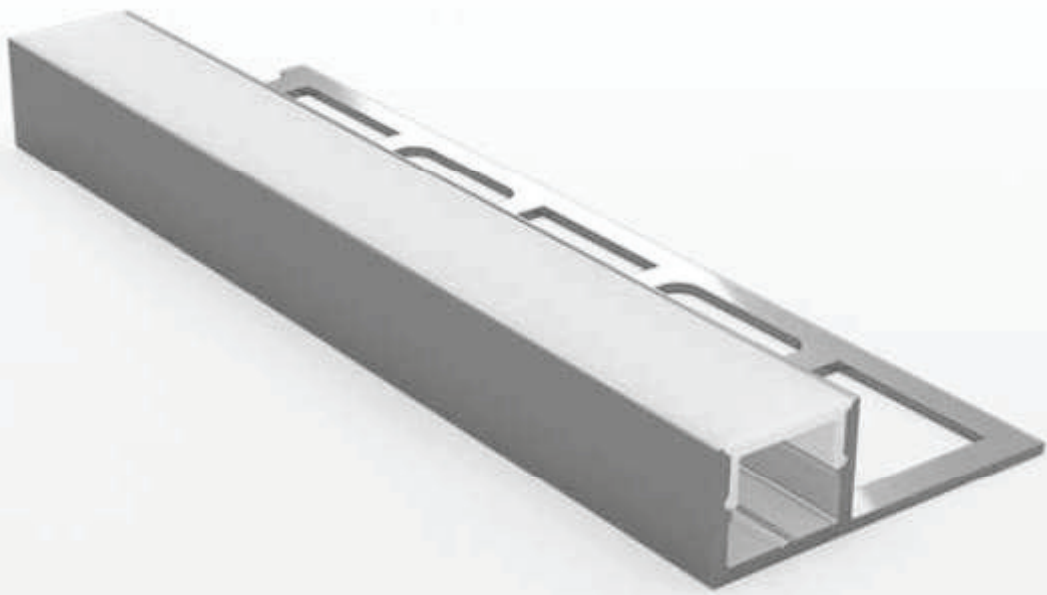

- TRIMLESS PASTER-IN TILE EDGE LIGHT
- Flat LED aluminium profile channel for creating a recessed light effect in a plaster wall.
- 1 meter and 2 Meter length
- Suitable for standard strip up to 8/10 mm width
- 11 mm overall depth 10mm to flange
- 13 mm recess width
- 33 mm wide flange
- Please also see our range of Led strips and our made to measure service.

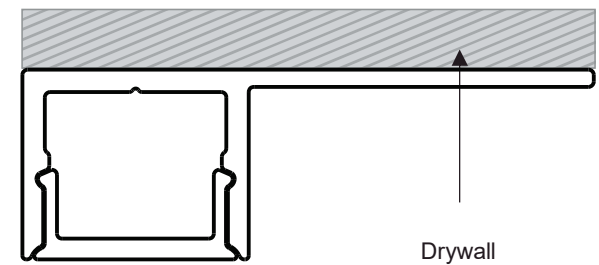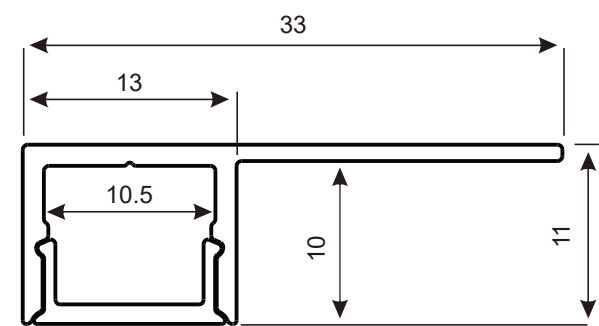


Step 1

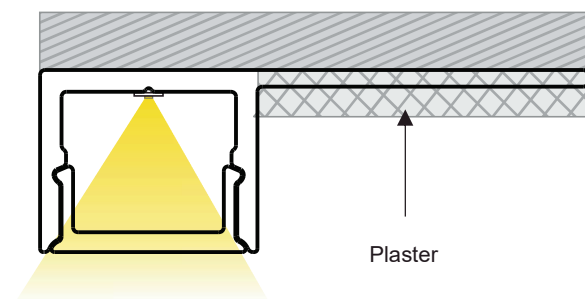


MODE NAME	: PYTHON
ALUMINIUM HEAT SINK	: ANODISED 6063-T5
COVE	: PC MILKY WHITE
FLAMABILITY	: V2 FIRE RATING FOR PC COVER
END CAP	: PP
HEAT TRANSMISSION PROPERTIES	: AL SPECIFIC HEAT IS 0.88X 10J/(kgx0C)
OPERATING TEMPERATURE	: -30° C ~ + 60° C (22° F ~ 140° F)
PCB (MM)	: 8 / 10
SIZE	: 1 M / 2 M / CUSTOM
WATTS PER METER	: 9.6-14.4
CCT [K] AND COLORS	: 2300/2700/3000/3500/4000/5000/5700/6500/8000 TUNABLE/RGB/ RGBWW/R,G,B,A,P
CRI	: 80 ~85 90 + ON DEMAND
LED PER METER	: 2835 PACKAGE 120 LED / METER




BATS

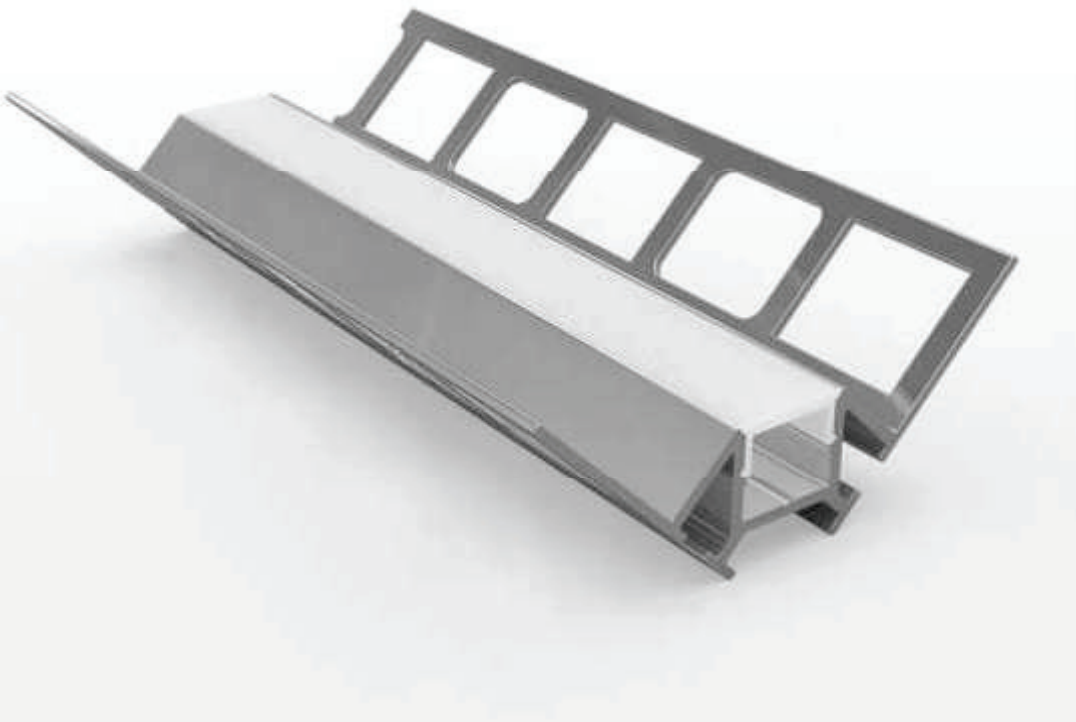


- TRIMLESS PASTER-IN TILED EXTERNAL CORNER LIGHT
- Flat LED aluminium profile channel for creating a recessed light effect in a plaster wall.
- 1 meter and 2 Meter length
- Suitable for standard strip up to 8/10 mm width
- 11mm overall depth 10mm to flange
- 11.5 mm recess width
- 56.3 mm wide flange
- Please also see our range of Led strips and our made to measure service.

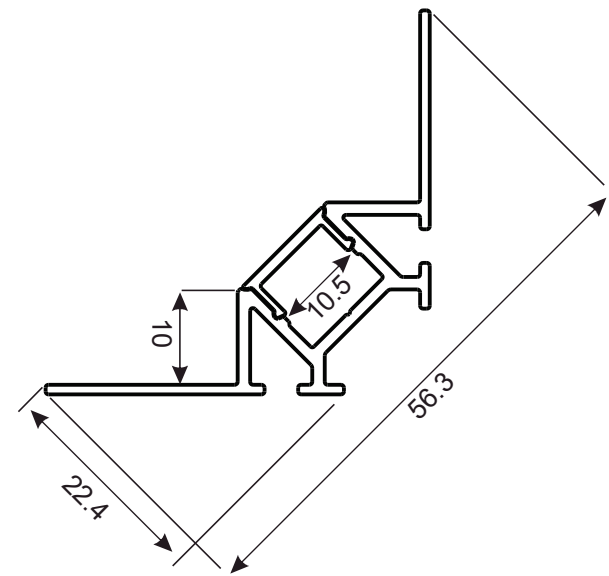

MODE NAME	: PYTHON
ALUMINIUM HEAT SINK	: ANODISED 6063-T5
COVE	: PC MILKY WHITE
FLAMABILITY	: V2 FIRE RATING FOR PC COVER
END CAP	: PP
HEAT TRANSMISSION PROPERTIES	: AL SPECIFIC HEAT IS 0.88X 10J/(kgx0C)
OPERATING TEMPERATURE	: -30° C ~ + 60° C (22° F~ 140° F)
PCB (MM)	: 8 / 10
SIZE	: 1 M / 2 M / CUSTOM
WATTS PER METER	: 9.6-14.4
CCT [K] AND COLORS	: 2300/2700/3000/3500/4000/5000/5700/6500/8000 TUNABLE/RGB/ RGBWW/R,G,B,A,P
CRI	: 80 -85 90 + ON DEMAND
LED PER METER	: 2835 PACKAGE 120 LED / METER

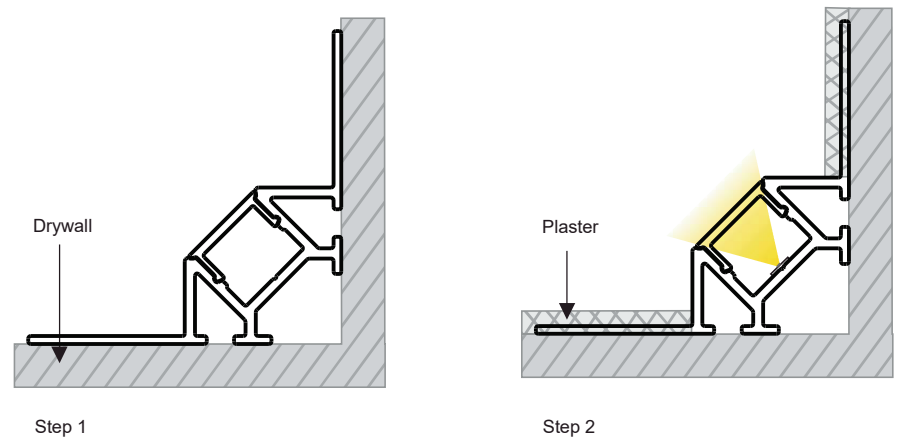


BIRD

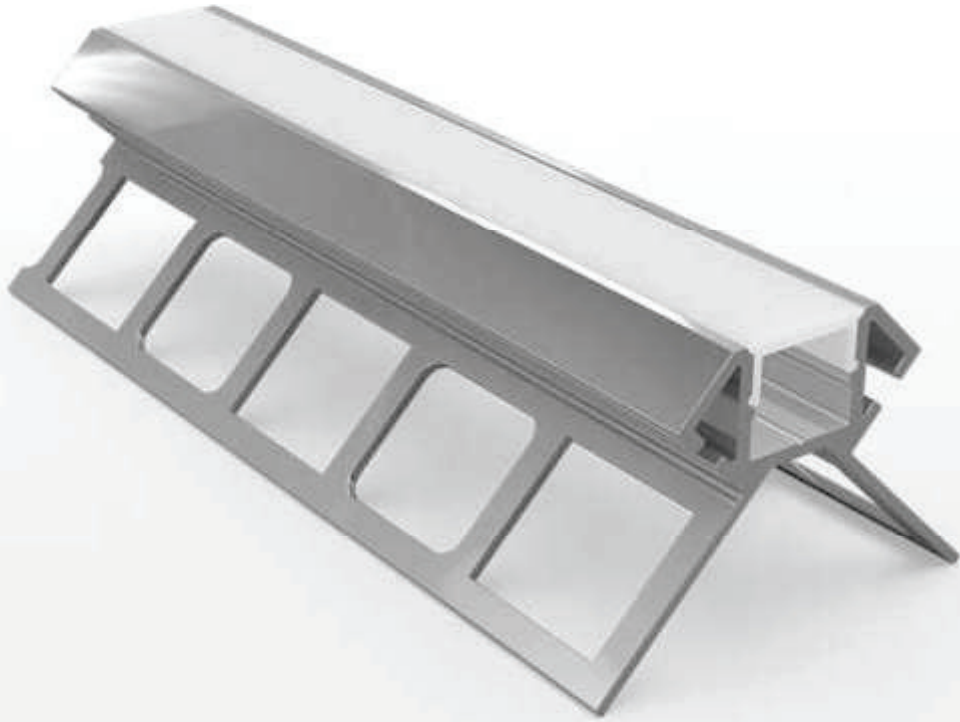


- TRIMLESS PASTER-IN TILED INTERNAL CORNER LIGHT
- Flat LED aluminum profile channel for creating a recessed light effect in a plaster wall.
- 1 meter and 2 Meter length
- Suitable for standard strip up to 8/ 10 mm width
- 11 mm overall depth 10mm to flange
- 11.5 mm recess width
- 39.4 mm wide flange
- Please also see our range of Led strips and our made to measure service.

MODE NAME	: PYTHON
ALUMINIUM HEAT SINK	: ANODISED 6063-T5
COVE	: PC MILKY WHITE
FLAMABILITY	: V2 FIRE RATING FOR PC COVER
END CAP	: PP
HEAT TRANSMISSION PROPERTIES	: AL SPECIFIC HEAT IS 0.88X 10J/(kgx0C)
OPERATING TEMPERATURE	: -30° C ~ + 60° C (22° F~ 140° F)
PCB (MM)	: 8 / 10
SIZE	: 1 M / 2 M / CUSTOM
WATTS PER METER	: 9.6-14.4
CCT [K] AND COLORS	: 2300/2700/3000/3500/4000/5000/5700/6500/8000 TUNABLE/RGB/ RGBWW/R,G,B,A,P
CRI	: 80 -85 90 + ON DEMAND
LED PER METER	: 2835 PACKAGE 120 LED / METER



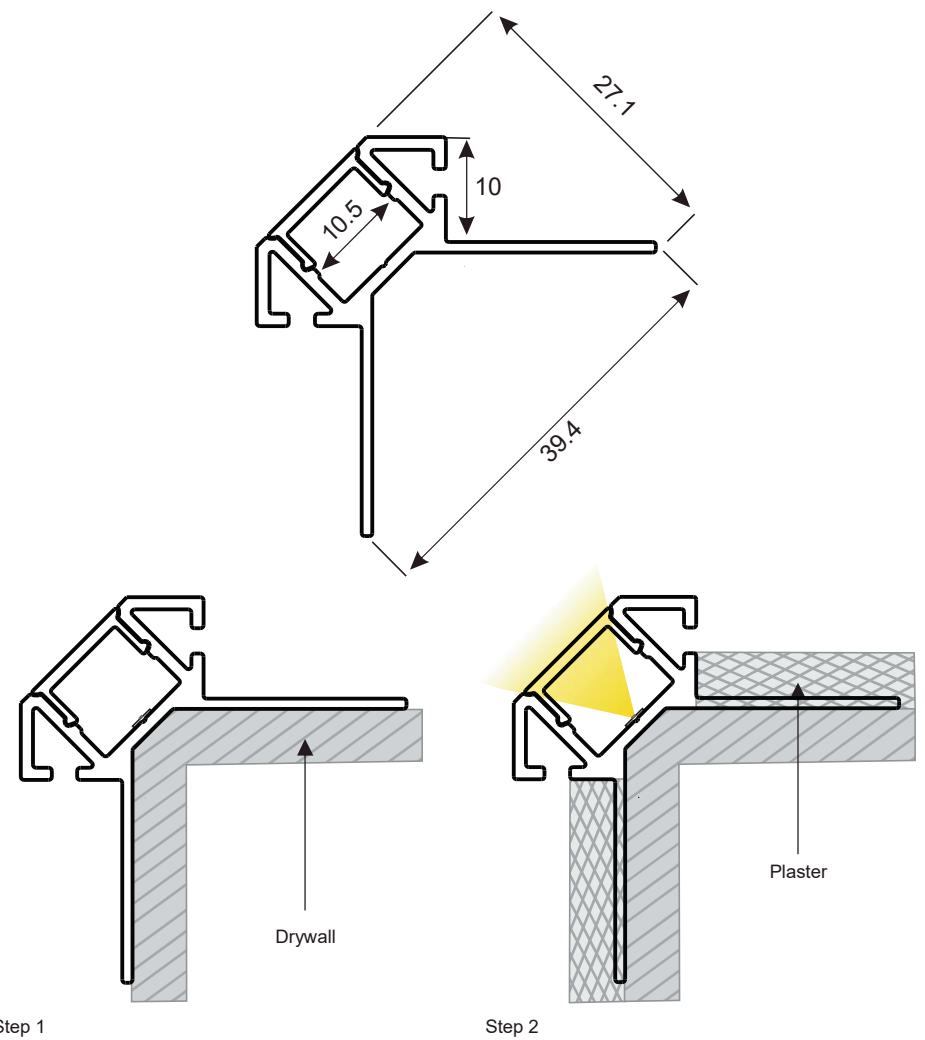


DOME

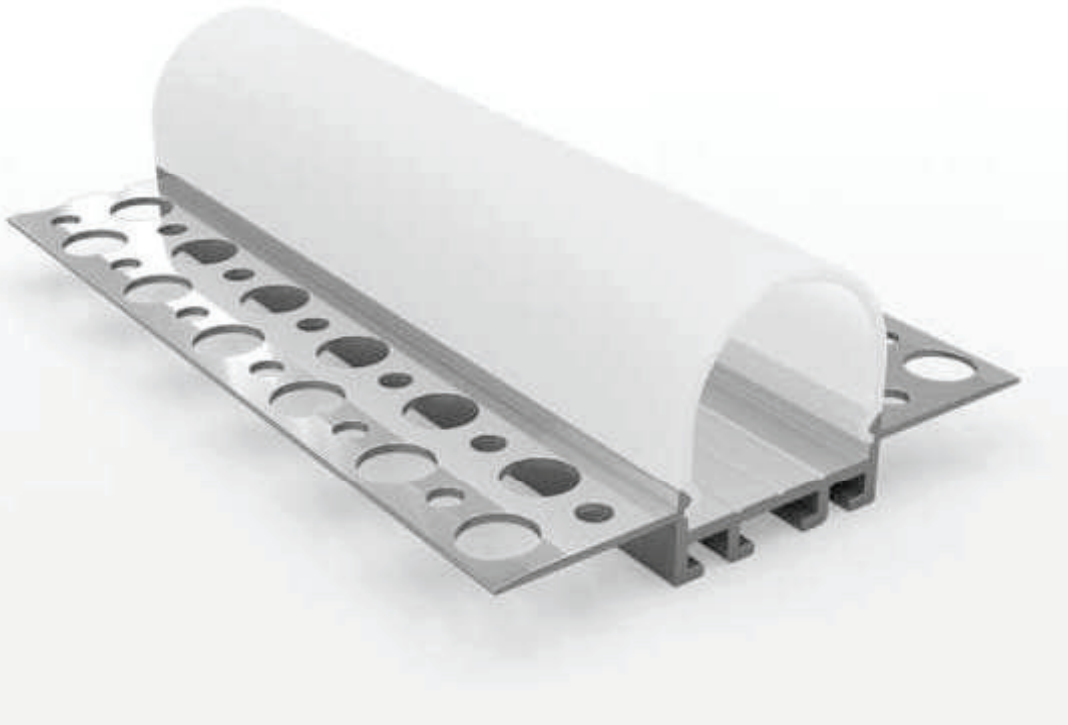


- TRIMLESS PASTER-IN FLAT LIGHT
- Flat LED aluminium profile channel for creating a recessed light effect in a plaster wall.
- 1 meter and 2 Meter length
- Suitable for standard strip up to 8/12/18 mm width
- 28 mm overall depth 7 mm to flange
- 25.4 mm recess width
- 65.4 mm wide flange
- Please also see our range of Led strips and our made to measure service

MODE NAME	: PYTHON
ALUMINIUM HEAT SINK	: ANODISED 6063-T5
COVE	: PC MILKY WHITE
FLAMABILITY	: V2 FIRE RATING FOR PC COVER
END CAP	: PP
HEAT TRANSMISSION PROPERTIES	: AL SPECIFIC HEAT IS 0.88X 10J/(kgx0C)
OPERATING TEMPERATURE	: -30° C ~ + 60° C (22° F~ 140° F)
PCB (MM)	: 8 / 10 / 12 / 18
SIZE	: 1 M / 2 M / CUSTOM
WATTS PER METER	: 9.6-19.2
CCT [K] AND COLORS	: 2300/2700/3000/3500/4000/5000/5700/6500/8000 TUNABLE/RGB/ RGBWW/R,G,B,A,P
CRI	: 80 ~85 90 + ON DEMAND
LED PER METER	: 2835 PACKAGE 120 LED / METER

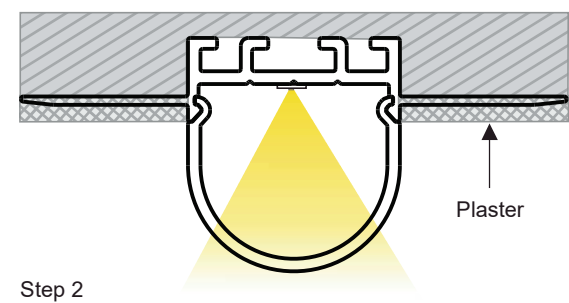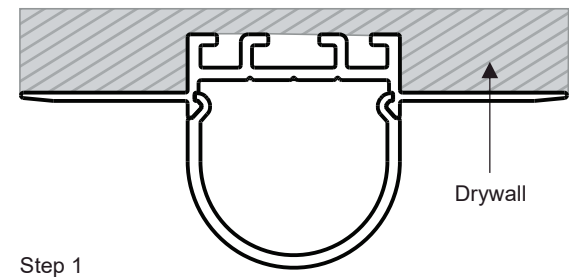
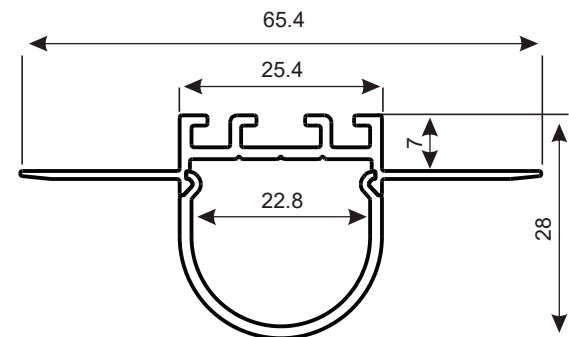


DOPE

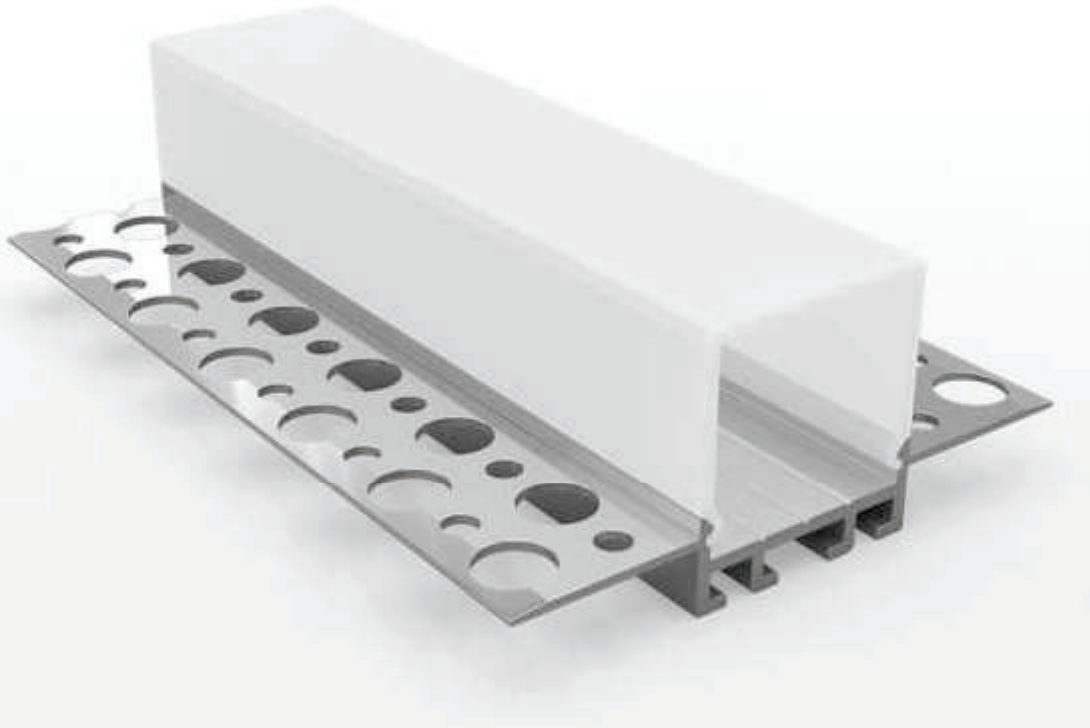


- TRIMLESS PASTER-IN FLAT LIGHT
- Flat LED aluminium profile channel for creating a recessed light effect in a plaster wall.
- 1 meter and 2 Meter length
- Suitable for standard strip up to 8/12/18 mm width
- 28 mm overall depth 7 mm to flange
- 25.4 mm recess width
- 65.4 mm wide flange
- Please also see our range of Led strips and our made to measure service.

MODE NAME	: PYTHON
ALUMINIUM HEAT SINK	: ANODISED 6063-T5
COVE	: PC MILKY WHITE
FLAMABILITY	: V2 FIRE RATING FOR PC COVER
END CAP	: PP
HEAT TRANSMISSION PROPERTIES	: AL SPECIFIC HEAT IS 0.88X 10J/(kgx0C)
OPERATING TEMPERATURE	: -30° C ~ + 60° C (22° F~ 140° F)
PCB (MM)	: 8 / 10 / 12 / 18
SIZE	: 1 M / 2 M / CUSTOM
WATTS PER METER	: 9.6-19.2
CCT [K] AND COLORS	: 2300/2700/3000/3500/4000/5000/5700/6500/8000 TUNABLE/RGB/ RGBWW/R,G,B,A,P
CRI	: 80 ~85 90 + ON DEMAND
LED PER METER	: 2835 PACKAGE 120 LED / METER

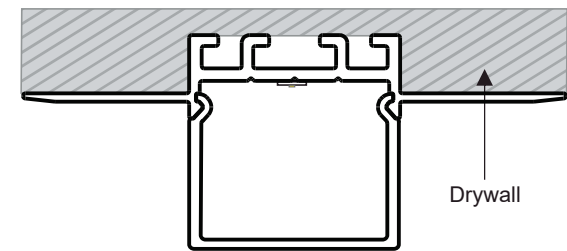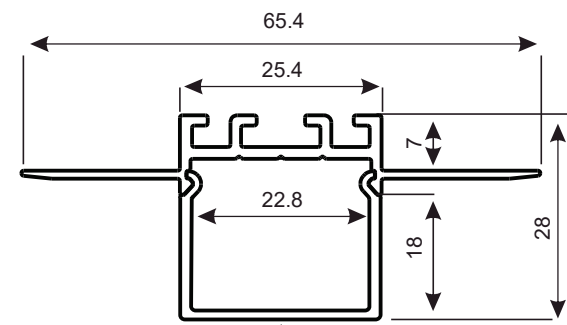

Step 1

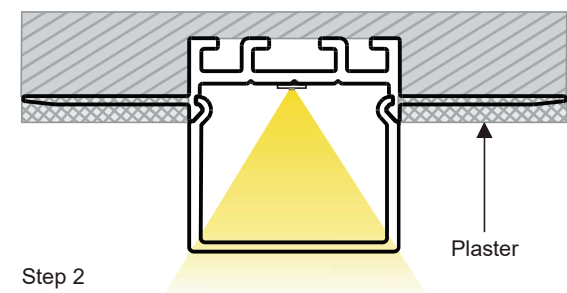

Step 2



DigiLED  [®]

**LED
LINEAR
LIGHTING**

SURFACE



OPTIMA
11.00 x 5.00 mm
○ ● ● ● ● ●



OMEGA
9.90 x 5.30 mm
○ ● ● ● ● ●



VEGA
14.70 x 8.50 mm
○ ● ● ● ● ●



MERCURY
17.10 x 7.90 mm
○ ● ● ● ● ●



BATTY
7.60 x 9.00 mm
○ ● ● ● ● ●



GLOWSTICK
10.00 x 13.00 mm
○ ● ● ● ● ●



NEON-LITE
17.10 x 7.90 mm
○ ● ● ● ● ●




NEO
13.40 x 10.00 mm
○ ● ● ● ● ●



NEO Y
5.90 x 18.40 mm
○ ● ● ● ● ●




NEO 0817
11.65 x 13.48 mm
○ ● ● ● ● ●



DECO-LINE
17.10 x 14.50 mm
○ ● ● ● ● ●



N-LINE
17.10 x 27.80 mm
○ ● ● ● ● ●




LEXO-LINE
35.40 x 35.00 mm
○ ● ● ● ● ●



TURBO-LINE
50.00 x 35.00 mm
○ ● ● ● ● ●



FLIP LINE
18.20 x 48.30 mm
○ ● ● ● ● ●

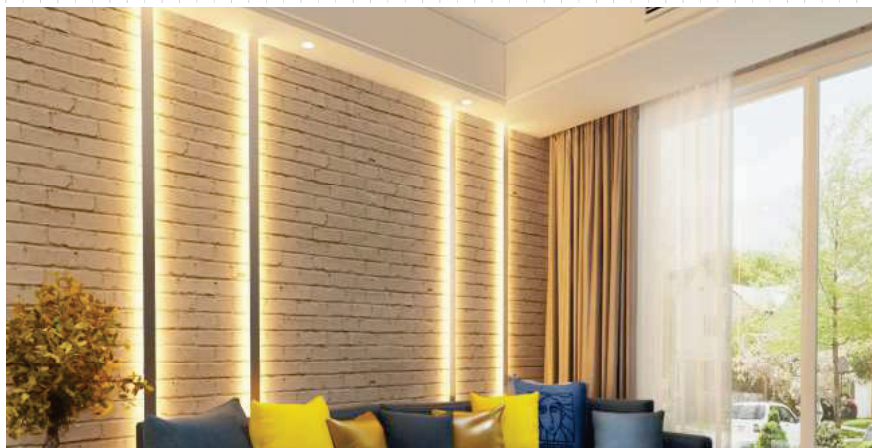

RECESSED



GLORY
11.60 x 9.00 mm
○ ● ● ● ● ●



FUR-LITE
21.00 x 8.00 mm
○ ● ● ● ● ● ●




NOOKY
21.00 x 8.70 mm
○ ● ● ● ● ● ● ●




ORIO
22.60 x 13.10 mm
○ ● ● ● ● ● ● ●




TUB-LINE
23.20 x 18.65 mm
○ ● ● ● ● ● ●




TUX-LINE
23.20 x 26.70 mm
○ ● ● ● ● ● ● ●




TUBEX XL
33.37 x 32.15 mm
○ ● ● ● ● ● ● ●




PRIMO-LITE
45.75 x 35.00 mm
○ ● ● ● ● ● ● ●




BEAM-LINE
47.00 mm x 35.00 mm
○ ● ● ● ● ● ●




WASHEX
47.00 mm x 35.00 mm
○ ● ● ● ● ● ● ●

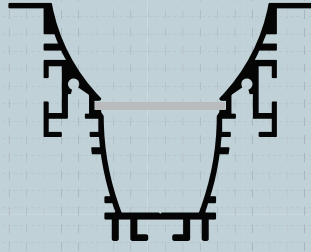


DEEPRO
65.00 x 51.00 mm
○ ● ● ● ● ● ● ●

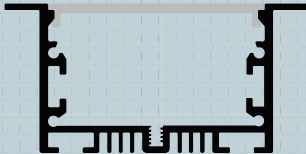


SNOW-LITE
65.00 x 32.00 mm
○ ● ● ● ● ● ● ●

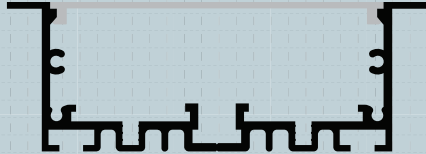


MAX-LITE
90.00 x 32.00 mm
○ ● ● ● ● ● ● ●

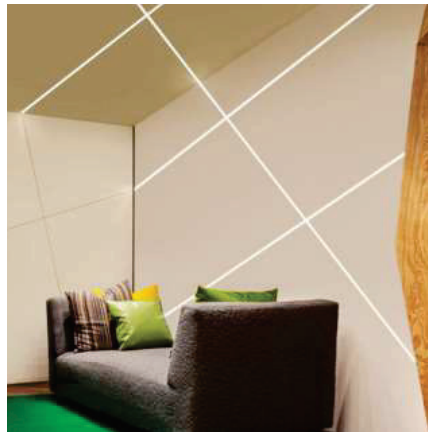


SUSPENDED

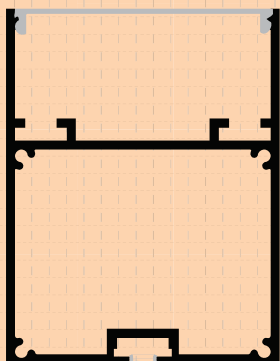


ULTRA-LINE
54.00 x 70.00 mm

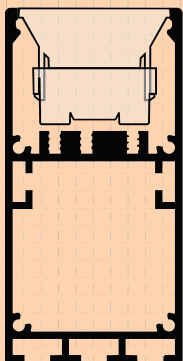


MIX-LINE
35.00 x 70.00 mm

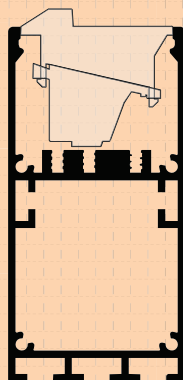


WASHLINE
35.00 x 70.00 mm

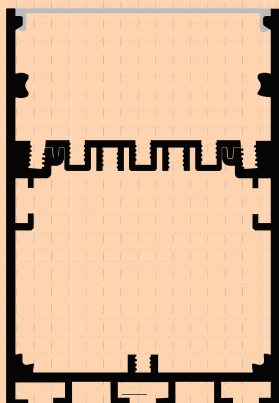

LUMI-LINE
54.00 x 78.00 mm

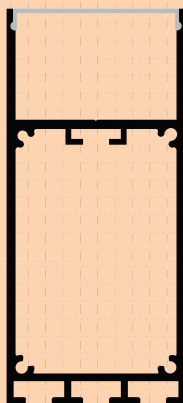

SHARP-LINE
35.30 x 78.00 mm

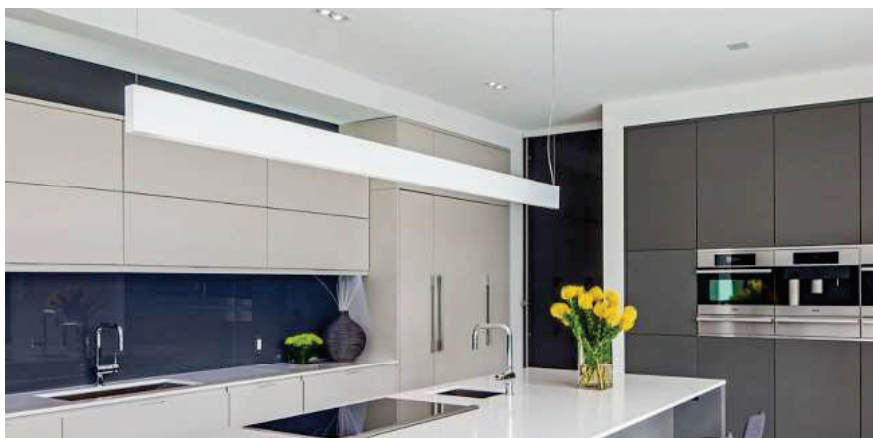


DISPLAY COUNTER



CAROLUX
12.03 x 15.81 mm




G-LUX
17.70 x 24.30 mm



CABI-LITE
17.80 x 15.80 mm




CORNER



VERSAC
16.10 x 16.10 mm




ARISTO
26.13 x 18.50 mm




ARCLIT
29.00 x 16.00 mm



STAIRCASE



STAIRLITE
56.49 x 30.24 mm

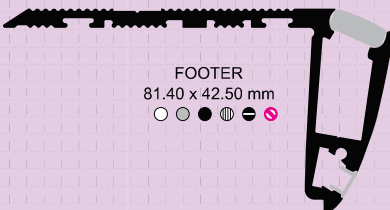


FOOTER
81.40 x 42.50 mm





DIRECTIONAL



Z22W-2 15°
17.80 x 16.00 mm



Z22W-2 30°
17.80 x 16.00 mm



Z22W-2 90°
17.80 x 16.00 mm



Z22W-2 60°
17.80 x 16.00 mm



Z22W-2
ASYMMETRIC
17.80 x 16.00 mm




Z22W-2
SIDE EMMITING
17.80 x 16.00 mm



FURNITURE




VENUS
18.00 x 18.50 mm
○ ● ● ● ●




ARMOR
22.00 x 22.00 mm
○ ● ● ● ●



CLIPRO
20.00 x 24.70 mm
○ ● ● ● ●



JUPITER
25.50 x 18.30 mm
○ ● ● ● ●



GRACE-LITE
15.00 x 29.00 mm
○ ○ ● ● ● ● ●



DELITE
12.00 x 24.00 mm
○ ○ ● ● ● ●




MAGIK
14.00 x 25.00 mm
○ ○ ● ● ● ●




MAGEDGE
21.40 x 18.43 mm
○ ○ ● ● ● ●




MASS
26.10 x 14.4 mm
○ ○ ● ● ● ●



ZONO
32.90 x 16.00 mm
○ ○ ● ● ● ●



BORDO
16.00 x 25.00 mm
○ ○ ● ● ● ●



K-LINE
27.00 x 26.80 mm
○ ○ ● ● ● ●



PULLER
32.00 x 20.50 mm
○ ○ ● ● ● ●




FRAME
32.00 x 20.00 mm
○ ○ ● ● ● ●



CLIPPER
14.50 x 11.00 mm
○ ○ ● ● ● ●



LOCK
11.60 x 35.00 mm
○ ○ ● ● ● ●

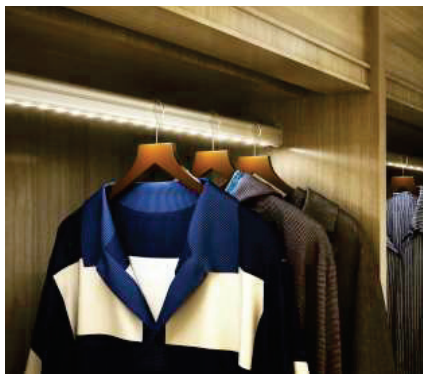

DigiLED  [®]

Presents...

SPOT-LINE

HIGH BRIGHT COMPACT WALL WASHER



Powered by



SPOT-LINE

DigiLED presents world's most Ultra-compact indoor wall washer "SPOTLINE". Available in various color temperatures and 3 different sizes. SPOTLINE is powered by high performance CREE LED and worlds No. 1 optic brand KHATOD from ITALY. What's More! We power it by the best driver Meanwell.

SPOTLINE Linear ULTRA COMPACT LED Wall washers are designed to light up walls in a linear format, with narrow output lenses, adding sophistication to all the architectural project you may have. They are easy to install to all types of structures with different types of mountings available.

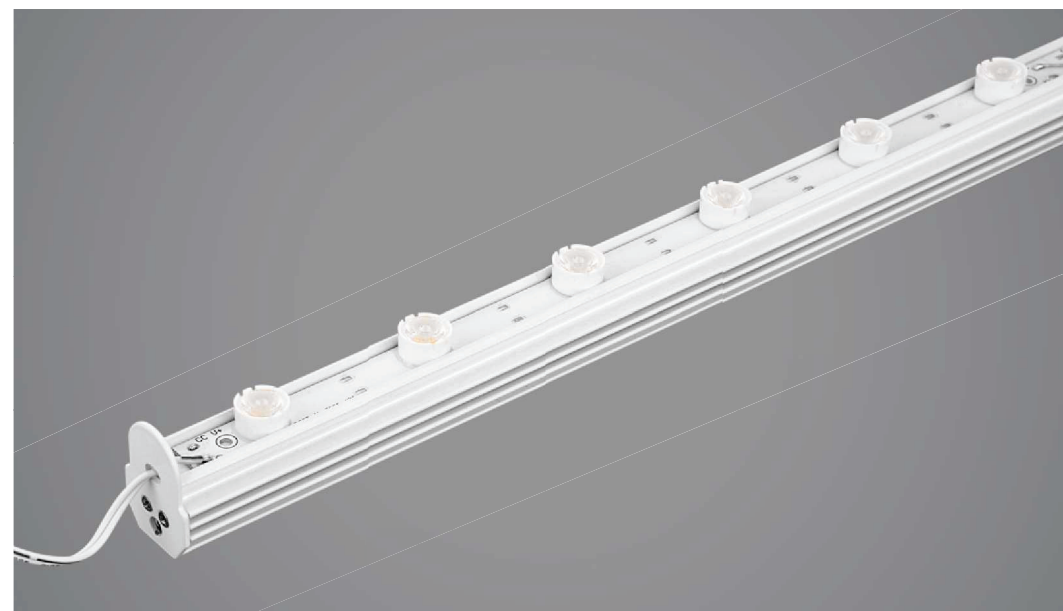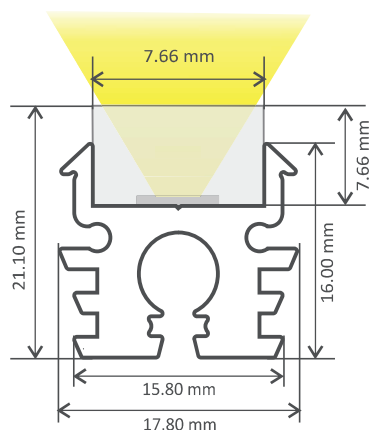

Technical Details

Product	Size (WxHxL)	LED Package	PCB	LED nos	Nominal Volt	Nominal Current	Watt/m	Input Driver
Spot-line 1000	17.8 x 16.0 x 1000 mm	3535 Cree	AL	18	54V	500 mA	30W	CC = 54V DC
Spot-line 670	17.8 x 16.0 x 670 mm	3535 Cree	AL	9	36V	500 mA	20W	CC = 36V DC
Spot-line 340	17.8 x 16.0 x 340 mm	3535 Cree	AL	6	18V	500 mA	10W	CC = 18V DC

Dimensions And Weight

Standard Lengths (mm)	Width (mm)	Height (mm)	Cable Length (mm)	Product Weight (kg)
1000 mm	17.80 mm	21.10 mm	100 mm	0.430 kg
670 mm	17.80 mm	21.10 mm	100 mm	0.225 kg
340 mm	17.80 mm	21.10 mm	100 mm	0.155 kg

Product Features

- Extruded aluminum housing and Aluminum end caps
- Homogeneous illumination
- Available in three lengths: 340mm, 670mm, 1000mm
- Available with color temperature: 2700K, 3000K, 4000K, 5000K, 6500K.
- Initial color consistency: < 3 SDC
- Luminaire efficacy: up to 90 lm/W
- Color rendering index : Ra 80+
- Type of protection : IP 20
- Lifetime: up to 30,000 hrs

Details

Life Span	Dimmable	Type of protection	Shock Resistance
30,000 hrs	Yes (Optional with dimmable driver, 0-10, Dali)	IP 20, IP 54	N/A

Finishing and Materials

Housing color	Housing material	Lens	End caps
White powder coating	Extruded Aluminum profile	ABS	Metal/ Plastic, different angles,adjustable

Mounting

Mounting Type : Surface, Ground
 Mounting Location : Wall, Floor

Accessories

End Caps



Mounting Clips



Lens Specifications

- Material : PMMA Optics
- Holder Material : ABS
- Operating temp : -20°C to +50°C
- Storage temp : -20°C to +50°C
- Beam angle : 10° (frosted only)
- Lifespan at 25°C : 30,000 hrs
- Uniform distribution of light
- UV-resistant



Standards

The lens passed the heat filament test with 650°C as required in EN 60598-1.



Photo metrical Data

Color Temperature (K)	Color Rendering Index (Ra)	Luminous Flux (lm)	Luminous Efficacy (lm/w)	Standard Deviation of color matching
2700K, 3000K, 4000K, 5000K, 6500K	Ra 80+	1680 lm	90 Lm/w	3 SDCM

Intensity Plot

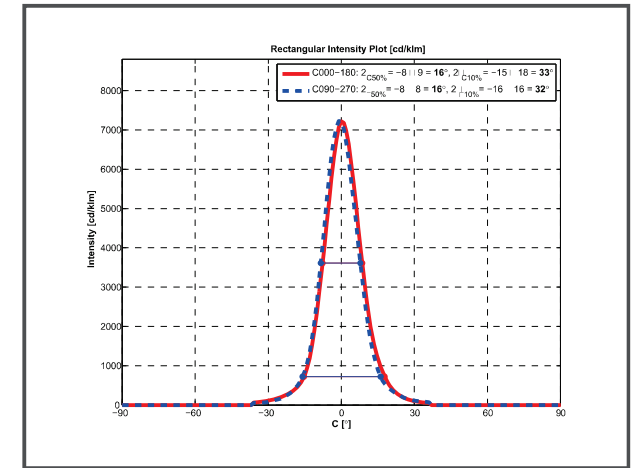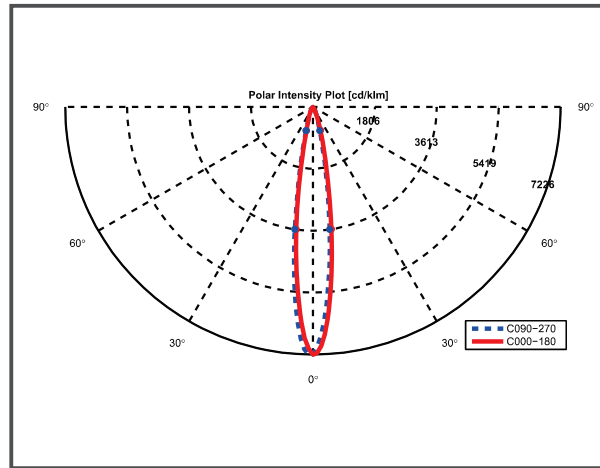

Illuminance Map

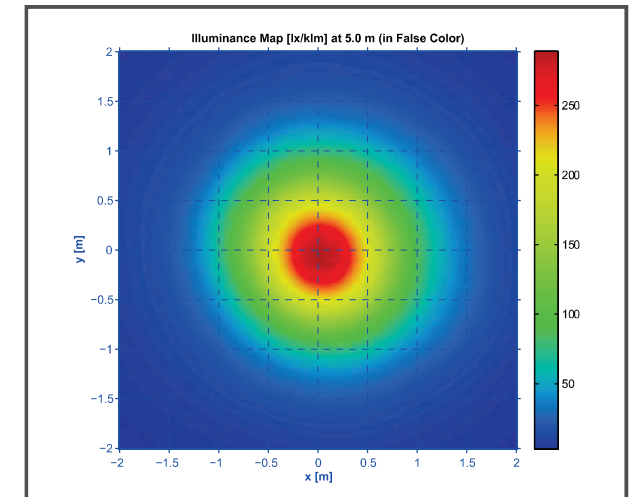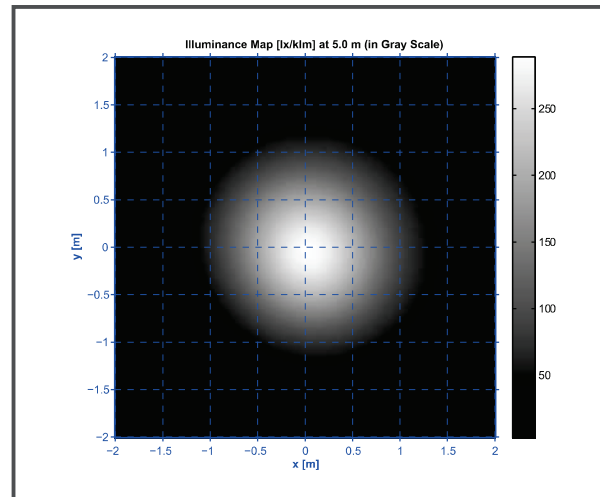

DigiLED  [®]




ILLUMINATE LIFE
INTELLIGENTLY WITH...

TRACKLINO



THE FLEXIBLE LINEAR
TRACK LIGHT SYSTEM

TRACKLINO

Choosing the most appropriate LED lighting can draw customers into your outlet, create a good first impression, and guide customers through the store, focus attention on specialty products, make prices and instructions visible and easy to read, appeal to your target market, make merchandise easy to evaluate, assist in making purchase decisions and provide a pleasant and efficient checkout. Tracklino is invented to do the exact work. What's more! Combine it with your existing spots just by simple PLUG N PLAY.

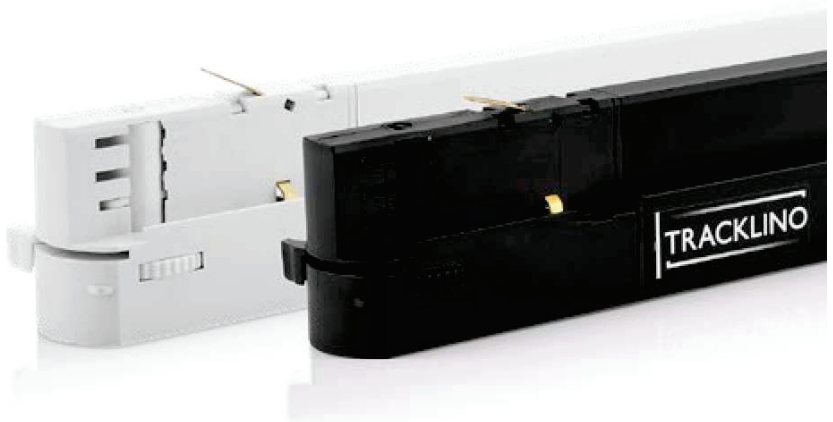


THE DIFFERENCE

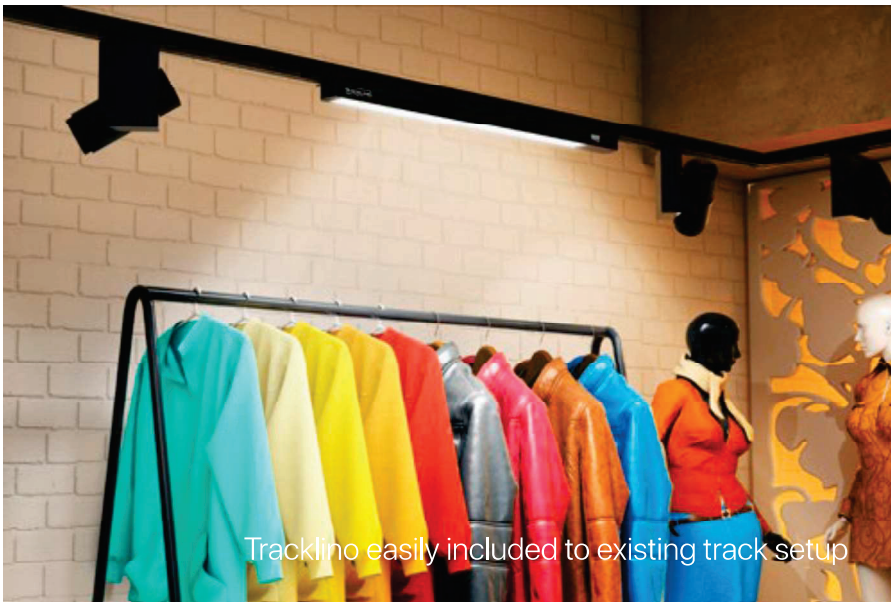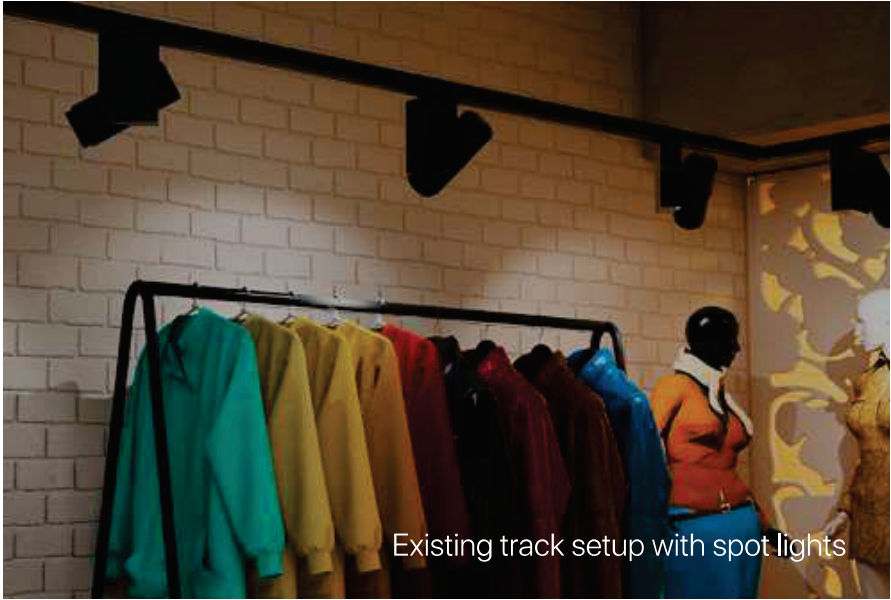

FABULOUS FEATURES OF TRACKLINO



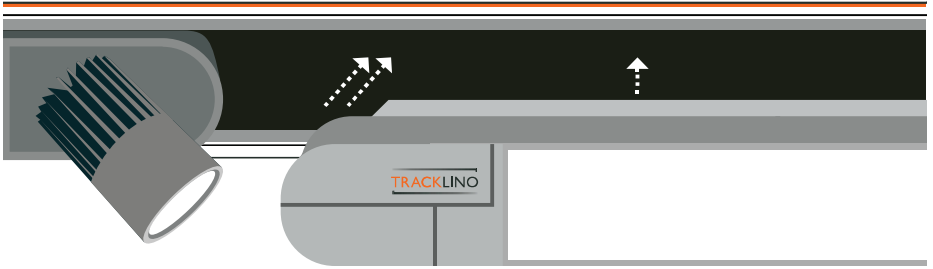

PLUG AND PLAY

Easy to install, move and shift. Just unlock and redesign your ambiance. Can be recessed or suspended as you want and reused whenever needed.



TOUGH

Solid state, vibration resistance, high shock proof lighting give longer life span not less than 30,000 working hours.



HIGH BRIGHTNESS

Using 160 lm/ w LED efficacy, we designed super light for you giving super power saving.



CUSTOMIZABLE

Combine with your existing spotlights, swap /move along with spotlights... completely customizable according to your requirement. Make it more decorative and achieve effective ambience



FLICKER FREE

Flicker free lighting, which is today's demand. Save your eyes and do more...



COST EFFECTIVE

In built driver. Specially designed slim driver fits in profile housing. High efficacy and lower wattage helps you save energy and bills.



WARRANTY

Tracklino has 3 years warranty. Also enjoy product design and technical support




UNIVERSAL FITTINGS


3 and 4 wire track systems compatible with black and white colour option



CROSS SECTION SIZES

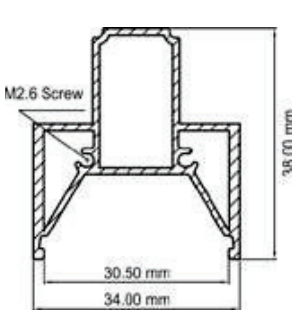

3 wire series

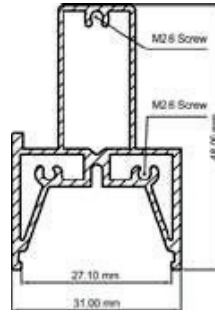

4 wire series



Linear Lighting Solutions by

DigiLED ®

2021

FERNO SERIES

LED FURNITURE LIGHTING

- RETAIL
- HOSPITALITY

- RESIDENTIAL
- COMMERCIAL



- ▶ SHELF LIGHTING
- ▶ KITCHEN LIGHTING

- ▶ CABINET LIGHTING
- ▶ WARDROBE LIGHTING

FURNITURE LIGHTING SERIES



BATTY

7.60 x 9.00 mm



GLORY

11.60 x 9.00 mm



GLOWSTICK

10.00 x 13.00 mm



CLIPPER

11.00 x 14.50 mm



CAROLUX

12.03 x 15.81 mm



MERCURY

17.10 x 7.90 mm



FUR-LITE

21.00 x 8.00 mm




EDGE

16.10 x 16.10 mm



CABI-LITE

17.80 x 15.80 mm



MAGEDGE

21.40 x 18.43 mm



DE-LITE

24.00 x 12.00 mm



MAGIK

25.00 x 14.00 mm



BORDO

25.00 x 16.00 mm





INVEE

26.5 x 10.5 mm




JUPITER

27.50 x 19.80 mm



VENUS

18.00 x 18.50 mm



ZONO

33.00 x 16.00 mm



MASS

18.00 x 9.80 mm



GLASSET

17.10 x 24.30 mm



GRACE-LITE

15.00 x 29.00 mm




ARMOR

22.00 x 22.00 mm




CLIPRO

20.00 x 25.00 mm




FRAME

32.00 x 20.00 mm




K-LINE

27.00 x 17.00 mm



PULLER

32.00 x 20.50 mm




PULLER UP / DOWN

49.8 X 17.8 mm



LOCX

11.60 x 35.00 mm



BOLD

22 X 34.5 mm





BATTY





GLORY




GLOWSTICK



CLIPPER

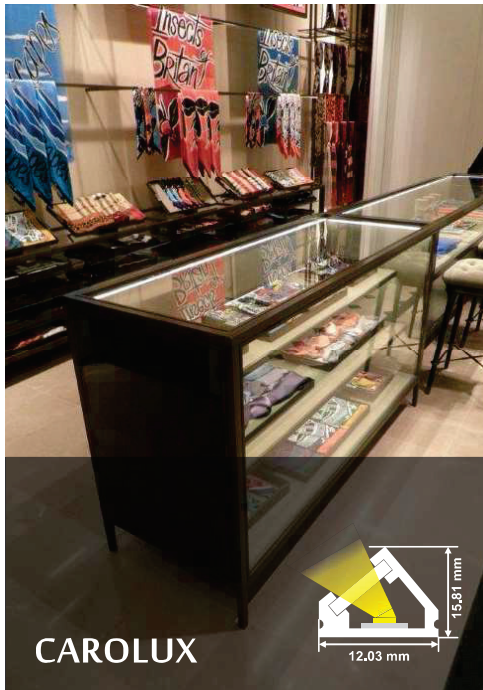


CAROLUX

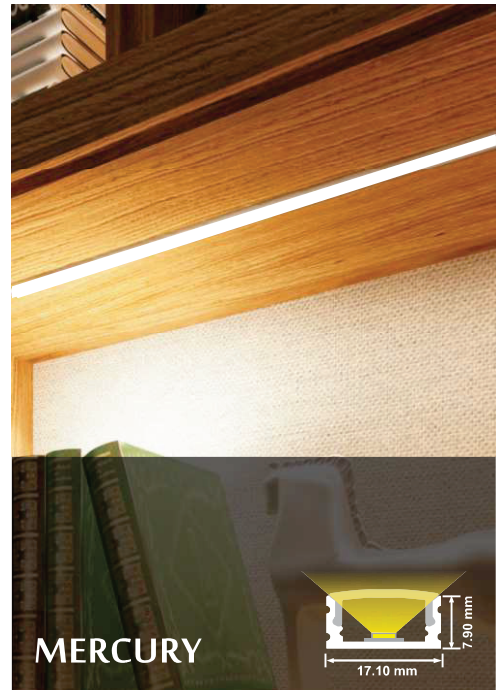

MERCURY




FUR-LITE






EDGE



CABEX



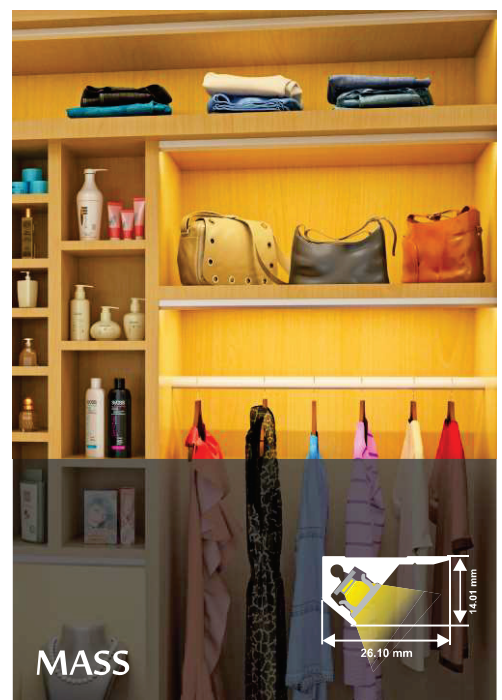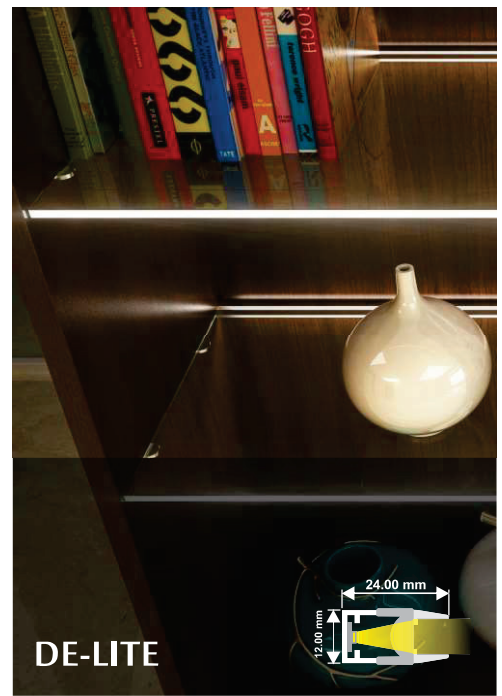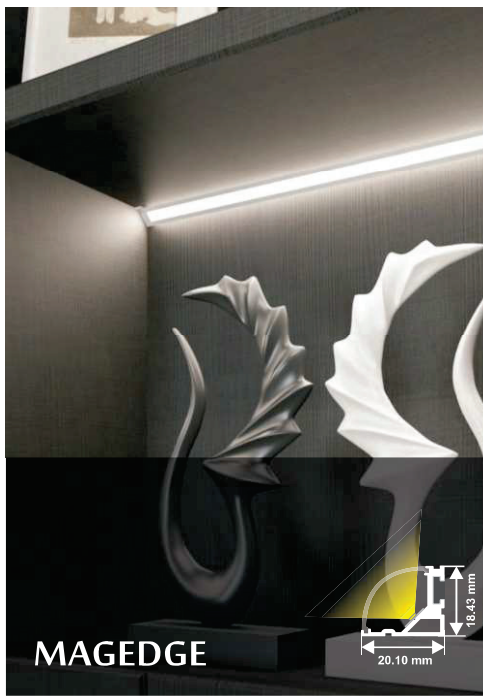




GLASSET



ZONO





ARMOR




CLIPRO





FRAME

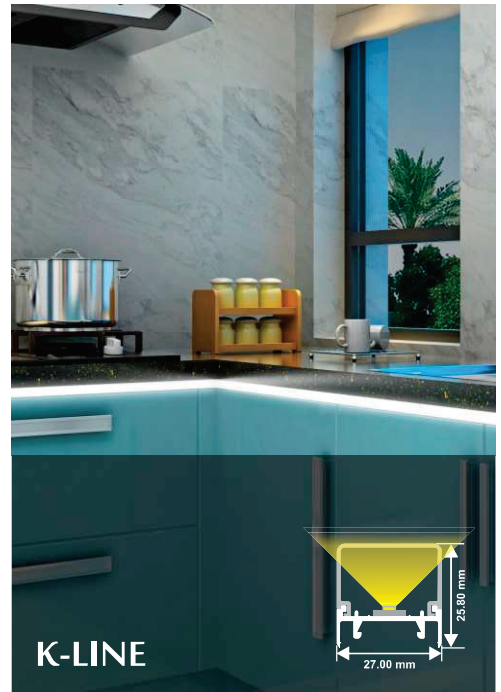


K-LINE



PULLER

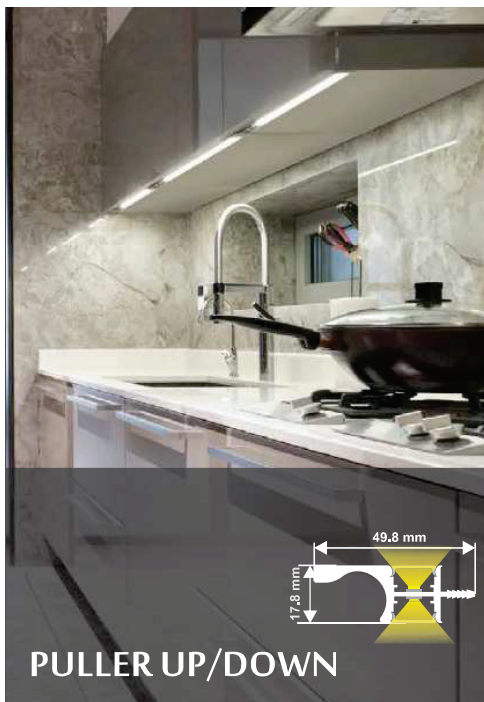

PULLER UP/DOWN



LOCX






TEJAS 700

50 x H60 mm
7 WATT / 200 mA



GRACE-LITE



BOLD



14.4 W/m 240 LED
Size : 1000 mm / Customised

**MERCURY - PIR
SENSOR**



14.4 W/m 240 LED
Size : 1000 mm / Customised

**MERCURY - SHAKE
SENSOR**




14.4 W/m 240 LED
Size : 1000 mm / Customised

**MERCURY - TOUCH
SENSOR**



14.4 W/m 240 LED
Size : 1000 mm / Customised

**DECO-LINE - PIR
SENSOR**

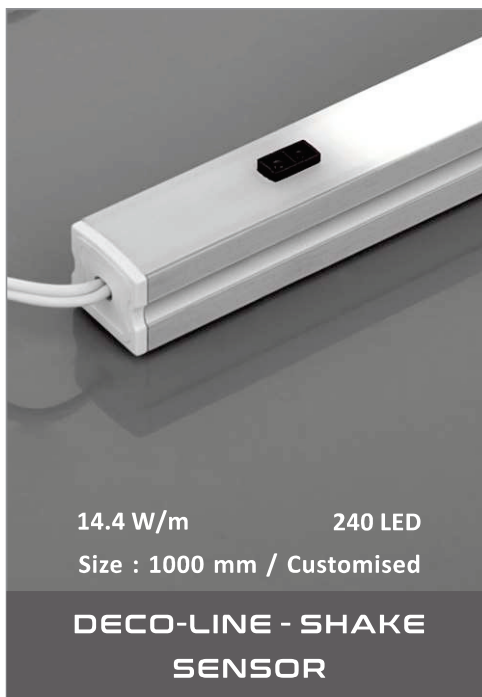

14.4 W/m 240 LED
Size : 1000 mm / Customised

**DECO-LINE - SHAKE
SENSOR**




14.4 W/m 240 LED
Size : 1000 mm / Customised

**DECO-LINE - TOUCH
SENSOR**



14.4 W/m 240 LED
Size : 1000 mm / Customised

**FUR-LITE - PIR
SENSOR**

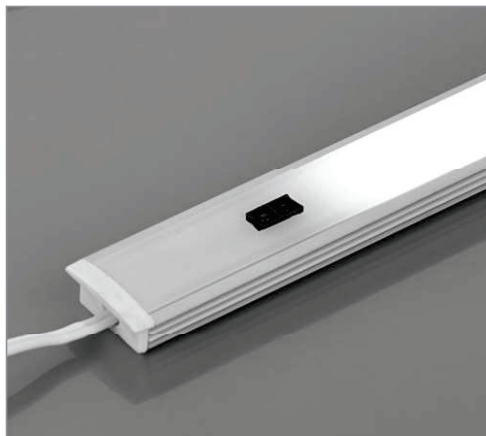

14.4 W/m 240 LED
Size : 1000 mm / Customised

**FUR-LITE - SHAKE
SENSOR**



14.4 W/m 240 LED
Size : 1000 mm / Customised

**FUR-LITE - TOUCH
SENSOR**



14.4 W/m 240 LED
Size : 1000 mm / Customised

MERCURY - SWITCH



14.4 W/m 240 LED
Size : 1000 mm / Customised

FUR-LITE - SWITCH



14.4 W/m 240 LED
Size : 1000 mm / Customised

EDGE - SWITCH



14.4 W/m 240 LED
Size : 1000 mm / Customised

MAGEDGE - SWITCH



14.4 W/m 240 LED
Size : 1000 mm / Customised

VENUS DRAWER



14.4 W/m 240 LED
Size : 1000 mm / Customised

ARMOR - PIR

CABINET LIGHTS

COIN



COSMO



ARIEL



UFO



ERIS



UJWAL



SENSORS, POWER DISTRIBUTORS & CONNECTOR WIRES



12 VDC
20W/60W

Detection : 5-8 cm
Size : 58x33 mm

DOOR TRIGGER SENSOR



12 VDC
20W/60W

Detection : 5-8 cm
Size : 58x33 mm


HAND SHAKE SENSOR



12 VDC
20W/60W

Dimmer Touch
Size : 20x13.5 mm


DIMMER TOUCH SWITCH

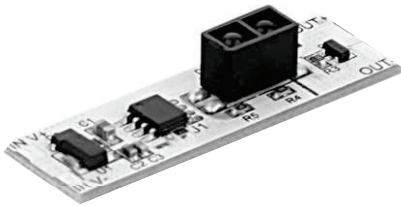

12/24 VDC
48W/94W

Detection : 8 cm
Size : 40X10X8 mm

HAND SHAKE SENSOR (PCB TYPE)

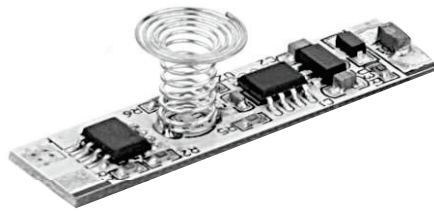

12/24 VDC
36W/72W

LED Indicator
Size : 50X7.8X10 mm

TOUCH SENSOR (PCB TYPE)



12/24 VDC
36W/72W

PIR Motion
Size : 15X11X12 mm

PIR SENSOR (PCB TYPE)



2 PART DOOR TRIGGER SENSOR



POWER DISTRIBUTOR



MALE / FEMALE CONNECTOR

DC TRACK, CABLE CHANNEL, DIMMERS & DRIVERS



DC TRACK



CABLE CHANNEL



ADJUSTABLE DIMMING CONTROLLER



SWITCH DIMMER WITH REMOTE



5 CH RGB W-WW WIFI CONTROLLER



RGB CONTROLLER WITH REMOTE



SMPS - LRS SERIES



LED DRIVER IP 20 - APV SERIES



LED DRIVER IP 67 - LPV SERIES



AC DOOR TRIGGER SENSOR



MEANWELL APV-16-12



MEANWELL APV-25-12

ACCESSORIES SEPARATELY AVAILABLE



END CAPS



DIFFUSER



METAL END CAPS




CENTER SUPPORT



MOUNTING CLIPS

MANUFACTURING UNIT

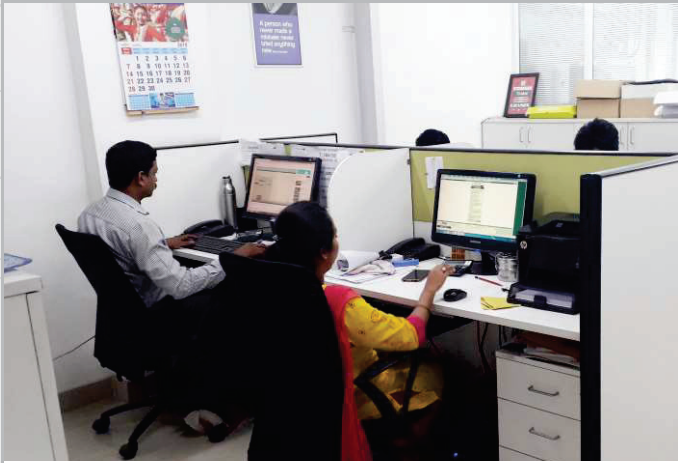


OFFICE



SMT LINE



PRODUCTION

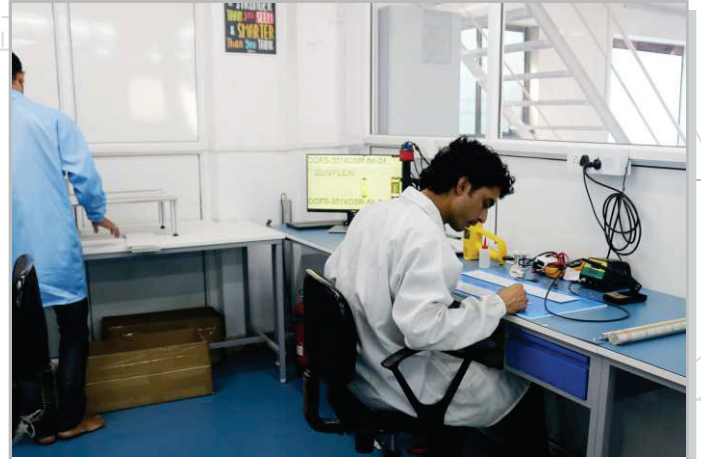

QUALITY CONTROL



STORE



PACKAGING & DISPATCH

COLORS & SYSTEM AVAILABLE





STANDARD
CRI



SPECIAL
CRI

- AMBER
- RED
- GREEN
- BLUE
- PINK
- ICE BLUE
- ORANGE
- FLAME
- YELLOW



OUR CLIENTS



And many more

Linear Lighting Solutions by
DigiLED ®

LINEAR FASHION

2021

- COMMERCIAL
- ARCHITECTURAL
- RESIDENCE
- HOSPITALITY
- LIGHTING CONTROL
- RETAIL



COMMERCIAL LIGHTING

Offices, Malls, Hospitality




DIRECTIONAL LIGHTING

SuperMarket, Retail, Wall Grazing



ARCHITECTURAL LIGHTING

Facade, Clubs, Accent Lighting

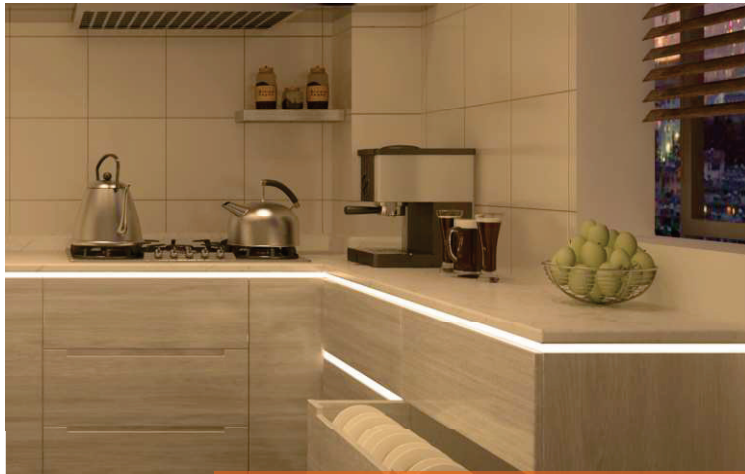

FURNITURE & KITCHEN LIGHTING

Wardrobe, Display, Cabinets



TRIMLESS LIGHTING

Offices, Residences, Guestrooms



LED RIGID & FLEXIBLE STRIPS

Various Lighting Applications



NEON FLEX
Signages, Outdoor Lighting



CONTROL SYSTEMS
Dimming Control 0-10, DALI & CCT



MEANWELL SMPS & DRIVERS
Wide Range of LED Drivers

ACCESSORIES




IR SENSOR SWITCH (DOOR TRIGGER)




IR SENSOR SWITCH (SHAKING TRIGGER)




DIMMER TOUCH SENSOR SWITCH

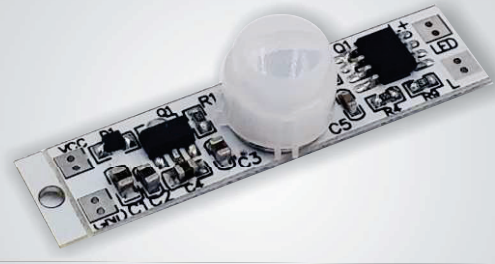

PIR SENSOR

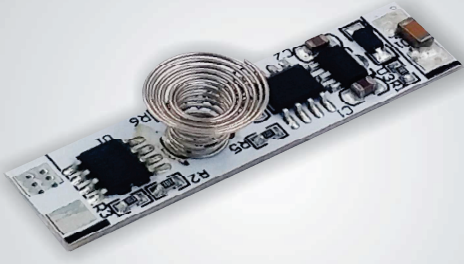


TOUCH SENSOR

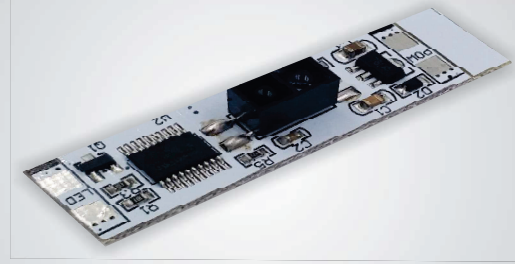


TOUCH SENSOR




DC LED TRACK

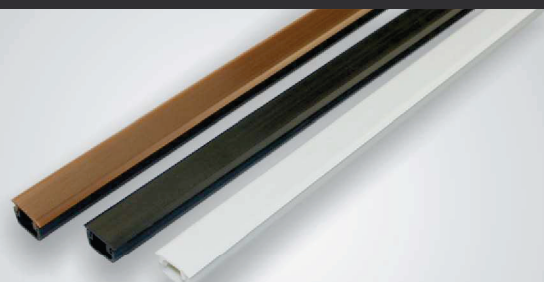

CABLE CHANNELS

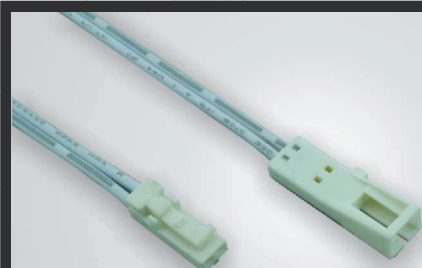

CONNECTOR

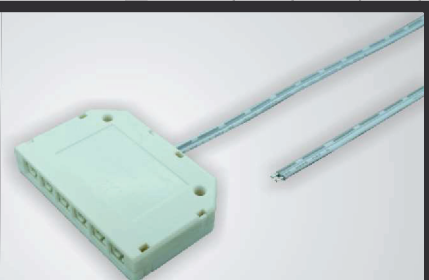

POWER DISTRIBUTOR

MANUFACTURING UNIT



OFFICE



SMT LINE



PRODUCTION



QUALITY CONTROL



STORE




PACKAGING & DISPATCH

COLORS & SYSTEMS AVAILABLE



STANDARD
CRI

SPECIAL
CRI



















OUR CLIENTS
















And many more

SURFACE

 OPTIMA 11.00 x 5.00 mm ○ ● ● ● ● ●	 OMEGA 9.90 x 5.30 mm ○ ● ● ● ● ●	 VEGA 14.70 x 8.50 mm ○ ● ● ● ● ●	 MERCURY 17.10 x 7.90 mm ○ ● ● ● ● ●
 BATTY 7.60 x 9.00 mm ○ ● ● ● ● ●	 GLOWSTICK 10.00 x 13.00 mm ○ ● ● ● ● ●	 NEON-LITE 17.10 x 7.90 mm ○ ● ● ● ● ●	 NEO 13.40 x 10.00 mm ○ ● ● ● ● ●
 NEO Y 5.90 x 18.40 mm ○ ● ● ● ● ●	 NEO 0817 11.65 x 13.48 mm ○ ● ● ● ● ●	 DECO-LINE 17.10 x 14.50 mm ○ ● ● ● ● ●	 FLIP LINE 18.2 x 48.30 mm ○ ● ● ● ● ●
 N-LINE 17.10 x 27.80 mm ○ ● ● ● ● ●	 LEXO-LINE 35.40 x 35.00 mm ○ ● ● ● ● ●	 TURBO-LINE 50.00 x 35.00 mm ○ ● ● ● ● ●	
 MINICOVE 47.6 x 80.0 mm ○ ● ● ● ● ●			






RECESSED

 GLORY 11.60 x 9.00 mm ○ ● ● ● ● ●	 FUR-LITE 21.00 x 8.00 mm ○ ● ● ● ● ●	 NOOKY 21.00 x 8.70 mm ○ ● ● ● ● ●	 ORIO 22.60 x 13.10 mm ○ ● ● ● ● ●	 TUB-LINE 23.20 x 18.65 mm ○ ● ● ● ● ●	 TUX-LINE 23.20 x 26.70 mm ○ ● ● ● ● ●	 TUBEX XL 33.37 x 32.15 mm ○ ● ● ● ● ●
 PRIMO-LITE 45.75 x 35.00 mm ○ ● ● ● ● ●	 BEAM-LINE 47.00 mm x 35.00 mm ○ ● ● ● ● ●	 WASHEX 47.00 mm x 35.00 mm ○ ● ● ● ● ●	 DEEPRO 65.00 x 51.00 mm ○ ● ● ● ● ●	 SNOW-LITE 65.00 x 32.00 mm ○ ● ● ● ● ●	 MAX-LITE 90.00 x 32.00 mm ○ ● ● ● ● ●	



CORNER

 VERSAC 16.10 x 16.10 mm ○ ● ● ● ● ●	 ARISTO 26.13 x 18.50 mm ○ ● ● ● ● ●	 ARCLIT 29.00 x 16.00 mm ○ ● ● ● ● ●
--	--	--






SUSPENDED

 ULTRA-LINE 54.00 x 70.00 mm ○ ● ● ● ● ●	 LUMI-LINE 54.00 x 78.00 mm ○ ● ● ● ● ●	 SHARP-LINE 35.30 x 78.00 mm ○ ● ● ● ● ●	 MIX-LINE 35.00 x 70.00 mm ○ ● ● ● ● ●	 WASHLINE 35.00 x 70.00 mm ○ ● ● ● ● ●
--	---	--	--	--

STAIRCASE

 STAIRLITE 56.49 x 30.24 mm ○ ● ● ● ● ●	 FOOTER 81.40 x 42.50 mm ○ ● ● ● ● ●
---	--

DIRECTIONAL

 Z22W-2 15° 17.80 x 16.00 mm ○ ● ● ● ● ●	 Z22W-2 30° 17.80 x 16.00 mm ○ ● ● ● ● ●	 Z22W-2 60° 17.80 x 16.00 mm ○ ● ● ● ● ●	 Z22W-2 90° 17.80 x 16.00 mm ○ ● ● ● ● ●	 Z22W-2 ASYMMETRIC 17.80 x 16.00 mm ○ ● ● ● ● ●
--	--	--	--	---

- RAW ● SILVER ANODIZED ● BLACK ANODIZED ● WHITE POWDER COATING
- BLACK POWDER COATING ● WOODEN TEXTURE COATING ● DOTLESS

DIFFUSED
LINEAR
AL SUPPORT
PROJECTS
DECORATIVE LIGHTING




STAIRCASE
LIGHTING
UNIFORM
STRONG TECHNIC

DIRECT & INDIRECT
PROJECT PLANNING
ARCHITECTURAL
RECESSED
SURFACE
WARDROBE

INDOOR & OUTDOOR

Accessories Separately Available

**LED
LINEAR
LIGHTING**

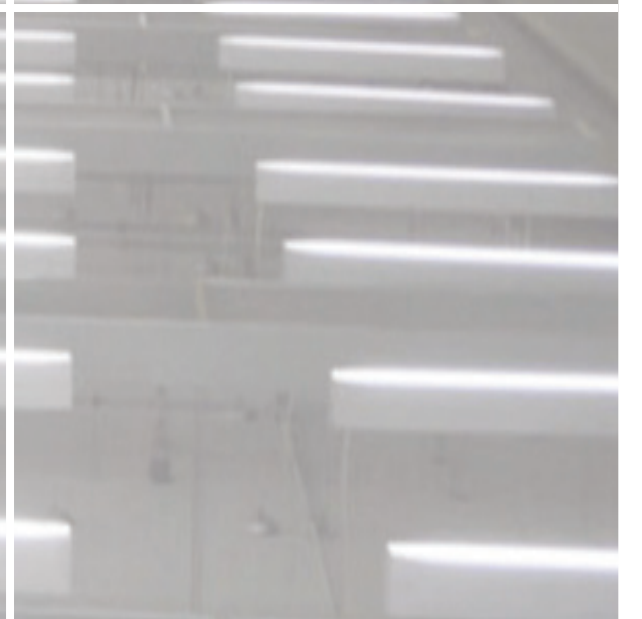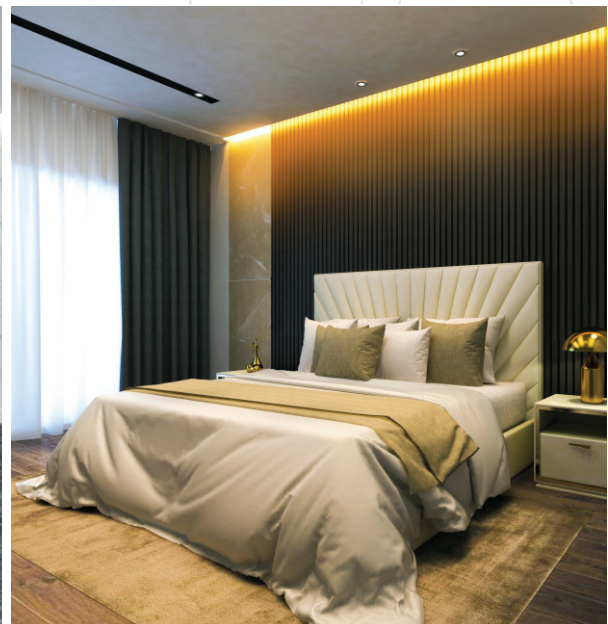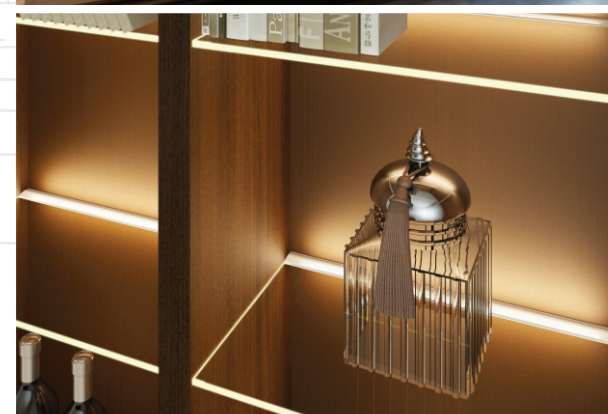

Get in Touch with Us

Contact Us:

Mr. Laxmikant Laddha: 09822332340

Giriraj Laddha: 09881245431

Rahul Laddha: 09881245432

 sales@rajelectricals.co.in

 <https://rajelectricals.co.in/>



Lighting Store:

583, Narayan Peth, Jaldhara Society,
Near Kanyashala, Pune-411030

Phone: (020) 24455293, 24461156,
24481583, 24486306, 24492424



Electrical Store:

353/2, Shaniwar Peth, Ramanbaug
Co-operative Hsg Society, Near
Ramanbaug School, Pune-411030.

Phone: 098812 45432



[rajelectricalspune](https://www.facebook.com/rajelectricalspune)



[raj__electricals](https://www.instagram.com/raj__electricals)